

# Hf MeffGate T5.15

Fix Interface Specifications (Private information)

April 28, 2023

## Changes made in the latest revision

Outlined below are the main changes made since version T5.13:

- New Order and Execution Report messages: new block Stipulations for Retail Client Indicator

**Outlined below are the main changes from the documentation published on 23 November 2022:**

- New Order, Order Modification Request and Registration Instructions Quote Order parameters messages: valid values for SelfMatchPreventionID field are > 0, <= 999.

**Outlined below are the main changes from the documentation published on 11 January 2023:**

- Adaptation of the document to the new corporate template

# Contents

<b>1</b>	<b>INTRODUCTION.....</b>	<b>1</b>
1.1	Scope of this manual .....	1
1.2	Private information .....	2
1.3	Structure of manual .....	2
1.4	Format of the message definition tables.....	3
1.5	Related documents .....	4
<b>2</b>	<b>IMPLEMENTATION DECISIONS.....</b>	<b>5</b>
2.1	Description.....	5
2.2	Fields ignored .....	5
2.3	Unsupported fields .....	5
2.4	Length of String type.....	5
2.5	Maximum length of message.....	5
2.6	Encryption .....	5
2.7	Identification of the HF MEFFGate FIX protocol .....	5
<b>3</b>	<b>FIX SESSION .....</b>	<b>6</b>
3.1	Introduction .....	6
3.2	FIX session and communication session .....	6
3.3	Identification of the FIX session .....	6
3.4	Client software and FIX sessions .....	7
3.5	Message routing from different users through an unique FIX session (multilogon connection) .....	7
3.6	Start of the FIX session .....	7
3.7	Synchronisation at application level.....	8
3.8	High availability .....	8
3.9	Reception of information for all traders of the member .....	8
3.10	Reception of information on actions taken on behalf of the trader .....	9
3.11	Message flow .....	9
3.12	Annotations and adaptations of FIX 5.0.....	10
3.13	Definition of messages .....	12
3.13.1	Standard Message Header .....	12
3.14	List of messages .....	14
3.14.1	Standard Message Trailer.....	15
3.14.2	Logon (Msg Type = A) .....	16
3.14.3	Logout (Msg Type = 5) .....	19
3.14.4	Heartbeat (Msg Type = 0).....	20
3.14.5	Test Request (Msg Type = 1) .....	21
3.14.6	Reject (Msg Type = 3).....	22
<b>4</b>	<b>GENERAL CONVENTIONS IN APPLICATION MESSAGES.....</b>	<b>23</b>
4.1	Order identification.....	23
4.1.1	ClOrdID.....	23

4.1.2	OrderID .....	23
4.1.3	SecondaryOrderID .....	23
4.1.4	SecondaryExecID .....	24
4.2	Trade identification .....	24
4.2.1	ExecID .....	24
4.2.2	TrdMatchID .....	24
4.3	Parties block .....	25
4.4	Instrument block .....	28
4.4.1	SecurityType [167] .....	29
4.4.2	Underlying asset (SecurityID [48] field) .....	29
4.4.3	Expiration (MaturityMonthYear [200] field) .....	29
4.4.4	Contract code (Symbol [55] field) or other alternatives .....	29
4.4.5	Combination of selection criteria .....	29
4.5	MultipleCharValue and SeqNum data types .....	30
4.6	Timestamp format .....	30
4.7	Implied subscription to Trading Session Status Request, Security List Request and Market Data Request .....	30
<b>5</b>	<b>COMMON APPLICATION MESSAGES.....</b>	<b>32</b>
5.1	Introduction .....	32
5.2	Network communication status .....	32
5.3	Password change .....	32
5.4	Rejection of application messages .....	32
5.5	List of messages .....	32
5.6	Message flow .....	34
5.7	Annotations and adaptations of FIX 5.0.....	34
5.8	Definition of messages .....	35
5.8.1	Network Counterparty System Status Request (Msg Type = BC).....	35
5.8.2	Network Counterparty System Status Response (Msg Type = BD) .....	36
5.8.3	User Response (Msg Type = BF) .....	37
5.8.4	User Request (Msg Type = BE).....	38
5.8.5	Business Message Reject (MsgType = j) .....	39
<b>6</b>	<b>INDICATIONS OF INTEREST.....</b>	<b>40</b>
6.1	Introduction .....	40
6.2	Description.....	40
6.3	List of messages .....	40
6.4	Message flow .....	40
6.5	Annotations and adaptations of FIX 5.0.....	41
6.6	Definition of messages .....	42
6.6.1	Indication of Interest sent to HF MEFFGate (Msg Type = 6) .....	42
6.6.2	Indication of Interest sent by HF MEFFGate (Msg Type = 6).....	43
<b>7</b>	<b>ORDER MANAGEMENT AND TRADES NOTIFICATION.....</b>	<b>44</b>
7.1	Introduction .....	44
7.2	Order management on behalf of a trader .....	44
7.3	Enter orders .....	45
7.3.1	Description .....	45
7.3.2	Order entry status .....	45
7.3.3	Supported order types and validity of orders.....	45
7.3.4	Order persistence on connection loss .....	45

7.3.5	List of messages .....	47
7.3.6	Message flow .....	47
7.3.7	Annotations and adaptations of FIX 5.0 .....	48
7.4	Modify orders .....	49
7.4.1	Description .....	49
7.4.2	Order modification request status .....	50
7.4.3	List of messages .....	50
7.4.4	Message flow .....	50
7.4.5	Annotations and adaptations of FIX 5.0 .....	52
7.5	Cancel orders .....	53
7.5.1	Description .....	53
7.5.2	Status of order cancellation request .....	53
7.5.3	List of messages .....	54
7.5.4	Message flow .....	54
7.5.5	Annotations and adaptations of FIX 5.0 .....	55
7.6	Mass cancellation of orders .....	56
7.6.1	Description .....	56
7.6.2	Selection criteria .....	56
7.6.3	Status of mass cancellation request .....	56
7.6.4	ClOrdID field .....	56
7.6.5	List of messages .....	58
7.6.6	Message flow .....	58
7.6.7	Annotations and adaptations of FIX 5.0 .....	59
7.7	Notification of execution .....	59
7.7.1	Description .....	59
7.7.2	Trade cancellation / Trade amendment .....	59
7.7.3	List of messages .....	59
7.7.4	Message flow .....	60
7.7.5	Annotations and adaptations of FIX 5.0 .....	60
7.8	Order Status Request .....	61
7.8.1	Description .....	61
7.8.2	List of messages .....	61
7.8.3	Message flow .....	61
7.8.4	Annotations and adaptations of FIX 4.4 .....	61
7.9	Definition of messages .....	62
7.9.1	New Order - Single (Msg Type = D) .....	62
7.9.2	Order Cancel Request (Msg Type = F) .....	66
7.9.3	Order Modification Request (Msg Type = G) .....	67
7.9.4	Execution Report (Msg Type = 8) .....	72
7.9.5	Order Cancel Reject (Msg Type = 9) .....	84
7.9.6	Order Status Request (Msg Type = H) .....	86
7.9.7	Order Mass Cancel Request (Msg Type = q) .....	87
7.9.8	Order Mass Cancel Report (Msg Type = r) .....	89
<b>8</b>	<b>STRATEGIES .....</b>	<b>90</b>
8.1	Introduction .....	90
8.2	List of messages .....	90
8.3	Message flow .....	90
8.4	Annotations and adaptations of FIX 5.0 .....	91
8.5	Definition of messages .....	92
8.5.1	Security Definition Request (Msg Type = c) .....	92
8.5.2	Security Definition (Msg Type = d) .....	93
<b>9</b>	<b>DELTA PROTECTION, KILL BUTTON, MANAGEMENT OF FILTERS AND PERMISSIONS .....</b>	<b>95</b>
9.1	Introduction .....	95
9.2	RegistID .....	95

9.3	Delta protection + Account configuration and MiFiD II tags for quotes .....	97
9.3.1	List of messages .....	98
9.3.2	Message flow .....	98
9.3.3	Annotations and adaptations of FIX 5.0 .....	99
9.3.4	Registration Instructions (Msg Type = o) Quote Order Parameters .....	100
9.3.5	Registration Instructions Response (Msg Type = p) Quote Order Parameters .....	104
9.4	Kill Button.....	108
9.4.1	List of messages .....	108
9.4.2	Message flow .....	108
9.4.3	Annotations and adaptations of FIX 5.0 .....	108
9.4.4	Registration Instructions (Msg Type = o) for Kill Button .....	109
9.4.5	Registration Instructions Response (Msg Type = p) for Kill Button .....	110
9.5	Management of Price Filters .....	112
9.5.1	List of messages .....	112
9.5.2	Message flow .....	112
9.5.3	Annotations and adaptations of FIX 5.0 .....	112
9.5.4	Registration Instructions (Msg Type = o) for Price Filters .....	114
9.5.5	Registration Instructions Response (Msg Type = p) for Price Filters .....	117
9.6	Management of Volume Filters.....	120
9.6.1	List of messages .....	120
9.6.2	Message flow .....	120
9.6.3	Annotations and adaptations of FIX 5.0 .....	121
9.6.4	Registration Instructions (Msg Type = o) for Volume Filters .....	122
9.6.5	Registration Instructions Response (Msg Type = p) for Volume Filters .....	124
9.7	Management for HFT – IFTL (Maximum variation of the position) .....	126
9.7.1	List of messages .....	126
9.7.2	Message flow .....	126
9.7.3	Annotations and adaptations of FIX 5.0 .....	126
9.7.4	Registration Instructions (Msg Type = o) for IFTL .....	127
9.7.5	Registration Instructions Response (Msg Type = p) for IFTL .....	129
9.8	Management of Permissions .....	131
9.8.1	List of messages .....	131
9.8.2	Message flow .....	131
9.8.3	Annotations and adaptations of FIX 5.0 .....	131
9.8.4	Registration Instructions (Msg Type = o) for Permissions Management .....	133
9.8.5	Registration Instructions Response (Msg Type = p) for Permissions Management .....	135
9.9	Drop copy of information about ClientDataID entered from a binary protocol connection.....	137
9.9.1	List of messages .....	137
9.9.2	Message flow .....	137
9.9.3	Annotations and adaptations of FIX 5.0 .....	137
9.9.4	Registration Instructions Response (Msg Type = p) for ClientDataID Drop-copy information .....	138

## 10 QUOTE MANAGEMENT.....141

10.1	Introduction .....	141
10.2	Configuration of the quote parameters: Account configuration and MiFiD II tags and delta protection ....	141
10.2.1	Introduction .....	141
10.2.2	Description .....	141
10.3	Enter quotes .....	142
10.3.1	Description .....	142
10.3.2	List of messages .....	142
10.3.3	Message flow .....	142
10.3.4	Annotations and adaptations of FIX 5.0 .....	144
10.4	Modify quotes.....	145
10.4.1	Description .....	145
10.4.2	List of messages .....	145
10.4.3	Message flow .....	145
10.4.4	Annotations and adaptations of FIX 5.0 .....	146
10.5	Cancel quotes .....	147
10.5.1	Description .....	147
10.5.2	Selection criteria .....	147
10.5.3	List of messages .....	147

10.5.4	Message flow .....	148
10.5.5	Annotations and adaptations of FIX 5.0 .....	149
10.6	Notification of quote execution .....	150
10.6.1	Description .....	150
10.6.2	List of messages .....	150
10.6.3	Message flow .....	150
10.6.4	Annotations and adaptations of FIX 5.0 .....	150
10.7	Quote Status Request .....	151
10.7.1	Description .....	151
10.7.2	List of messages .....	151
10.7.3	Message flow .....	151
10.7.4	Annotations and adaptations of FIX 4.4 .....	151
10.8	Definition of messages .....	152
10.8.1	Quote (Msg Type = S) .....	152
10.8.2	Quote Cancel (Msg Type = Z) .....	153
10.8.3	Quote Status Request (Msg Type = a) .....	154
10.8.4	Quote Status Report (Msg Type = AI) .....	155
<b>11</b>	<b>CROSS TRADES .....</b>	<b>159</b>
11.1	Introduction .....	159
11.2	Entry of cross trades between different members .....	159
11.3	Acceptance of cross trades between different members .....	160
11.4	Entry of cross trades within the member .....	160
11.5	Price and Effective amount .....	160
11.6	Cross trade groups and cash market cross trades .....	161
11.7	Cross trade rejected by the System .....	161
11.8	List of messages .....	161
11.9	Message flow .....	161
11.10	Annotations and adaptations of FIX 5.0 .....	163
11.11	Definition of messages .....	164
11.11.1	Trade Capture Report (Msg Type = AE) sent to HF MEFFGate .....	164
11.11.2	Trade Capture Report (Msg Type = AE) sent by HF MEFFGate .....	171
<b>12</b>	<b>REQUEST FOR QUOTE MODALITY .....</b>	<b>178</b>
12.1	Introduction .....	178
12.2	Description .....	178
12.3	Message list .....	180
12.4	Message flow .....	180
12.5	Annotations and adaptations of FIX 5.0 .....	182
12.6	Message definition .....	183
12.6.1	Quote Request (Msg Type = R) .....	183
12.6.2	Quote Response sent by HF MEFFGate (RFQ status) (Msg Type = AJ) .....	187
12.6.3	Quote Response sent to HF MEFFGate (Msg Type = AJ) .....	193
12.6.4	Quote Request Reject rejecting a Quote Request (Msg Type = AG) .....	198
<b>13</b>	<b>XROLLING RFQ MODALITY .....</b>	<b>199</b>
13.1	Introduction .....	199
13.2	Description .....	199
13.2.1	Standard xRolling RFQ transactions .....	199
13.2.2	State of RFQ conversations .....	201

13.2.3	Compatibility with order messages for xRolling Requesting Party .....	201
13.3	Message list .....	202
13.4	Message flow .....	203
13.5	Annotations and adaptations of FIX 5.0.....	206
13.6	Message definition .....	207
13.6.1	Quote Request for xRolling (Msg Type = R) .....	207
13.6.2	Quote Response to notify status of xRolling RFQ (Msg Type = AJ) .....	209
13.6.3	Quote Response about xRolling conversation sent by Liquidity Provider (Msg Type = AJ).....	213
13.6.4	Quote Response to cancel xRolling by initiator (Msg Type = AJ) .....	215
13.6.5	Execution Report sent by the Liquidity Provider to notify order status in the Stock Exchange (Msg Type = 8).....	216
13.6.6	Execution Ack for the Liquidity Provider (Msg Type = BN) .....	218
13.6.7	Execution Ack for the xRolling Requesting Party .....	221
13.6.8	Execution Report to notify executions in the xRolling RFQ trading mode (Msg Type=8) .....	224
13.6.9	Quote Request reject to answer a Quote Request (Msg Type = AG).....	225
13.7	Management of maximum position limit parameters set by LP .....	226
13.7.1	Message list.....	226
13.7.2	Message flow .....	226
13.7.3	Annotations and adaptations of FIX 5.0 .....	227
13.7.4	Registration Instructions (Msg Type = o) for maximum position LP-Requesting Party.....	228
13.7.5	Registration Instructions Response (Msg Type = p) for maximum position LP-Requesting Party.....	230
13.7.6	Registration Instructions Response (Msg Type = p) to answer a query about current consumed position .....	232
<b>14</b>	<b>COMMUNICATION OF EVENTS.....</b>	<b>235</b>
14.1	Introduction .....	235
14.2	List of messages .....	235
14.3	Message flow .....	235
14.4	Annotations and adaptations of FIX 5.0.....	236
14.5	Definition of messages .....	236
14.5.1	News (Msg Type = B) .....	236
	<b>MEFF ORDER TYPES .....</b>	<b>237</b>
	<b>USER FIELDS .....</b>	<b>238</b>



## 1 Introduction

### 1.1 Scope of this manual

This document contains the definition of the MEFF trading system interface provided by MEFF for developing external applications. The interface is based on version 5.0 of the FIX Protocol standard (Financial Information exchange). More detailed information about the standard can be found in reference document 1 (see 1.5) or on the website [www.fixprotocol.org](http://www.fixprotocol.org).

The interface follows the FIX 5.0 specifications, as far as possible. In the majority of cases the structure and semantics of the messages are identical to the standard.

In some cases, the protocol has been extended to cover functions not considered by the standard. These extensions are clearly detailed in the document.

In other cases, the standard is ambiguous or indicates that the details should be mutually defined by the parties. In these cases the manual provides a detailed description to avoid any possible ambiguity.

All annotations and adaptations of the standard have been done in accordance with the recommendations in the standard.

To avoid possible duplication in the sources of information, this document does not include explanations of those matters that comply exactly with the standard. Therefore, the standard documentation should be considered as the main source of information for any matter that is not explicitly covered in this manual.

This is a reference document for those Members and ISVs that wish to develop software that can process private data using the HF MEFFGate server FIX interface.

## 1.2 Private information

The following table displays the private functions and their related messages.

Private function	Related messages
Order management	New Order - Single
	Order Cancel Request
	Order Modification Request
	Execution Report
	Order Cancel Reject
	Order Status Request
	Order Mass Cancel Request
	Order Mass Cancel Report
Strategies definition	Security Definition Request
	Security Definition
Quote management (an order with buy + sell sides)	Quote
	Quote Status Report
	Execution Report
	Quote Cancel
Cross trades within the member, block trading and special operations	Quote Status Request
	Trade Capture Report
	Execution Report
Send messages to market supervisor and Reception of administrator's messages	News
Indications of Interest	Indication of Interest
Request for Quote	Quote Request
	Quote Request Reject
	Quote Response
Delta Protection, Kill Button, Filters Management and Permissions	Registration Instructions
	Registration Instructions Response

## 1.3 Structure of manual

The manual is divided into two parts. The first part, containing the first four chapters, gives a description of generic features of this interface.

This first chapter describes the scope of the document, its structure and introduces the related documents.

Chapter 0 "

Implementation decisions” presents those annotations or restrictions arising from the implementation of the protocol defined in this manual.

Chapter 3 “FIX Session” describes those aspects related to the session level, including the detailed description of the corresponding messages.

Chapter 4 “General conventions in application messages” describes in detail specific aspects that affect the majority of the messages described in this manual.

Given the generic nature of the content, which affects all the messages, it is recommended to read chapters 2, 3 and 4 before considering other chapters.

The second part of the manual, containing the remainder of the chapters, describes the different functions supported by HF MEFFGate. Each of these chapters deals with a specific function, describing specific matters of interest.

Each of these chapters contains the following sections:

- **Introduction.** A brief description of the function covered in the chapter
- **List of messages.** List of the different messages implemented by the function
- **Message flow.** Description of the different scenarios for message exchange that may arise, with the corresponding message flow diagrams
- **Annotations and adaptations of FIX 5.0.** Details the annotations and adaptations that MEFF has made to the standard protocol to meet its needs
- **Definition of messages.** Contains a table for each message in the chapter, describing the message fields in detail

Finally, various tables providing information referred to throughout the document are included as appendices.

### 1.4 Format of the message definition tables

As explained in the previous section, a table for each message is included in those chapters where it is necessary, describing the component fields in detail.

These tables contain one field per row and have the following columns:

Column	Meaning
Tag	Field number. The fields added to the message in this implementation have an asterisk (“*”) after the number
Name	Name of field according to the FIX standard
Req	“Y” indicates that the field is required; “N” means that the field is optional. “Y*” means that the field is required in this implementation, but it is optional in the FIX 5.0 standard
Valid values	Accepted values for the field in the context of the message. It may be a list of values, or a range of numeric values, e.g. “>=3, <= 10”. The default value for the field is also indicated in this column. To avoid confusions with the terms, the original FIX value description has been respected in the values associated with codes.

Format	Type of data in the field. It is one of the types defined by FIX, or one of these types with some additional restriction. String(n) is a String type with a maximum of n characters, or in some cases with exactly n characters. For more information on the String type, see 2.4
Description	Description of the field in the context of the message

## 1.5 Related documents

#	Title	Author
1	Financial Information Exchange Protocol (FIX) 5.0 Service Pack 2 (9 December 2013) EP98-222 enhancing FIX 5.0 SP2	FIX Committee
2	HF MEFFGate – FIX Interface Specifications M5.4	MEFF

## 2 Implementation decisions

### 2.1 Description

This chapter presents the implementation decisions made by MEFF. Those aspects that the standard leaves open and have been defined in this implementation are detailed here.

### 2.2 Fields ignored

In some cases, the content of certain fields of the entering messages may be ignored by HF MEFFGate. When this is the case, it is clearly stated in the field description.

### 2.3 Unsupported fields

The unsupported fields of a message are not included in its description.

Messages sent to HF MEFFGate should not contain unsupported fields. Messages sent by HF MEFFGate never contain unsupported fields.

No required fields have been declared unsupported.

### 2.4 Length of String type

The FIX standard does not place any restriction on the maximum length of the String type. In this implementation the maximum length is 255 characters.

In some fields, a shorter maximum length has been established. In these cases, the type is presented as String(n), where “n” is the maximum number of characters of the field. In certain cases “n” indicates the exact length of the field, in which case it will be explicitly stated in the valid values column.

### 2.5 Maximum length of message

The maximum length of the messages sent or received by HF MEFFGate is 4096 bytes.

### 2.6 Encryption

HF MEFFGate does not use the encryption defined in the FIX standard (using the SecureData and SecureDataLen fields in the message header). The encryption is implemented through the use of SSL (*Secure Socket Layer*).

### 2.7 Identification of the HF MEFFGate FIX protocol

HF MEFFGate implements an additional function that allows both parties to agree on the HF MEFFGate FIX version that they are going to use.

It is important to distinguish between the version of the FIX protocol (in this case “5.0”) and the version of the HF MEFFGate FIX protocol.

More than one version of the HF MEFFGate FIX protocol may exist for the same version of FIX.

If the version requested by the client program is not available in the HF MEFFGate server in use, it will return a Logout Message with the corresponding explanatory message.

## 3 FIX Session

### 3.1 Introduction

The level of the FIX session guarantees the complete delivery of messages between both parties, without errors. HF MEFFGate implements the majority of the functions of the session level defined in the FIX 5.0 standard

### 3.2 FIX session and communication session

There are two types of session:

- **Communication session.** It begins when opening the socket (ip-address and port assigned to this service). It ends when the socket is closed.
- **FIX session.** This begins when a request to start a session (Logon message) is accepted. It ends when the communication is completed, preferably with the exchange of Logout messages. This is a combination of two-way messages identified by a sequence of consecutive numbers. A FIX session begins when the sequence numbers of both parties are restarted with the value 1. There is no explicit way of ending a FIX session; a session ends when a new one begins.

In addition to the two mentioned types of sessions, the trading session should also be considered. A trading session in an environment begins each day when the HF MEFFGate server loads the trading system data and accepts connections for said session.

The client program must begin a new FIX session in every communication session.

Given that HF MEFFGate does not provide 24-hour support for the service, the ResetSeqNumFlag field is not required in the Logon message.

### 3.3 Identification of the FIX session

Once a communication session has been established, HF MEFFGate identifies the associated FIX session using four fields in the Logon message sent by the initiator:

- SenderCompID
- SenderSubID
- TargetCompID
- TargetSubID

SenderCompID identifies the member and SenderSubID identifies the trader. TargetCompID together with TargetSubID identify the environment.

No more than one FIX session can exist at a time with the same values for these four fields.

The SenderCompID, SenderSubID, TargetCompID and TargetSubID fields are present in all the FIX messages. All the messages belonging to the same FIX session must have the same values in these fields. If a message is received with values that do not correspond with those of the session, it will be rejected with a Reject message.

It should be noted that the values of these fields are inverted when the message is sent by HF MEFFGate, with respect to those sent by the client. Suppose that trader "001" of member "A001"

has a session established with the Financial Contract Group at MEFF. The messages will be those shown below:

Client message to HF MEFFGate:	HF MEFFGate message to client:
SenderCompID = "A001"	SenderCompID = Operating MIC
SenderSubID = "001"	SenderSubID = "M3"
TargetCompID = Operating MIC	TargetCompID = "A001"
TargetSubID = "M3" *	TargetSubID = "001"

---

The list of values for TargetCompID/SenderCompID is located in codification table 2.

The list of values for TargetSubID/SenderSubID is located in codification table 1.

### 3.4 Client software and FIX sessions

A HF MEFFGate client is a software development that connects to MEFF through a HF MEFFGate server.

As noted in 3.3, a FIX session is limited to one user and one contract group. A client will be able to establish various FIX sessions simultaneously to access more than one contract group or trade in one contract group with various user codes.

A HF MEFFGate server can provide service to various sessions simultaneously, be they of the same client or various clients.

When a FIX client tries to connect with a contract group that is not available, his Logon message is answered with a Logout message with the appropriate explanation.

### 3.5 Message routing from different users through an unique FIX session (multilogon connection)

HF MEFFGate allows to establish, through an unique FIX session, a message routing from different traders who have the appropriate privileges. This is a multilogon connection.

For this purpose, the following MIC tags from the Standard Message Header are used in application messages: OnBehalfOfCompID [115], OnBehalfOfSubID [116], DeliverToCompID [128] and DeliverToSubID [129].

It should be noted that the tags OnBehalfOfCompID [115] and OnBehalfOfSubID [116] are used when the client application sends application messages to HF MEFFGate. Tags DeliverToCompID [128] and DeliverToSubID [129] are used when HF MEFFGate sends application messages to the client application.

Application message to HF MEFFGate:	Application message to client:
OnBehalfOfCompID = "B001"	DeliverToCompID = "B001"
OnBehalfOfSubID = "351"	DeliverToSubID = "351"

---

### 3.6 Start of the FIX session

On initiating a new communication session (opening a new socket), the client must initiate a new FIX session. The value to be used in the MsgSeqNum field of the Logon message must be 1.

---

\* See table 1 of document "Codification Tables" for a list of available Contract Groups



### 3.7 Synchronisation at application level

When a client starts a FIX session (Logon message accepted), it receives a series of information related with the current Market session.

To synchronise at the application level, the client may use the tags ApplID [1180] + ApplSeqNum [1181]. Value 0 in ApplID [1180] and ApplSeqNum [1181] means updates from the beginning of the business session. If this field is not specified, then the classical behaviour is assumed (snapshot of the current situation and updates from this time).

It should be taken into account that any subscription to information is cancelled when the communication session ends. If this service is required when reconnecting to a new session, it must be requested again.

The series of private messages not associated to subscriptions referred to in this section correspond to the following messages:

- Execution Report with the ExecType [150] values of New ("0"), Replace ("5"), Cancelled ("4"), Trade ("F") and Trade Cancel ("H")
- News
- Quote Status Report corresponding to the current situation of each quote
- Trade Capture Report (from all the traders of the member)
- Quote Response
- Registration Instructions Response (delta protection, user's established permissions, volum filters and price filters and when the user has the relevant permissions, those of the other traders of the entity and of the members cleared by the entity, ...)

### 3.8 High availability

To improve the availability of access to MEFF there will be various instances of the HF MEFFGate server executing in different computers.

All the instances of HF MEFFGate will be connected with the central systems of MEFF. Therefore, they will have all the necessary information.

When a HF MEFFGate server fails, the client can continue working with another HF MEFFGate. The client must carry out the necessary processes to synchronise at the application level using the tags ApplID [1180] + ApplSeqNum [1181].

When a client application that has established a FIX session fails, the client application can restart in another computer that continues with the same session (using the same HF MEFFGate server).

In this case, HF MEFFGate will not request the client application resending any unprocessed messages.

### 3.9 Reception of information for all traders of the member

Members can request the configuration of privileged traders that will receive the order related messages sent to all the traders of the member.

The messages affected by this mechanism are the Execution Report which contains the following values in the ExecType [150] field: New ("0"), Cancelled ("4"), Replace ("5"), Trade ("F"), Trade Cancel ("H") and the Quote Status Report.

The messages sent by HF MEFFGate to this user contain the same information as the original messages, except for the TargetCompID and TargetCompSubID fields. When necessary, the information contained in the Parties block allows identification of the target trader in the original message.

### 3.10 Reception of information on actions taken on behalf of the trader

MEFF's technological platform enables actions to be taken on behalf of a trader. This can be done, for instance, from a Multi-Trader station of the member or by the MEFF Market Surveillance.

In these cases, the FIX client on whose behalf the action has been made, receives the messages corresponding to said operative. Accordingly, **client applications must be prepared to receive messages originated by actions of third parties in their name.**


Note that in this case, the number of messages received by the client application can be less than it would have received if it had sent the equivalent message. The messages that are not received are those generated directly from HF MEFFGate to notify the reception of the message and sending the same message to the central systems.

When necessary, the information contained in the Parties block (see 0) allows the member and trader who undertook the action to be identified.

### 3.11 Message flow

#### Start of communication session and start of FIX session


A request to start a communication session (Logon message) that is accepted is replied to by the receiver with another Logon message. The initiator must not send another message until it has received this confirmation of acceptance.

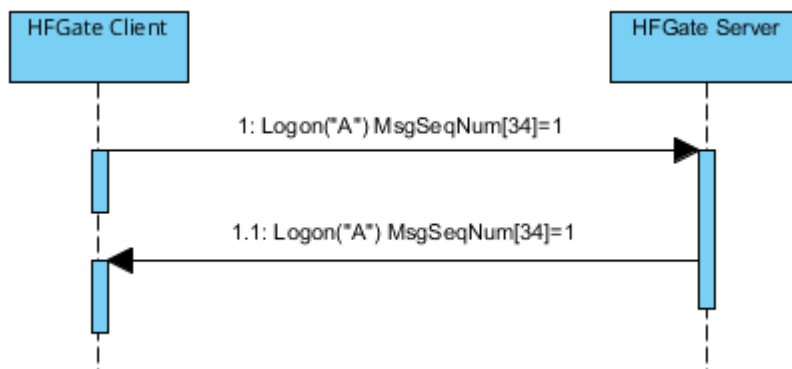

#### Start of communication session rejected


When the start of a communication session (Logon message) is not accepted, HF MEFFGate will reply with a Logout message.

For more details on the behaviour of sequence numbers of both parties see section 3.6.

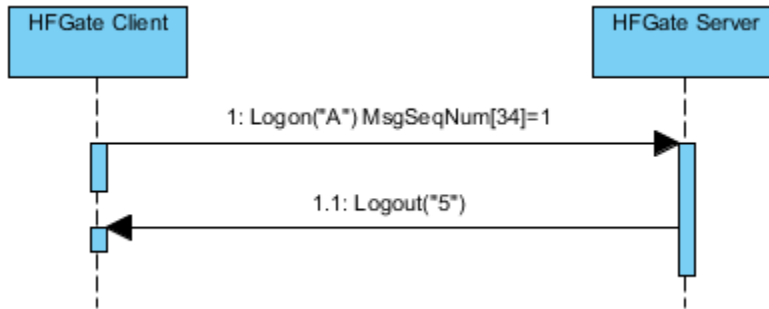


**End of a communication session started by the sender**

The client can end the communication session by sending a Logout message at any time.

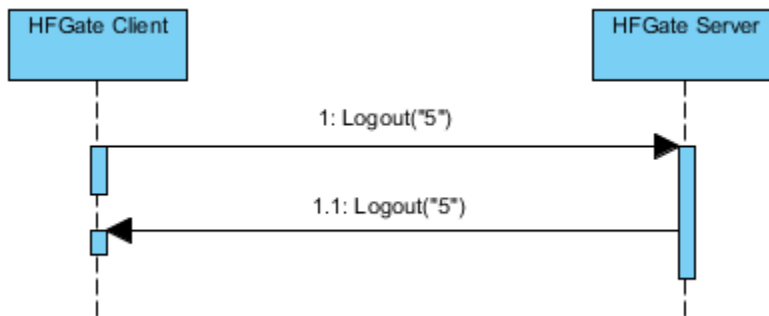

**Sending messages with identification fields of session (SenderCompID, SenderSubID, TargetCompID and TargetSubID) with different values from those associated to the current FIX session**

All the messages associated to a FIX session must include the same identifying values of the session (SenderCompID, SenderSubID, TargetCompID and TargetSubID). If a message differs from the values indicated in the Logon of the session, it is rejected with a Reject message.

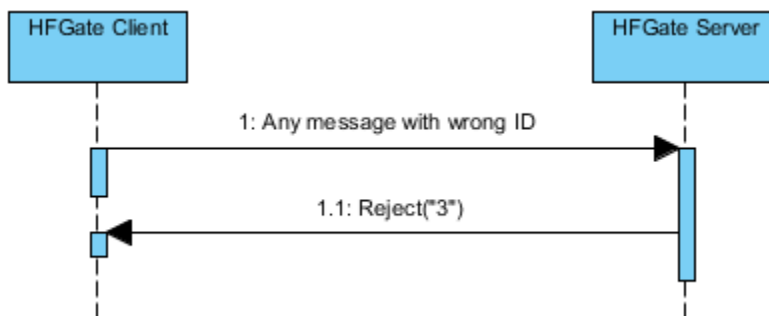

**3.12 Annotations and adaptations of FIX 5.0**

The user optional field ReceivePendings [5678] has been added to the Logon message to Indicate whether the receipt of Execution Reports pending confirmation is required or not

The user optional field LocalMktTimestamp [21501] has been added to the Logon message to Indicate for all tags in which a timestamp is included, the timestamp format (UTC format or local market time)

The user optional field AutoSubscriptionsID [21502] has been added to the Logon message to Indicate an implied subscription to Trading Session Status Request Security List Request and Market Data Request

The user optional field ExecutionsOnly [21503] has been added to the Logon message to Indicate the user wants to receive trades only

The user field MaxMsgPerSecond [21504] has been added to the Logon message sent by HF MEFFGate to indicate the maximum number of messages per second that can be sent, as contracted for the client

The user field BusinessSessionDate [21505] has been added to the Logon message sent by HF MEFFGate to inform the current business session date.

The optional fields ApplID [1180] and ApplSeqNum [1181] have been added to the Logon message to indicate that only updates from the point indicated are requested

The Text [58] and DefaultCstmApplVerID [1408] fields in the Logon message are now required

When a request to start a session (Logon message) is rejected, the receiver (MEFF) will always send a Logout message in reply

The SenderSubID [50] and TargetSubID [57] fields in the header of messages (Standard Message Header) are now required

The FIX method of encryption is not supported

The Resend Request and Sequence Reset messages are not supported (and rejected by HF MEFFGate)

The only valid value of the ResetSeqNumFlag [141] field in the Logon message is "N"

## 3.13 Definition of messages

### 3.13.1 Standard Message Header

Header is present in all FIX messages.

Tag	Name	Req	Valid values	Format	Description
8	BeginString	Y	FIXT.1.1	String	Indicates the start of a new message. It is always the first field of the message
9	BodyLength	Y		Int	Length of message in bytes, from the end of this field up to and including the delimiter before the Checksum field. It is always the second field of the message
35	MsgType	Y	All message types supported by MEFF	String	Identifies the type of message. It is always the third field of the message
					Identifier of the entity that sends the message.
49	SenderCompID	Y	See chapter "3.3 - Identification of the FIX session"	String	It contains the operating MIC of the venue (see table 2 document "Codification tables") when the message is sent by HF MEFFGate.  It must contain the member code in the messages sent by the client application.
					Identifier of the entity that the message is sent to.
56	TargetCompID	Y	See chapter "3.3 - Identification of the FIX session"	String	It should contain the operating MIC of the venue (see table 2 document "Codification tables") when the message is sent to HF MEFFGate, although HF MEFFGate ignores the content of this field.  It contains the member code in the messages sent by HF MEFFGate.
115	OnBehalfOfCompID	N		String	Used by client when sending messages via a third party who has the appropriate privileges
128	DeliverToCompID	N		String	Used by HF MEFFGate when receiving messages via a third party who has the appropriate privileges
34	MsgSeqNum	Y		SeqNum	Sequence number of the message within the current FIX session
50	SenderSubID	Y*	See chapter "3.3 - Identification of the FIX session"	String	The messages sent from HF MEFFGate to the client contain the code assigned to the contract group with which the connection

Tag	Name	Req	Valid values	Format	Description
					was established (see table 1 document "Codification tables").
					Messages sent to HF MEFFGate must contain the trader code with which the FIX session was started
					The messages sent from HF MEFFGate contain the code of the trader which it is to be sent to.
57	TargetSubID	Y*	See chapter "3.3 - Identification of the FIX session"	String	Messages sent to HF MEFFGate must contain the code of the contract group with which the connection was established (see table 1 document "Codification tables")
116	OnBehalfOfSubID	N		String	Used by client when sending messages via a third party who has the appropriate privileges
129	DeliverToSubID	N		String	Used by HF MEFFGate when receiving messages via a third party who has the appropriate privileges
52	SendingTime	Y		UTC Timestamp	Time message sent

### 3.14 List of messages

The functionality at the session level is implemented in FIX 5.0 using five administrative messages. All these are fully supported by the HF MEFFGate FIX protocol.

Message	Description
Logon (Msg Type = A)	Request or confirmation of the start of a communication session
Logout (Msg Type = 5)	Request or confirmation of the end of a communication session
Heartbeat (Msg Type = 0)	Periodic notification that the connection continues to be live
Test Request (Msg Type = 1)	Request to send a Heartbeat message to confirm that the connection is alive
Reject (Msg Type = 3)	Reject a message at session level

### 3.14.1 Standard Message Trailer

Present in all FIX messages.

Tag	Name	Req	Valid values	Format	Description
10	Checksum	Y		String(3)	Checksum of the message, calculated in accordance with the standard. It is always the last field of the message and its length is exactly 3 bytes

---



### 3.14.2 Logon (Msg Type = A)

The Logon message is used to start a session by the client application and to accept it by the HF MEFFGate.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = A		
98	EncryptMethod	Y	0 = None	Int	Ignored by HF MEFFGate
108	HeartBtInt	Y	>=1	Int	Interval at which messages are sent to verify the connection (Heartbeat message) expressed in seconds.
141	ResetSeqNumFlag	N	N	Boolean	Only allows the value "N", as it is not required in the implementation of the protocol
789	NextExpectedMsgSeqNum	N		SeqNum	If informed only value 1 is allowed
464	TestMessageIndicator	N	Y = Test N = Production	Boolean	Indicates whether it is a test or production session. The client can use it optionally to indicate if it wants to connect to the production or test environment. The start of a session is accepted only if this environment is valid for the HF MEFFGate If the client does not indicate anything, this parameter is not taken into account. In any event HF MEFFGate always informs this field
553	Username	N		String	Identifier of the user assigned by MEFF. Required when the message is sent by the client application. It is currently comprised of the combination of the member code and the trader code assigned by MEFF
554	Password	N		String	User Password. Required when the message is sent by the client application
1137	DefaultAppVerID	Y	9	String	Value 9 refers to FIX50SP2
1408	DefaultCstmAppVerID	Y*		String	Exact identification of the version of the protocol used and expected by the client application
58	Text	Y*		String	The client must include a descriptive string of the software name used by the FIX connection. This will be one that has passed the corresponding conformance test
1180*	AppID	N		String	If provided, only updates from the point indicated will be sent. This value, used in conjunction with ApplSeqNum [1181], should match the same field in any of the messages provided by the HF MEFFGate such as: Execution Report, Quote Status Report, Trade Capture Report ...

Tag	Name	Req	Valid values	Format	Description
1181*	ApplSeqNum	N		SeqNum	Required if ApplID [1180] is specified.  This value, used in conjunction with ApplID [1180], should match the same field in any of the messages provided by the HF MEFFGate such as: Execution Report, Quote Status Report, Trade Capture Report ...
5678*	ReceivePendings	N	Y, N (default)	Boolean	Indicates that the receipt of Execution Reports pending confirmation is required or not. Possible values are:  Y - All messages are sent  N (default) - HF MEFFGate will not send Execution Report messages with OrdStatus [39] = A (Pending New), E (Pending Replace) or 6 (Pending Cancel) and QuoteStatus [297] = 10 (Pending)
21501*	LocalMktTimestamp	N	Y, N (default)	String	Indicates, for all tags in which a timestamp is included, the timestamp format:  Y - HF MEFFGate will send the local market time (all messages up to microseconds)  N - HF MEFFGate will send the time in UTC format according to the FIX standard (all messages up to microseconds)  For more information see 4.6 Subscriptions identifier.
21502*	AutoSubscriptionsID	N		String(10)	If this tag is informed, a subscription to Trading Session Status Request Security List Request, Market Data Request (+Indication of Interest) is implied.  Otherwise the classical behaviour is assumed.  For more information see "4.7 - Implied subscription to Trading Session Status Request, Security List Request and Market Data Request"
21503*	ExecutionsOnly	N	Y, N (default)	Boolean	Indicates the user wants to receive trades only. Possible values are:  Y - Only Execution Report messages with ExecType [150] = F (Trade) are

Tag	Name	Req	Valid values	Format	Description
					received. Also Quote Status Report messages will never be received
					N (default) - Classical behaviour
					Maximum number of messages per second that can be sent, as contracted for the client.
21504 *	MaxMsgPerSecond	N		Int	If the number of messages sent by the client application per second exceeds the number indicated, the client application could experience delays in processing the messages.
					This tag is only informed in the Logon response message sent by HF MEFFGate. The client application should not send this tag in the Logon message sent to HF MEFFGate.
					Current business session date.
21505 *	BusinessSessionDate	N		LocalMkt Date	This tag is only informed in the Logon response message sent by HF MEFFGate. The client application should not send this tag in the Logon message sent to HF MEFFGate.
	Standard Trailer	Y			

### 3.14.3 Logout (Msg Type = 5)

The Logout message is used by both parties to request the end of a communication session and to accept said request.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 5		
58	Text	N		String	Explanatory text
	Standard Trailer	Y			

### 3.14.4 Heartbeat (Msg Type = 0)

The Heartbeat message is used by both parties to indicate that the connection is active.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 0		
112	TestReqID	N		String	If the message is the reply to a Test Request message, it must contain the same value as the original TestReqID field. Otherwise, this field should be omitted.
	Standard Trailer	Y			

### 3.14.5 Test Request (Msg Type = 1)

The Test Request message is used by both parties to request that a Heartbeat message be sent.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 1		
112	TestReqID	Y		String	Identifier of the request. It must be included in the Heartbeat message reply
	Standard Trailer	Y			

### 3.14.6 Reject (Msg Type = 3)

The Reject message is used by HF MEFFGate to reject a message that does not comply with the FIX protocol specified by MEFF.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 3		
45	RefSeqNum	Y		SeqNum	Sequence number of the rejected message
			0 = Invalid tag number 1 = Required tag missing 2 = Tag not defined for this message type 3 = Undefined Tag 4 = Tag specified without a value 5 = Value is incorrect (out of range) for this tag 6 = Incorrect data format for value 9 = CompID problem 11 = Invalid MsgType 13 = Tag appears more than once 14 = Tag specified out of required order 15 = Repeating group fields out of order 16 = Incorrect NumInGroup count for repeating group 17 = Non "data" value includes field delimiter (SOH character) 99 = Other		
373	SessionRejectReason	N		Int	Code indicating the rejection motive
58	Text	N		String	Contains a more detailed explanation of the reason for the rejection
	Standard Trailer	Y			

## 4 General conventions in application messages

### 4.1 Order identification

#### 4.1.1 CIOrdID

Any message related to an order (entry, cancellation, modification) sent by the client, must have a unique identifier in the CIOrdID field. The MEFF system enforces uniqueness of this identifier during the trading session, for the alive orders, at the contract level .

Once the message is accepted by HF MEFFGate, the client receives the corresponding confirmation message with the same CIOrdID code preceded by a prefix. It becomes the identifier of the order from this moment on. The client can now identify the order using either of the two CIOrdID values. MEFF implements this mechanism to ensure the unique identification of orders, independently of their issuer.

The only exception to the above occurs in the case of order cancellation *en masse*, where all the orders cancelled by this procedure are identified by the same CIOrdID. More information on this is provided in section 7.6.4.

The CIOrdID field assigned by the client must be 10 characters long or less. HF MEFFGate also accepts that messages sent by the client use a CIOrdID with a length of 30 characters, but in this case only the last 10 positions can be fixed freely, as the first 20 must coincide with the format that is shown below.

The CIOrdID assigned by the client is in the format **YYMMDDmmmmTttOoooSssNnnnnnnnnn**, where the coding is defined as follows:

- **YYMMDD**. The date of the trading session when the new order, order modification or order cancellation is issued
- **MmmmTtt**. Contains the member and trader codes of the SenderCompID and SenderSubID fields from the heading of the original message
- **OoooSss**. Contains the member and trader codes that are indicated in the Parties block as Originating Firm and Originating Trader (see 0)
- **Nnnnnnnnnn**. The value assigned by the client to the CIOrdID in the original message

#### 4.1.2 OrderID

The OrderID field is the order identifier assigned by the HF MEFFGate server.

This identifier is unique per contract group, member, trader and session date

It is maintained associated with the order, even after order modification.

For orders with GTD validity (in the Segment MIC where these orders are admitted), it is reset in each session; in this case, the corresponding Execution Report messages will be informed with ExecType [150] = D (Restated) and ExecRestatementReason [378] = 1 (Renewal / Restatement).

#### 4.1.3 SecondaryOrderID

The SecondaryOrderID field is an order identifier assigned by the central trading system. The period in which the uniqueness of this field is guaranteed is determined by each central trading host.



#### 4.1.4 SecondaryExecID

The field SecondaryExecID [527] informs the number of reported history of the order. Each time the status or the order is changed in the order book of the central system (modification, cancellation, trade) a new value is assigned to this field.

In the MEFF trading system, any state of a specific order can be identified by the combination of the fields SecondaryOrderID [198] + SecondaryExecID [527].

### 4.2 Trade identification

#### 4.2.1 ExecID

The ExecID field is **not** an identifier of trades. It is an Execution Report message identifier.

#### 4.2.2 TrdMatchID

The TrdMatchID field has the trade register number. This is the code assigned by the central trading system to the trade or the cross trade referred to in the message. The period in which the uniqueness of this field is guaranteed is determined by each central trading host.

## 4.3 Parties block

The Parties block (or the NestedParties block) is used in many application messages to specify the parties involved in the transaction.

In the detailed definition of the messages that this block contains, the block is incorporated exactly as shown below. The list of possible values is restricted by the specific characteristics of the message.

Tag	Name	Req	Valid values	Format	Description
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	See section 4.3 - Parties block
→ 447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier	Char	Indicates the codification used in the PartyID field. MEFF's own codification is always used  Required if the block is present  Value "P" when PartyRole [452] = 3, 12 or 122 Value "D" for the rest
→ 452	PartyRole	N		Int	Indicates the role taken by the party indicated in the PartyID field
	End <Parties>				

Various roles are used in the messages contained in this manual. The interpretation of the PartyID field depends on the value of the PartyRole, as explained below:

### – 1 (Executing Firm)

- **Send.** This value cannot be specified when sending messages
- **Receive.** When this value is specified, the PartyID field corresponds with the member code for the trader that sent the original message (acting in his own name or on behalf of another trader)

### – 3 (Client ID)

When this value is specified, the PartyID field corresponds to the Short code Client identification

The following values are reserved and have a special meaning: 0 (No Client), 1 (AGGR), 2 (PNAL). See document "Guidelines. Transaction reporting, order record keeping and clock synchronization under MiFID II" published by ESMA on 10 October 2016

### – 4 (Authenticating Firm)

When this value is specified, the PartyID field corresponds to the Short code to identify the Authenticating Firm (cash market cross trades request)

### – 7 (Entering Firm)

- **Send.** When this value is specified, the PartyID field corresponds to the code of the member that acts as broker or intermediary in a cross trade or in an specific configuration of price and volume filters and delta protection. The use of this value are only allowed in the Trade Capture Report message and the Registration Instructions message, used to enter the trade code which acts an specific configuration of price and volume filters and delta protection. It only allows the member’s own code to be specified.
- **Receive.** When this value is specified, the PartyID field corresponds to the code of the member that acts as broker or intermediary in a cross trade or in an specific configuration of price and volume filters and delta protection.
- **11 (Order Origination Trader)**
  - **Send.** In general it is not necessary to use this field when sending messages. When this value is specified, the PartyID field corresponds with the code of the trader on whose behalf it is acting. In the Trade Capture Report message, used to enter cross trades, the trader associated to the legs of the cross trade can be indicated. Also the Registration Instructions message is used to enter the trade code which acts an specific configuration of price and volume filters and delta protection.
  - **Receive.** When this value is specified, the PartyID field corresponds with the trader code of the trading being handled
- **12 (Execution within Firm)**

When this value is specified, the PartyID field corresponds to the party for the Execution within Firm

The following value is reserved and has a special meaning: 3 (NORE). See document “Guidelines. Transaction reporting, order record keeping and clock synchronization under MiFID II” published by ESMA on 10 October 2016
- **13 (Order Origination Firm)**
  - **Send.** In general it is not necessary to use this field when sending messages. When this value is specified, the PartyID field corresponds with the code of the trading member on whose behalf it is acting. In Trade Capture Report message, used to enter cross trades, the buyer or seller firm can be indicated when this is different to the one who introduces the message. Also the Registration Instructions message is used to enter the trade code which acts an specific configuration of price and volume filters and delta protection
  - **Receive.** When this value is specified, the PartyID field corresponds with the member code of the trading being handled
- **17 (Contra Firm)**

In a Request for Quote conversation, this PartyID refers to the Member or Broker with whom the conversation is held.

– **35 (Liquidity Provider)**

In xRolling RFQ this PartyID refers to the Liquidity Provider code.

– **36 (Entering Trader).**

- **Send.** When this value is specified, the PartyID field corresponds with the code of the trader that acts as broker or intermediary in a cross trade or in an specific configuration of price and volume filters and delta protection. The use of this value are only allowed in the Trade Capture Report message and the Registration Instructions message, used to enter the trade code which acts an specific configuration of price and volume filters and delta protection. Only allows the trader's own code to be specified.
- **Receive.** When this value is specified, the PartyID field corresponds to the code of the member that acts as broker or intermediary in a cross trade or in an specific configuration of price and volume filters and delta protection.

– **37 (Contra Trader)**

In a Request for Quote conversation, this PartyID refers to the Trader at the Member or Broker with whom the conversation is held.

– **43 (Internal Carry Account)**

This PartyID refers to the ClientDataID field used in the binary protocol messages instead of using the Account, the MiFID identifiers and other typically constant fields for a specific user. The equivalences can be found in the Registration Instructions Response message type CLIENTDATAID.

– **59 (Executing Trader)**

- **Send.** This value cannot be specified when sending messages
- **Receive.** When this value is specified, the PartyID field corresponds with the code of the trader that sent the original message (acting in his own name or on behalf of another trader)

– **60 (Introducing Broker)**

In xRolling RFQ, this PartyID refers to the xRolling Requesting Party member code.

– **96 (Take-up Trading Firm)**


When this value is specified, the PartyID field corresponds to the Take-up Trading Firm.

– **122 (Investment Decision within Firm)**


When this value is specified, the PartyID field corresponds to the Short code to identify the party for the Investment Decision within Firm

The following value is reserved and has a special meaning: 0 (No decision within Firm). See document “Guidelines. Transaction reporting, order record keeping and clock synchronization under MiFID II” published by ESMA on 10 October 2016

The following flow diagram provides an example of the use of party blocks in an intervention made by the MEFF Market Surveillance on an order by trader 301 of member AAAA. In this example trader 305 is considered to be configured as a privileged trader and therefore will also receive the information on the trade of trader 301 (see 3.9 for more information on privileged traders).

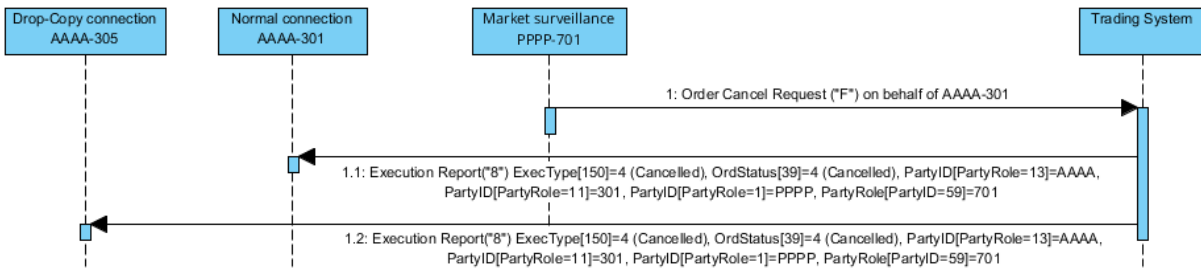

The next flow diagram provides an example of the use of party blocks in the entry of a cross trade by the MEFF Market Surveillance. In the example, expit trade trader 310 of member BBBB acts as intermediary and as one of the parties, whilst trader 301 of member AAAA acts as the other party. In this example trader 305 of member AAAA is configured as privileged trader and therefore also receives information on the trading activity of trader 301 of the same member (see 3.9 for more information on privileged traders).

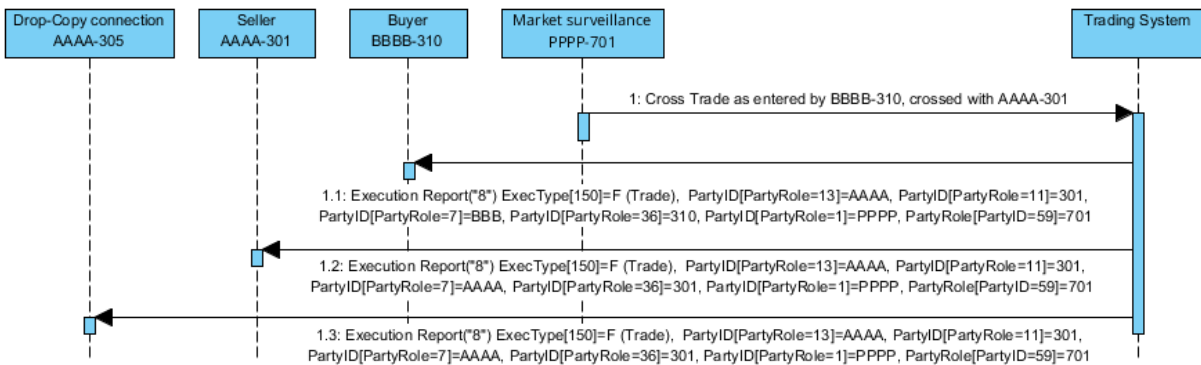

#### 4.4 Instrument block

In mass cancel requests, such as Order Mass Cancel Request or Quote Cancel, the FIX client may specify selection criteria for the securities. In these cases, the cancellation will apply to the securities that meet these criteria. The possible selection criteria include fields of the Instrument block.

The table below indicates which fields are accepted by MEFF and the type of request that can be made.

Field	Meaning
SecurityType [167]	Product type
SecurityID [48]	MEFF Underlying asset
MaturityMonthYear [200]	Contract expiration
Symbol [55]	MEFF Contract code

The use of these fields is explained in detail in the following sub-sections.

#### 4.4.1 SecurityType [167]

This code identifies the product type (see table 6 in document “Codification Tables”). Only messages sent by HF MEFFGate. Not allowed in messages sent by FIX client.

#### 4.4.2 Underlying asset (SecurityID [48] field)

This code identifies the underlying asset of a contract (see table 7 in document “Codification Tables”).

#### 4.4.3 Expiration (MaturityMonthYear [200] field)

For contracts with standard maturities, indicates the month and year when the contract expires. In this case, the format for this field is YYYYMM (e.g. 201312)

For contracts with non-standard maturities, indicates the date when the contract expires. In this case, the format for this field is YYYYMMDD (e.g. 20131219)

For contracts with week standard maturities, the format for this field is YYYYMMwW (e.g. 201312w2).

#### 4.4.4 Contract code (Symbol [55] field) or other alternatives

This is the most selective of the criteria, as it refers to a specific contract. MEFFGate allows a code 22 characters long. If you want to use the other selection criteria and do not want to specify a particular contract, complete this field with the value “[N/A]”, as indicated in the FIX standard specifications.

To identify a non-standard (flexible) contract that doesn’t exist in the system, tag FlexibleIndicator [1244] and also the following combination should be used in the cross trade functionality: SecurityType [167] + PutOrCall [201] + SettlMethod [1193] + ExerciseStyle [1194] + EventText [868] when EventType [865] = 134 + SecurityID [48] + MaturityDate [541] + ContractMultiplier [231] + StrikePrice [202], with Symbol [55] = [N/A]. In this case, where appropriate, MEFFGate FIX will assign a new code following the existing rules and will populate these fields in all the messages associated (Trade Capture Report and Trade Capture Report Ack). For all other situations the contract is identified as usual, using the tag Symbol [55].

#### 4.4.5 Combination of selection criteria

When various selection criteria are combined, only those contracts that meet all the requirements are selected. When a selection criteria is not specified it is understood that this criteria is to be ignored and no contract will be discarded for this reason.

The following table shows some examples for the Financial Contract Group at MEFF.

SecurityType [167]	SecurityID [48]	MaturityMonthYear [200]	Symbol [55]	Meaning
F	FIE	(omitted)	[N/A]	All futures on IBEX index
F	BBVA	(omitted)	[N/A]	All the BBVA futures contracts with physical delivery
(omitted)	FIE	201203	[N/A]	All the contracts with IBEX index as underlying, with March 2012 expiration
O	(omitted)	201206	[N/A]	All options with June 2012 expiration

SecurityType [167]	SecurityID [48]	MaturityMonthYear [200]	Symbol [55]	Meaning
R	TEF	(omitted)	[N/A]	All time-spread contracts where Telefonica stocks is underlying of at least one leg
(omitted)	(omitted)	(omitted)	<specific contract>	The contract specified
(Omitted)	(Omitted)	(omitted)	[N/A]	All contracts
X	(any)	(any)	(any)	Wrong selection criteria

#### 4.5 MultipleCharValue and SeqNum data types

According to the FIX standard, the data type MultipleCharValue is a string field containing one or more space delimited single character values (e.g. "18 = C o").

SeqNum data type is an int field and value must be positive. The client application must be ready to receive values greater than  $2^{31}$ .

#### 4.6 Timestamp format

The system permits the user to define, for all tags in which a timestamp is included, whether the format is UTC (according to the FIX standard), or the local market time.

For this functionality the user defined tag LocalMktTimestamp [21501] is used in the Logon message.

When this tag is used, with LocalMktTimestamp [21501] = "Y", HF MEFFGate will send the local market time (all messages up to microseconds).

If this tag is not used (or LocalMktTimestamp [21501] = "N"), HF MEFFGate will send the time in UTC format (all messages up to microseconds).

#### 4.7 Implied subscription to Trading Session Status Request, Security List Request and Market Data Request

The system permits the user to establish an implied subscription to Trading Session Status Request, Security List Request, Market Data Snapshot Full Refresh and Indication of Interest. For this functionality the user defined tag AutoSubscriptionsID [21502] is used in the Logon message.

When this tag is used, i.e. when AutoSubscriptionsID [21502] is informed, HF MEFFGate will send Trading Session Status, Security List, Security Status and Market Data Snapshot Full Refresh when the Logon handshaking has been met, if tags ApplID [1180] and ApplSeqNum [1181] are not informed.

It should be taken into account that the information provided in the Market Data Snapshot Full Refresh message, for every security, for: the Opening Price, Settlement Price, Trading session high price, Trading session low price, Trading session VWAP price, Trade volume (total volume for contract in session), and Prior settlement price. In other words, it is as if we were a subscription to Market Data Request restricted to MDEntryType = 4 (Opening Price), 6 (Settlement Price), 7 (Trading Session High Price), 8 (Trading Session Low Price), 9 (Trading Session VWAP Price), B (Trade Volume) and M (Prior Settlement Price).

In case of synchronisation using tags ApplID [1180] y ApplSeqNum [1181], the client application will receive updates from the point indicated for Trading Session Status, Security List Update Report and Security Status messages.

The identifiers TradSesReqID [335] (Trading Session Status), SecurityReqID [320] (Security List and Security List Update Report), SecurityStatusReq [324] (Security Status) and MDReqID [262] (Market Data Snapshot Full Refresh) will have the value informed in AutoSubscriptionsID [21502].

If this tag is not used, HF MEFFGate will assume the classical behaviour.



## 5 Common Application Messages

### 5.1 Introduction

This chapter presents some common messages at the application level that cover three functions: the control of the communication status, the individual user password change and the rejection of messages by HF MEFFGate.

### 5.2 Network communication status

HF MEFFGate includes a mechanism to inform the client application of the status of communication between HF MEFFGate itself and the central system. This functionality is achieved using the FIX Network Status messages.

HF MEFFGate will always send Network Counterparty System Response messages reporting on status of connection between HF MEFFGate and the central systems (whether or not the client subscribed to it).

The information supplied with these messages only refers to the connection between the equipment and should not be confused with the status of the trading session, which is covered in 6.2.

To find out when the FIX connection is online and therefore able to know the response messages by the central systems, we must analyze the tag StatusValue [928], Network Counterparty System Status Response ("BD") message, to be equal 1 (Connected). At the beginning of the connection this value is 4 (In Process) and remains at this value until the HF MEFFGate has processed all initialization messages, at which time its value is 1 (Connected). State 2 (Not connected - down expected up) usually corresponds to a communication breakdown in some point between HF MEFFGate and host. Finally, state 3 (Not connected - expected down down) usually corresponds to that has been closed communication with the central systems due to a normal end of session.

### 5.3 Password change

This functionality allows to change the individual user password used in the connection between the client application and HF MEFFGate.

The new password is valid for all the next future communication sessions between the client application and HF MEFFGate.

### 5.4 Rejection of application messages

When HF MEFFGate receives a supported message with correct syntax in an unsupported situation, but there is no specific rejection message, the Business Message Reject is used. In particular, this is used to reject the Network Counterparty System Status Request message.


### 5.5 List of messages

Message	Description
Network Counterparty System Status Request (Msg Type = BC)	Request of connection status between HF MEFFGate and the central systems
Network Counterparty System Status Response (Msg Type = BD)	Report on status of connection between HF MEFFGate and the central systems
User Request (Msg Type = BE)	Individual user password change request


Message	Description
User Response (Msg Type = BF)	Reply to a User Request message
Business Message Reject (MsgType = j)	Rejection of message at application level (used when there is no specific message)

## 5.6 Message flow


### Subscription to connection status

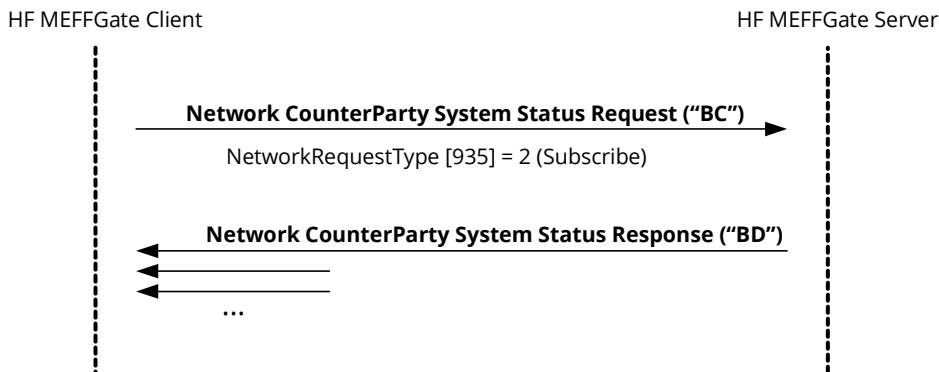

### Report on connection status without any subscription

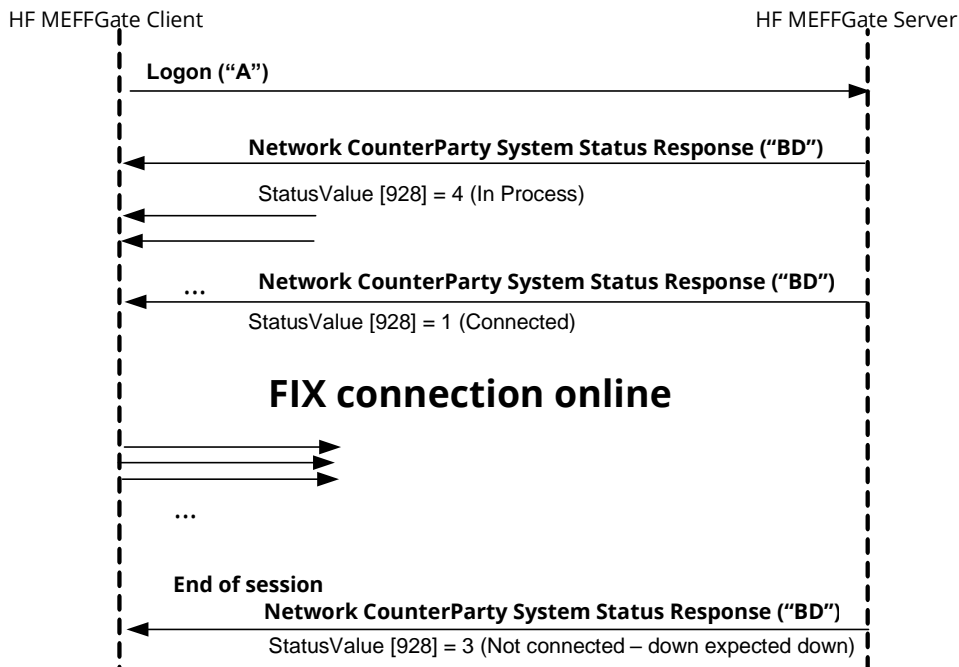

### Individual password change

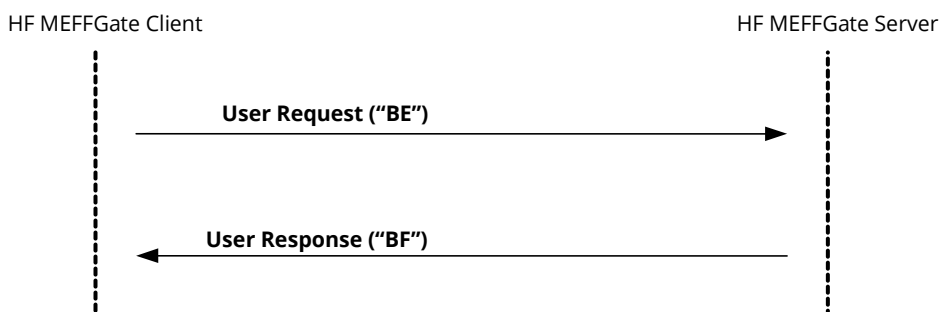

## 5.7 Annotations and adaptations of FIX 5.0

In the User Request message, the Password [554] and NewPassword [925] fields are now required.

## 5.8 Definition of messages

### 5.8.1 Network Counterparty System Status Request (Msg Type = BC)

Message sent by the client application to request information on the status of the connection between HF MEFFGate and the MEFF central systems.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = BC		
935	NetworkRequestType	Y	2 = Subscribe	Int	
933	NetworkRequestID	Y		String(10 )	Message identifier
	Standard Trailer	Y			

## 5.8.2 Network Counterparty System Status Response (Msg Type = BD)

Message sent by HF MEFFGate as reply to a Network Counterparty System Status Request Message.

It has information about the connectivity between HF MEFFGate and the MEFF central systems.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = BD		
937	NetworkStatusResponseType	Y	1 = Full	Int	
933	NetworkRequestID	Y		String	Message identifier Network Counterparty System Status Request to which it is being responded
932	NetworkResponseID	Y		String	Unique message identifier
936	NoCompIDs	Y	1	NumInGroup	
→930	RefCompID	N		String	Contains the same value as the SenderCompID field in the header (see 3.3) This field is always included in the message
→931	RefSubID	N	See table 1 of document "Codification Tables"	String	Contains the same value as the SenderSubID field in the header (see 3.3) This field is always included in the message
→928	StatusValue	N	1 = Connected 2 = Not connected - down expected up 3 = Not connected - down expected down 4 = In Process	Int	Connection status This field is always included in the message
→929	StatusText	N		String	Additional information
	Standard Trailer	Y			

### 5.8.3 User Response (Msg Type = BF)

Message sent by HF MEFFGate to notify the status of the request initiated with the User Request message.

This message is only sent to the user who made the request.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = BF		
923	UserRequestID	Y		String	Identifier assigned by the client in the User Request message
553	Username	Y		String	User identifier
					Status of the User Request message
926	UserStatus	N	5 = Password Changed 6 = Other	Int	If rejected (value 6) , there is an explanation in the UserStatusText field
927	UserStatusText	N		String	When UserStatus = 6 there is an explanation of the rejection
	Standard Trailer	Y			

### 5.8.4 User Request (Msg Type = BE)

Message sent by the client to modify the password used in their connection to the HF MEFFGate

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = BE		
923	UserRequestID	Y		String (10)	Unique identifier for each User Request message
924	UserRequestType	Y	3 = Change Password For User	Int	
553	Username	Y		String	Identifier of the user assigned by MEFF. It is currently comprised of the combination of the member code and the user code
554	Password	Y*		String (10)	Old Password
925	NewPassword	Y*		String (10)	New Password
	Standard Trailer	Y			

### 5.8.5 Business Message Reject (MsgType = j)

Message sent by HF MEFFGate when it receives a supported message that is syntactically correct in an unsupported situation, and there is no specific rejection message. It is especially used to reject a Network Counterparty System Status Request message.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = j		
45	RefSeqNum	N		SeqNum	When present, indicates MsgSeqNum of the rejected message.  If value zero, the content of this field should not be considered.
372	RefMsgType	Y	.	String	MsgType of the rejected message
379	BusinessRejectRefID	N		String	Optional Identifier of the rejected message
380	BusinessRejectReason	Y	0 = Other 3 = Unsupported Message Type	Int	Reason for rejection
58	Text	N		String	Explanation of rejection
	Standard Trailer	Y			



## 6 Indications of Interest

### 6.1 Introduction

The Indication of Interest functionality allows HF MEFFGate clients to enter and receive information about the indications of interest entered from its own member or through Market Services.

### 6.2 Description

When a trader wishes to indicate interest in prices being quoted on the order book of a contract, he should use the Indication of Interest message.

Only one Indication of Interest per contract per each FIX client is allowed.

When the client wants to modify an indication of interest on an specific security, it should cancel the existing indication of interest first and then send a new message.

To cancel an indication of interest, a message Indication of Interest with IOITransType[28]=C (Cancel) must be used.

The system automatically cancels the Quote Request after a certain time.

In the public feed, when an indication of interest has been entered, HF MEFFGate sends an Indication of Interest message to notify of this situation (see the public data interface of HF MEFFGate for more details). Each message refers to a single contract and indicates the accumulated volume of all existing indications of interest for the contract. Accordingly, each new message replaces any previous messages for the same contract.

When a trader requests the cancellation of their indication of interest, clients are notified of the remaining volume. If there is no remaining volume, clients receive a message showing zero volume.

All indications of interest are cancelled at the end of the trading session.

### 6.3 List of messages


Message	Description
Indication of Interest sent to HF MEFFGate (Msg Type = 6)	Message sent by the HF MEFFGate client to request or cancel an indication of interest on a specific contract
Business Message Reject (MsgType = j)	Message sent by HF MEFFGate to reject an Indication of Interest message
Indication of Interest sent by HF MEFFGate (Msg Type = 6)	Message sent by HF MEFFGate to answer an indication of interest in a contract

### 6.4 Message flow


#### Indication of Interest accepted by HF MEFFGate followed by its cancellation

(In this example, for illustrative purposes, public messages are grey shaded. These messages can be received from the public data interface of HF MEFFGate).

The client sends an indication of interest of 100x on contract A (having a total volume of indications of interest of 4900x). Once the request has been accepted, the client receives a private Indication of Interest (IOI), indicating that the 100x have been accepted and a public IOI message, with the accumulated volume of the indications of interest on this contract (5000x). Then the indication of interest is cancelled. Once the cancelation is accepted the accumulated volume of the remaining indication of interest on contract A is sent (4900x)

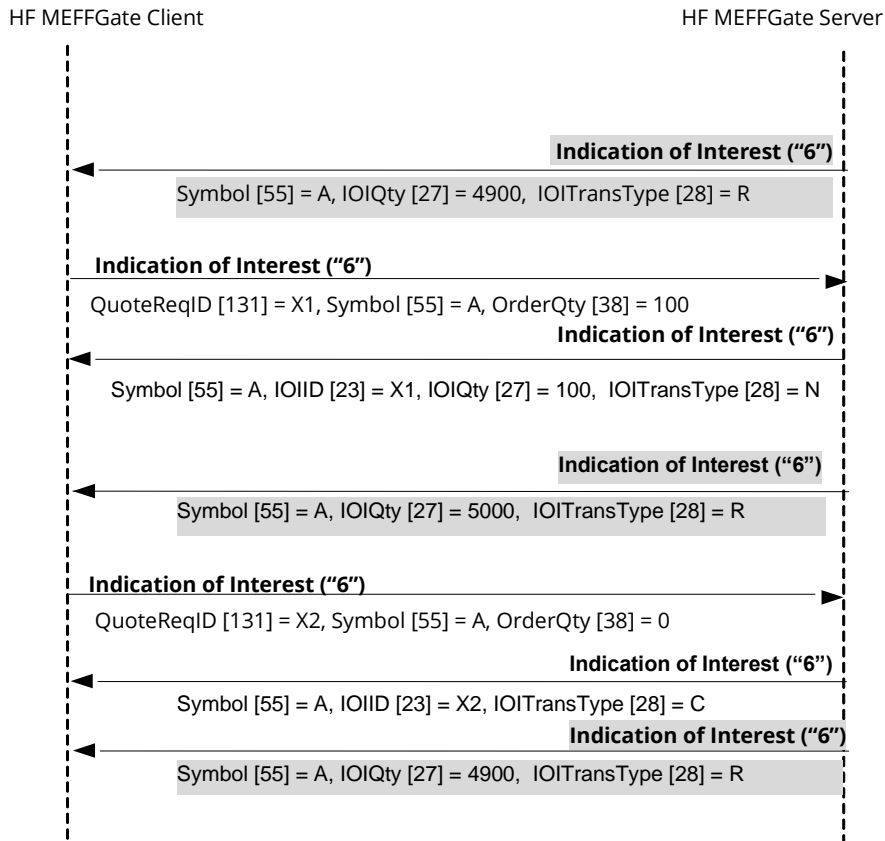

### Indication of Interest rejected by HF MEFFGate

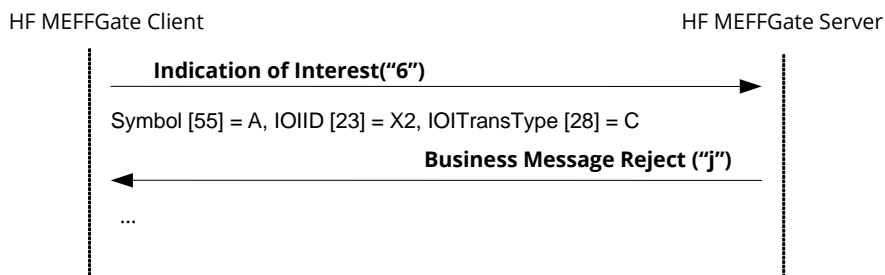

## 6.5 Annotations and adaptations of FIX 5.0

- None

## 6.6 Definition of messages

### 6.6.1 Indication of Interest sent to HF MEFFGate (Msg Type = 6)

Message sent by the HF MEFFGate client to request or cancel an indication of interest on a specific contract. Only one indication of interest can be sent in a single message

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 6		
23	IOIID	Y		String	Identifier for this message
28	IOITransType	Y	N=New C=Cancel	Char	
	Start <Instrument>				
55	Symbol	Y		String (22)	Contract code
	End <Instrument>				
54	Side	Y	7=Undisclosed	Char	Indications of interest don't signal a specific Sell or Buy sign
27	IOIQty	Y	0-99999999 Integer numbers only	Qty	Volume of the request. Ignored if IOITransType[28]=C
	Standard Trailer	Y			

## 6.6.2 Indication of Interest sent by HF MEFFGate (Msg Type = 6)

Message sent by HF MEFFGate to notify an indication of interest on a specific contract.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 6		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
23	IOIID	Y		String	Identifier sent by client, QuoteReqID [131], in Quote Request message
28	IOITransType	Y	N = New C = Cancel	Char	N = New Request C = Cancellation of Request
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Contract code
48	SecurityID	N		String(12)	ISIN security code
22	SecurityIDSource	N	4 = ISIN Number	String	
	End <Instrument>				
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	See section 4.3 - Parties block
→ 447	PartyIDSource	N	D = Proprietary/ Custom code	Char	
→ 452	PartyRole	N	13 = Order Origination Firm  11 = Order Origination Trader	Int	Indicates the role taken by the code specified in PartyID
	End <Parties>				
54	Side	Y	7 = Undisclosed	Char	The indications of interest only define the contract and the volume but not if it is to buy or sell
27	IOIQty	Y	0 - 999999999, integer numbers only.	String	Volume of the request.  Ignored if IOITransType[28]=C
60	TransactTime	N		UTCTimeStamp	Event time
	Standard Trailer	Y			

## 7 Order management and trades notification

### 7.1 Introduction

Order management covers various functions. From the perspective of a FIX client these are:

- Enter orders
- Modify orders
- Cancel orders
- Mass cancellation of orders
- Notification of order execution and information of trades

There is a separate section on each of these functions in this chapter. There is a description of the method of use, the list of related messages, the message flow and the additions or annotations incorporated in this implementation for each function. At the end of the chapter there is a detailed description of all the messages included in the chapter.

All the information provided in this chapter is valid for both single contracts and time-spreads, as time-spread orders are made on a previously defined contract (as opposed to the contracts that they are made up of).

### 7.2 Order management on behalf of a trader

HF MEFFGate offers the possibility, from a privileged multi-trader user, to enter and manage orders on behalf of another trader of the member.

## 7.3 Enter orders

### 7.3.1 Description

The FIX client uses this function to enter orders in the trading system.

Once an order has been accepted, it can be modified, cancelled or executed. These subjects are covered in detail in other sections of this chapter.

In the MEFF trading system each order is associated with an account. The FIX client usually indicates the account in the Account field. If the account is not specified when a new order is entered, the order will be assigned to the daily account. If a client does not have a daily account set up, an order without the account will be rejected. The account of an order can be modified while the order is alive, as described in 7.4.

The reference for the order has a maximum length of 15 characters and must be introduced in the Text field.

There are various relevant fields for the identification of orders. More information can be found in section "4.1 - Order identification".

### 7.3.2 Order entry status

When the order request has been sent to HF MEFFGate it can be directly rejected by HF MEFFGate or the central systems, in which case an Execution Report message is received where the field ExecType [150] = 8 (Rejected).

Based on an optimistic model, the client application can send modifications or cancellations for an order before receiving the Execution Report message with ExecType [150] = 0 (New).

When the request has been accepted by the central system, the client application will receive an Execution Report message with the field ExecType [150] = 0 (New). At this moment it can be considered that the order is active in the market.

If a situation arises that causes the order to be rejected by the central systems, an Execution Report message will be received with the field ExecType [150] = 0 (New), but in this case it will be followed by an Execution Report message with the field ExecType [150] = 4 (Cancelled).

If the order entered is a Stop, when the Stop is triggered, MEFFGate sends a new Execution Report message with the field ExecType = L (Triggered) reflecting the situation of the order after the trigger.

### 7.3.3 Supported order types and validity of orders

When sending the order request, the order type is specified by the combination of the OrdType and TimeInForce fields. 'MEFF Order Types' chapter has a list of all order types supported in MEFF and the corresponding values of these two fields in each case.

Moreover, according to the data specified in the Security List message, the features of hidden volume may be used.

### 7.3.4 Order persistence on connection loss

When sending an order request, it can be established if, in the event of a disconnection, the central system will cancel the pending volume or not.

This functionality is only valid for certain order types, detailed in 'MEFF Order Types' chapter. This functionality is not allowed in an order entered through a privileged user.

When an order is automatically cancelled in the event of a disconnection, a cancellation Execution Report message is sent.


### 7.3.5 List of messages

Message	Description
New Order - Single (Msg Type = D)	Used by the client to enter a new order
Execution Report (Msg Type = 8)	Sent by MEFF to confirm or reject the order

### 7.3.6 Message flow


In the following diagrams the values next to "Execution Report" correspond to the ExecType [150] and OrdStatus [39] fields, respectively.

#### New order entry accepted by HF MEFFGate and central systems

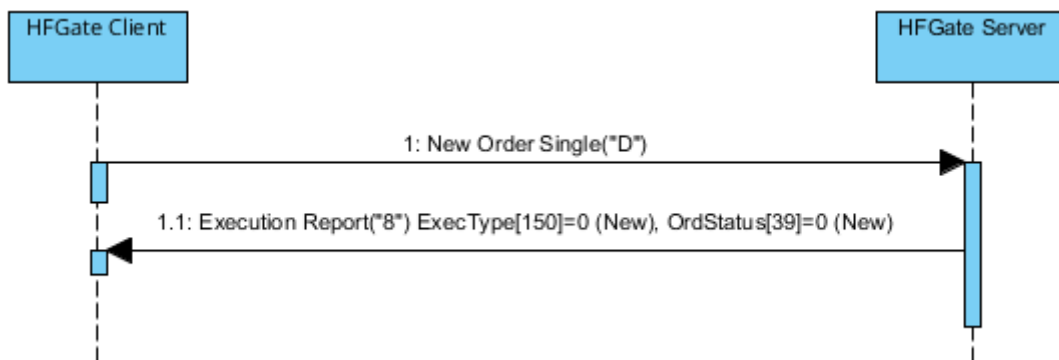


#### New order entry rejected by HF MEFFGate or central systems

When a new order message is directly rejected by HF MEFFGate, the client receives an Execution Report message with ExecType [150] = 8 (Rejected). The value of OrdStatus [39] is 8 (Rejected) except when the rejection occurs because the ClOrdID is duplicated, in which case this is notified in the order status corresponding to this ClOrdID.

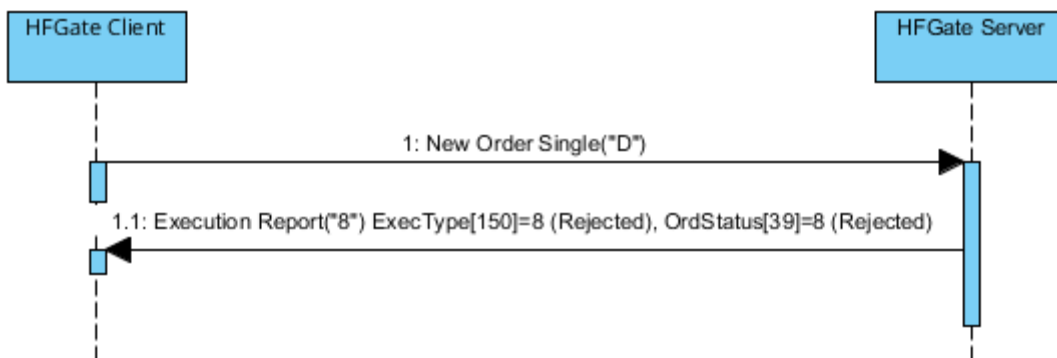




### Entry of a stop order and triggering of the order

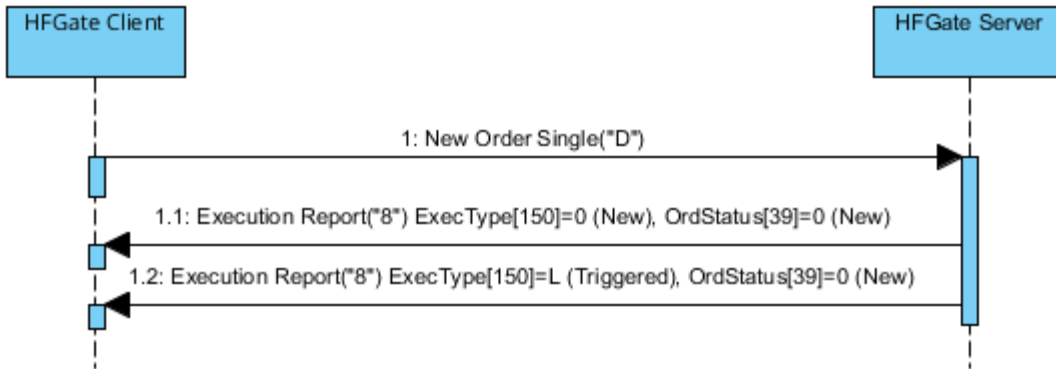

### ReceivePendings [5678] (Logon) = Y: New order entry accepted by HF MEFFGate and central systems

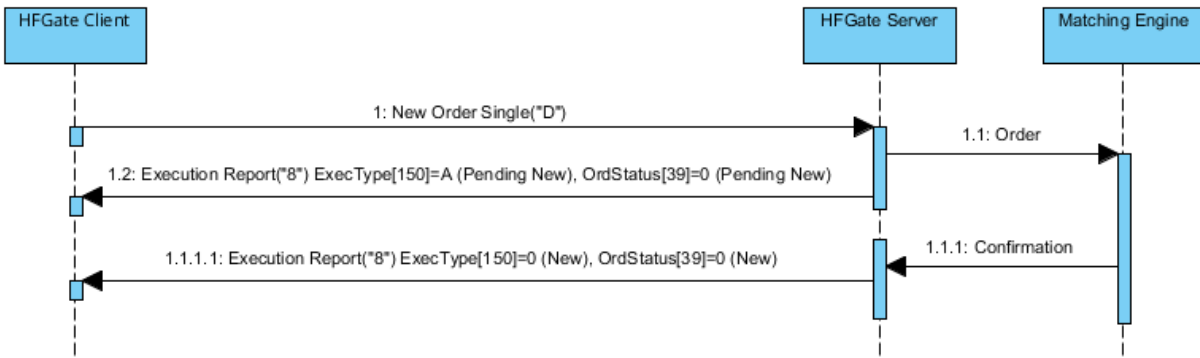

### 7.3.7 Annotations and adaptations of FIX 5.0

In the New Order Single message, the OrderQty field is now required

The fields FirmAllocText [1732], FirmMnemonic [1729], AllocText [161] and AlgorithmicTradeIndicator [2667] have been added to the New Order Single message

Added optional user field SelfMatchPreventionType [21506] to New Order Single and Execution Report messages

## 7.4 Modify orders

### 7.4.1 Description

When an order has been entered, but not fully executed it is possible to modify various attributes.

The following order attributes can be modified on MEFF:

- Account
- Volume
- Price
- Stop price
- Text (client order reference)
- Give-up reference
- Give-out internal reference
- Give-out mnemonic
- MiFID II tags:
  - Client identification (PartyRole [452] with value 3)
  - Party responsible for the investment decision within Firm (PartyRole [452] with value 122)
  - Party responsible for the Execution within Firm (PartyRole [452] with value 12)
  - DEA order flag (OrderOrigination [1724])
  - Liquidity provision flag (OrderAttributeType [2594] = 2 + OrderAttributeValue [2595] = "Y")
  - Trading capacity (LastCapacity [29])
  - Self-Match prevention (SelfMatchPreventionID [2362])
  - Self-Match prevention type (SelfMatchPreventionType [21506])
  - Algorithmic order flag (AlgorithmicTradeIndicator [2667])
- Date of order expiration (last day the order can trade), for Good Till Day orders (ExpireDate [432])

Changes in any of these fields do not affect the volume previously filled.

The modification is made with the Order Cancel/Replace Request message, also called Order Modification Request.

Every modification message must specify a unique ClOrdID, just like the new order entry messages. The order to be modified is identified by the tag OrigClOrdID.

When a modification request is accepted and completed, the ClOrdID tag specified in the order modification request will become valid. Hence, the modified order replaces the original order through the use of this tag.

As a general rule, according to the FIX standard, all the application-level fields in the Order Modification Request should be retransmitted with the original values in the original order, except the fields that are being changed. Fields that are not specified implies will initialize it with the default value specified for the field.

Apart from the ClOrdID tag and the values to be modified, the FIX standard requires a number of redundant fields: Symbol (or ISIN code) and Side. These fields must be completed in the order modification request with the same values as the original order. If any of the values fail to match, the request is rejected with an Order Cancel Reject message with CxlRejReason = 2 (Broker/Exchange Option) and there is an explanation in the Text field.

The FIX standard also allows, as an optional feature, the volume of a fully filled order to be increased, effectively re-opening the order; this feature is not supported by MEFF.

The specifications of FIX 5.0 present a group of tables in the appendices to volume 4 that describe the message flows and the effects on the order status. Modification of the following tables is supported: C.1.a, C.1.b, C.2.a, C.3.a, C.3.b, C.3.c, D.1.a, D.1.b, D.1.c, D.2.a, D.2.b and D.2.d.

Table C.1.c is not supported.

## 7.4.2 Order modification request status

When an order modification request is sent to HF MEFFGate, it can be rejected directly by HF MEFFGate or the central systems, in which case an Order Cancel Reject message is received.

When the request has been accepted by the central system, the client application will receive an Execution Report message with the field ExecType [150] = 5 (Replaced), indicating that the modification has been done.


## 7.4.3 List of messages

Message	Description
Order Modification Request (Msg Type = G) (a.k.a. Order Cancel / Replace Request)	Used by the client to initiate order modification request
Execution Report (Msg Type = 8)	Sent by HF MEFFGate to notify status of modification request
Order Cancel Reject (Msg Type = 9)	Sent by HF MEFFGate to notify the rejection of order modification request


## 7.4.4 Message flow

The following diagrams show the values that appear in the the Execution Report in the ExecType [150] and OrdStatus [39] fields respectively. When OrdStatus [39] is shown as "<status>" it refers to the current status of the order, regardless of what its status is.

### Order modification accepted by HF MEFFGate and central systems

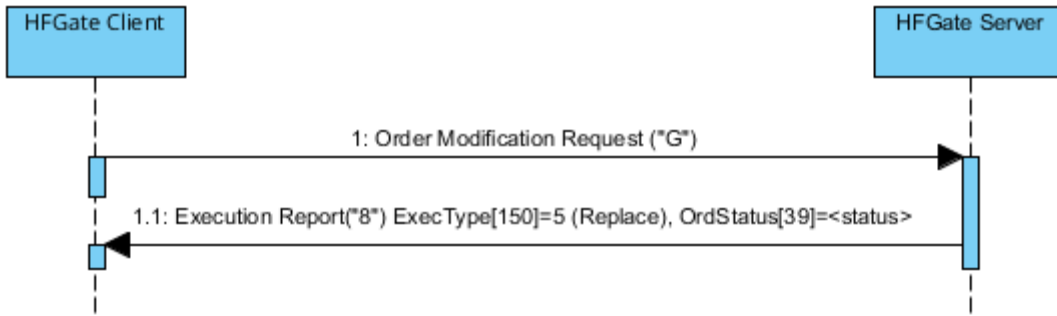


### Order modification rejected by HF MEFFGate

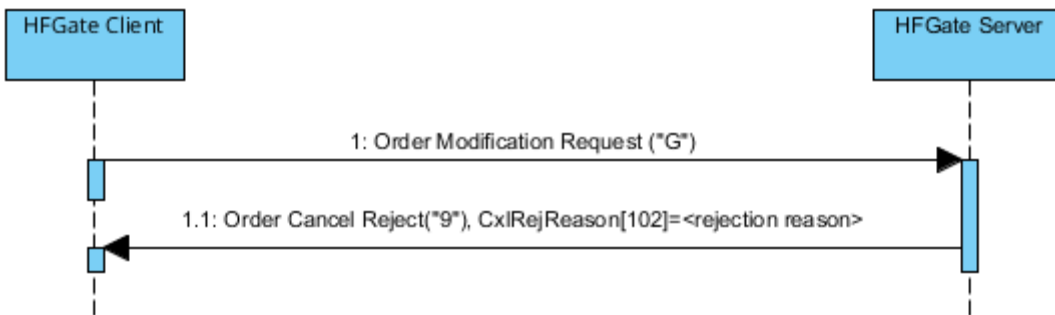


### Modification request accepted by HF MEFFGate of an order executed in the moment it is requested

If the order to modify is executed in the intervening period between sending the modification request and its reception, the system will inform of said execution with an Execution Report message with ExecType [150] = F (Trade) and OrdStatus [39] = 2 (Filled). Also an Order Cancel Reject is sent by HF MEFFGate notifying the Order Modification Request has been rejected because the order execution on the fly.

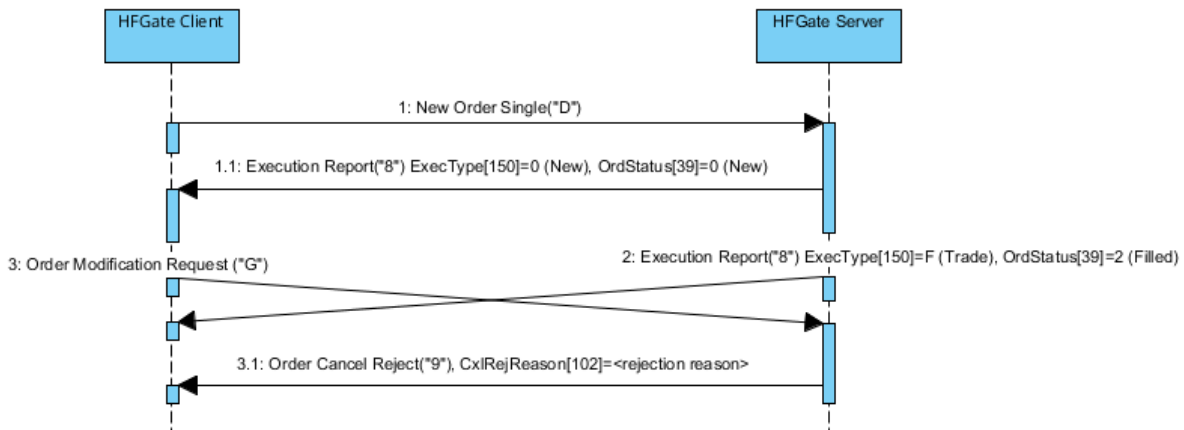

## ReceivePendings [5678] (Logon) = Y: Order modification accepted by HF MEFFGate and central systems

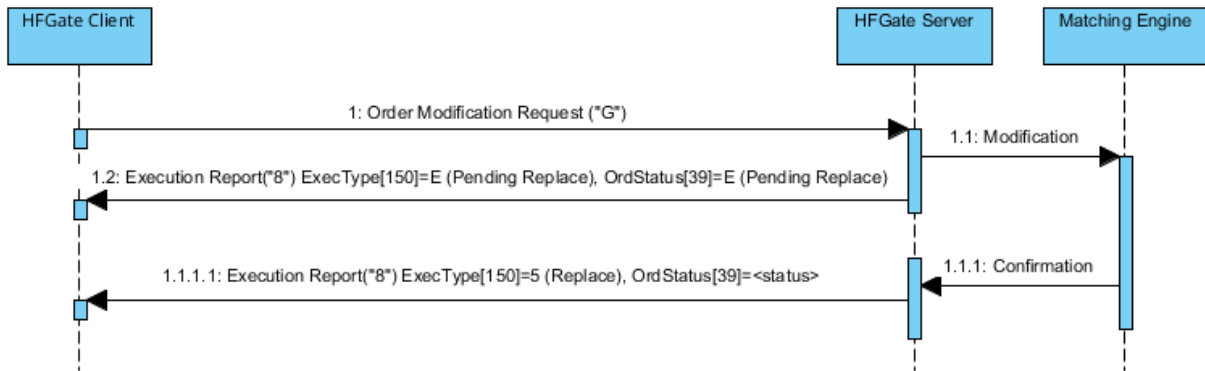

### 7.4.5 Annotations and adaptations of FIX 5.0

In the Order Modification Request message, the OrderQty [38] field is now required

The fields FirmAllocText [1732], FirmMnemonic [1729], AllocText [161] and AlgorithmicTradeIndicator [2667] have been added to the Order Modification Request message

Added optional user field SelfMatchPreventionType [21506] to Order Modification Request message

## 7.5 Cancel orders

### 7.5.1 Description

Once an order has been entered, it can be cancelled at any time. The cancellation request is made with the Order Cancel Request message.

The Order Cancel Request message is used to cancel a specific order. The order to be cancelled is identified by the OrigClOrdID tag. In addition, the cancellation message must have a unique ClOrdID tag, just like the order entry and order modification messages.

The FIX standard requires certain redundant values to be included in the message: Symbol and Side. These fields must contain the same values as the order to be cancelled. If the values are not identical, the request will be rejected with the Order Cancel Reject message with the field CxlRejReason = 2 (Broker/Exchange Option) and an explanation in the Text field.

Note that the client does not have to wait for the order confirmation when it wants to cancel. In this case the client should use the ClOrdID of the pending request, assuming that it will be accepted.

### 7.5.2 Status of order cancellation request

When an order cancellation request is sent to HF MEFFGate, it can be rejected directly by HF MEFFGate or the central systems, in which case an Order Cancel Reject message is received.

After a request has been accepted by HF MEFFGate, and therefore sent to the central systems, one of the following situations will occur:

- **Cancellation of the order.** When the order is cancelled because of the request sent, an Execution Report message is received with ExecType [150] = 4 (Cancelled)
- **Cancellation of the order by Market Surveillance.** If a cancellation request, for the same order, sent by the MEFF Market Surveillance reaches the central systems before the own request, an Execution Report message will be received with ExecType [150] = 4 (Cancelled) due to the action of a third party. Also, an Order Cancel Reject is sent by HF MEFFGate notifying the Order Cancel Request has been rejected because the order is fully executed.
- **Execution of the order.** If the order to be cancelled is executed in the intervening period between sending the cancellation request and its reception, the system will inform of said execution with an Execution Report message with ExecType [150] = F (Trade) and OrdStatus [39] = 2 (Filled). Also, an Order Cancel Reject is sent by HF MEFFGate notifying the Order Cancel Request has been rejected because the order is fully executed.

When a cancellation is accepted and completed, the order is assigned the ClOrdID tag in the cancellation request message as its identifier.


### 7.5.3 List of messages

Message	Description
Order Cancel Request (Msg Type = F)	Used by the client to request the cancellation of an order
Execution Report (Msg Type = 8)	Sent by HF MEFFGate to notify status of cancellation
Order Cancel Reject (Msg Type = 9)	Sent by HF MEFFGate to notify rejection of cancellation request


### 7.5.4 Message flow

In the following diagrams, the values that appear after the “Execution Report” correspond to the ExecType [150] and OrdStatus [39] fields, respectively. When OrdStatus [39] is shown as “<status>” it refers to the current status of the order, regardless of its value.

#### Cancellation request accepted by HF MEFFGate and central systems

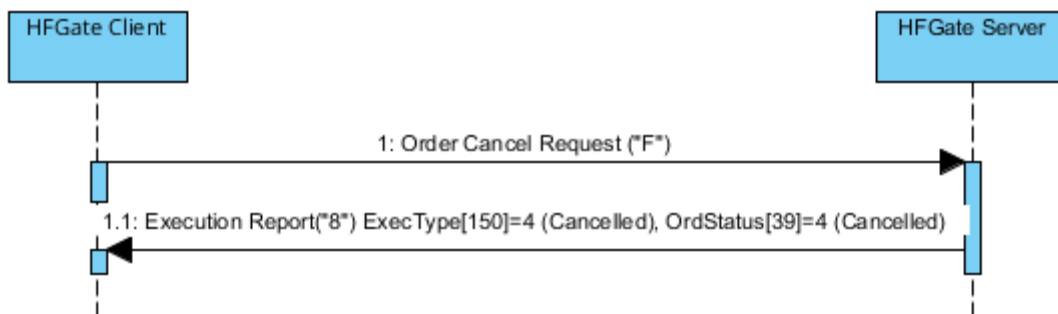

#### Cancellation of order before receiving a previous “Replace” status

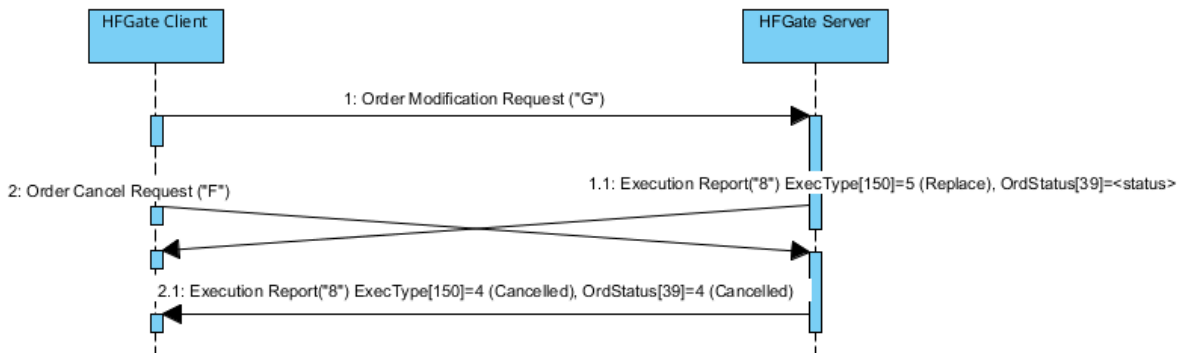


#### Cancellation request rejected by HF MEFFGate




### Cancellation request accepted by HF MEFFGate of an order executed in the moment it is requested

If the order to cancel is executed in the intervening period between sending the cancellation request and its reception, the system will inform of said execution with an Execution Report message with ExecType [150] = F (Trade) and OrdStatus [39] = 2 (Filled). Also, an Order Cancel Reject is sent by HF MEFFGate notifying the Order Cancel Request has been rejected because the order is fully executed.

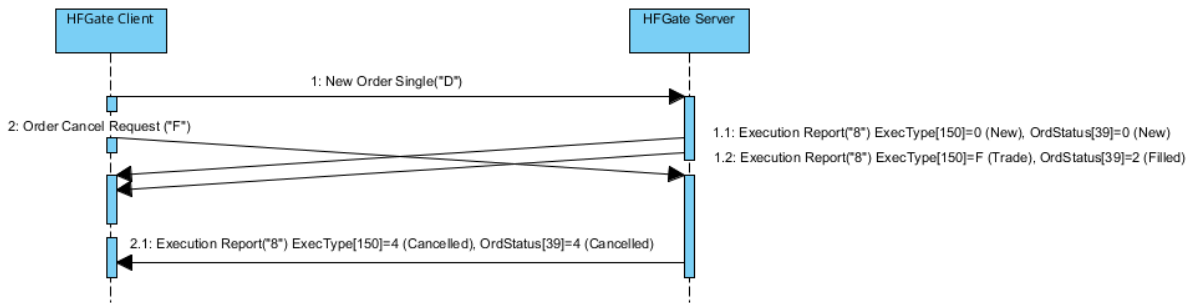

### ReceivePendings [5678] (Logon) = Y: Cancellation request accepted by HF MEFFGate and central systems

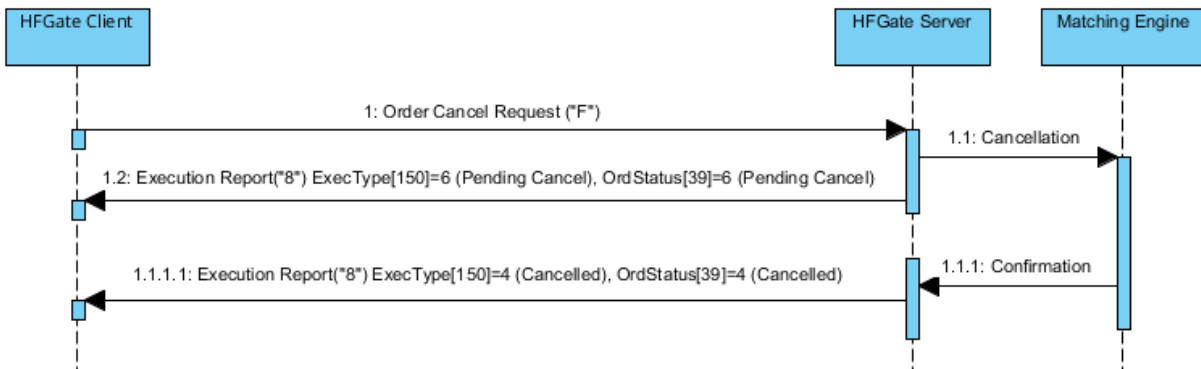

#### 7.5.5 Annotations and adaptations of FIX 5.0

No annotations or adaptations have been made to the messages in this chapter



## 7.6 Mass cancellation of orders

### 7.6.1 Description

This function allows a group of orders to be cancelled simultaneously. The orders to be cancelled can be identified by specifying selection criteria. Please note that with this message, the pending quotes will not be cancelled.

### 7.6.2 Selection criteria

The selection criteria for orders to be cancelled provided by MEFF (using the Order Mass Cancel Request message) are the following:

- **Instrument.** Allows orders on a certain type of instrument to be selected using the Instrument block, as described in 4.4:
- **Symbol [55]**
- **SecurityType [167]**
- **SecurityID [48]**
- **MaturityMonthYear [200]**
- **Account.** Allows orders on a specific account or group of accounts to be selected. This selection is done using the Account field. The use of the wildcard “?” to make multiple selection is only allowed in the five positions at a time or in the last two positions. In the later case it must be used in both simultaneously
- **Buy/sell.** Allows buy orders and sell orders to be selected

When various criteria are used to make a selection, only the orders that meet all the criteria will be selected.

Selection criteria that are not used will be ignored when selecting orders. If no selection criteria are specified all orders will be included.

### 7.6.3 Status of mass cancellation request

Whether or not the mass cancellation is accepted or rejected, the server sends an Order Mass Cancel Report message. When the request is rejected, the MassCancelResponse field will be “0”. When it is accepted the value of the field will be “7”, even if there are no orders that meet the selection criteria.

The acceptance message should not be considered as confirmation of the cancellation. The server will send an Execution Report message for each of the orders cancelled.

### 7.6.4 ClOrdID field

In the corresponding Execution Report messages in which the cancellations are notified there is the OrigClOrdID field that identifies in a unique manner each of the cancelled orders.

Note that, in accordance with the standard, the ClOrdID field will contain the same value in all these messages, which corresponds with the ClOrdID that was assigned in the Order Mass Cancel Request message. Accordingly, it should be noted that from this moment on, the cancelled orders will all have the same ClOrdID.


More information on the CIOrdID field can be found in section 4.1.1.

### 7.6.5 List of messages


Message	Description
Order Mass Cancel Request (Msg Type = q)	Request to cancel orders that meet selection criteria
Order Mass Cancel Report (Msg Type = r)	Message sent by HF MEFFGate to confirm if mass cancellation is accepted or rejected. It is not used to confirm that cancellations have been processed
Execution Report (Msg Type = 8)	Message sent by HF MEFFGate to notify each individual cancellation due to the Order Mass Cancel Request message

### 7.6.6 Message flow

#### Mass cancellation order request accepted

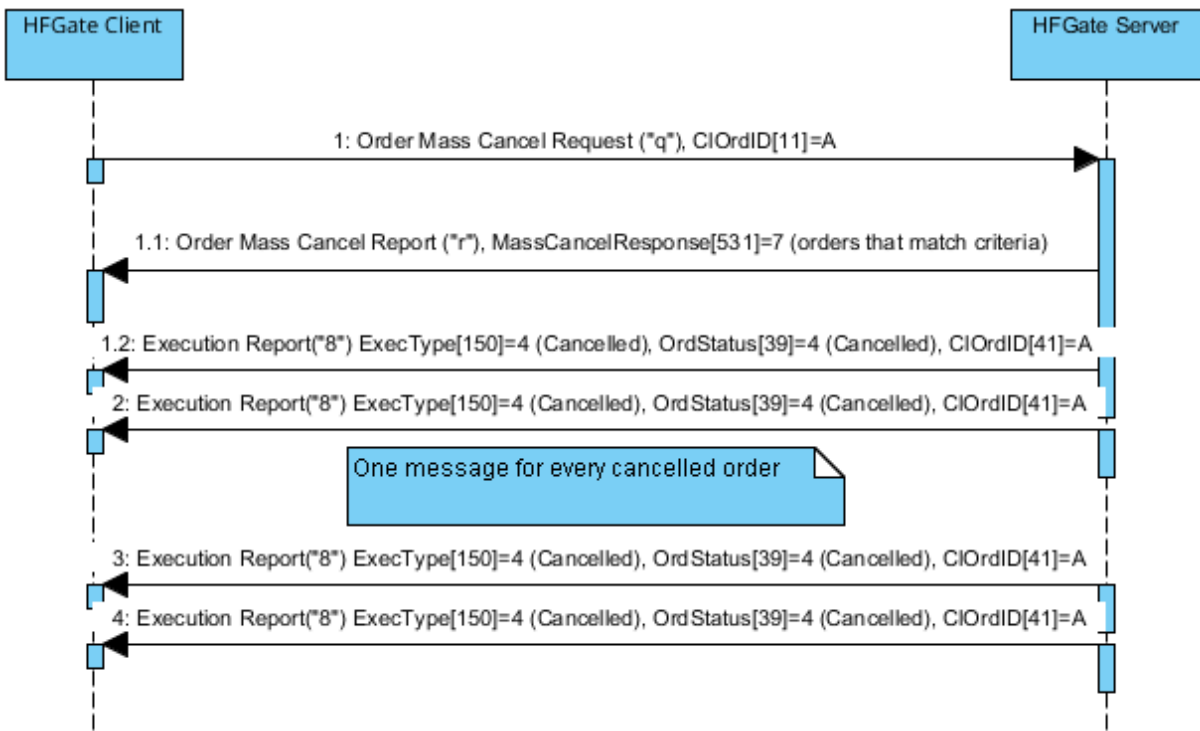

#### Mass order request rejected

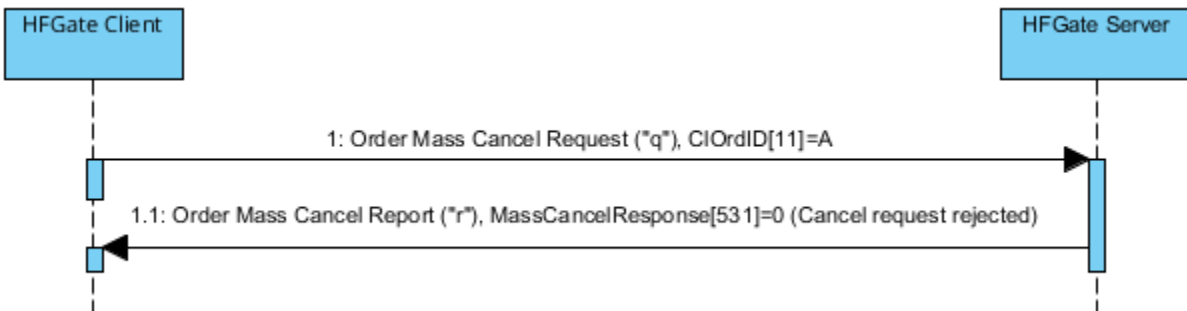

## 7.6.7 Annotations and adaptations of FIX 5.0

The optional Account [1] field has been added to the Order Mass Cancel Request message

The RejectText [1328] field has been added to the Order Mass Cancel Report message

## 7.7 Notification of execution

### 7.7.1 Description

When an order is filled or partially filled, HF MEFFGate sends an Execution Report message to notify this, where the field ExecType [150] = "F" (Trade).

When the Execution Report message is used to notify a trade, it specifies the type of trade in the TrdType [828] and TrdSubType [829] field. See table 4 in document "Codification Tables" for a list of possible values for this field and their descriptions.

In general terms, an Execution Report message will be received once a trade is accepted by the host, including the cross trades.

### 7.7.2 Trade cancellation / Trade amendment

When a trade is cancelled or amended, HF MEFFGate sends an Execution Report message with tag ExecType [150] = "H" (Trade Cancel) or "G" (Trade Correct). The ExecRefID [19] field contains the original trade registration number (TrdMatchID) of the cancelled trade or the amended trade.


### 7.7.3 List of messages

Message	Description
Execution Report (Msg Type = 8) (ExecType [150] = F)	Sent by HF MEFFGate to notify the order has been filled or partially filled

## 7.7.4 Message flow

### Notification of execution

The client receives the Execution Report message for each partial fill or complete fill of an order.

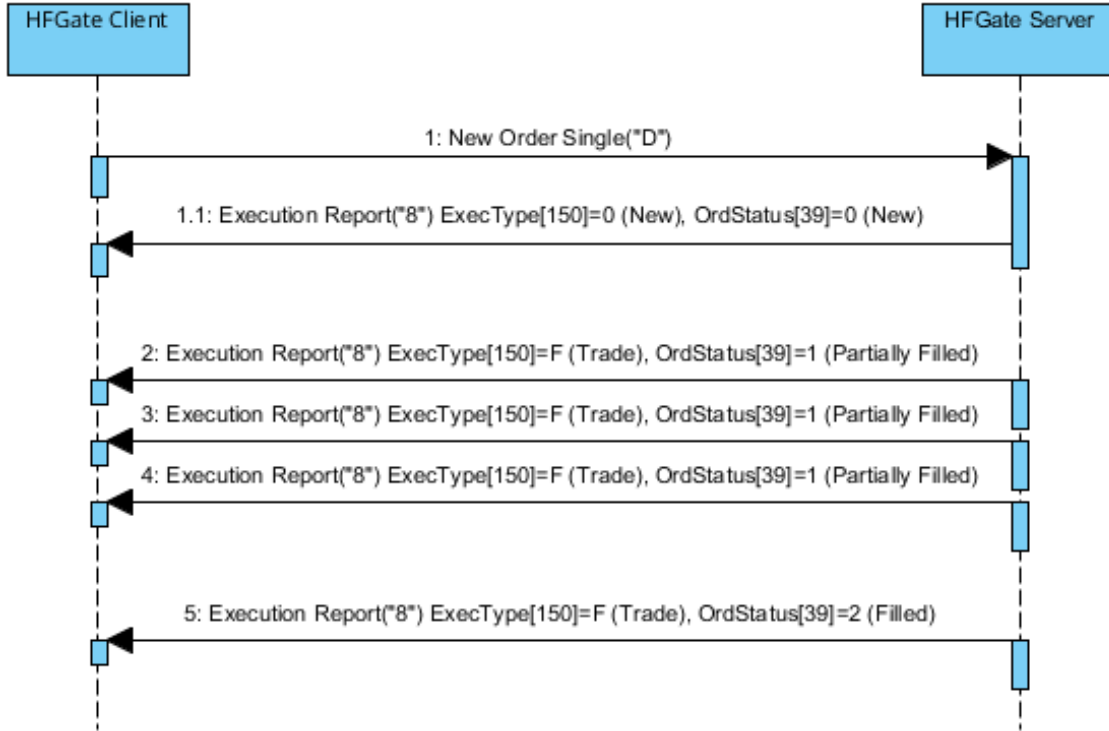

### 7.7.5 Annotations and adaptations of FIX 5.0

The following fields: FirmAllocText [1732], FirmMnemonic [1729], AllocText [161], ClearingInstruction [577], RegulatoryReportType [1934], TradeCondition [277] and MarketID [1301] have been added to the Execution Report message

Added optional user field SelfMatchPreventionType [21506] to the Execution Report message.

## 7.8 Order Status Request

### 7.8.1 Description

This section covers the functionality related to a query on a specific order to be checked using its ClOrdID

This function is limited to orders entered during the current trading session by the own trader.

The response is given as a single Execution Report message, showing the latest status of the order. If there is an error in the query, it is rejected with a Business Message Reject message.

The ClOrdID used will have to coincide with the last of the order. The query of a ClOrdID that has been replaced, through an order cancellation or modification, will be rejected with a Business Message Reject message.

Unlike the majority of order management messages, the ClOrdID field in the Order Status Request message must contain the reference for the order being consulted.


Note that the FIX standard for the order status request requires two redundant fields: Symbol and Side. The values for these fields must coincide with those in the original order.

### 7.8.2 List of messages

Message	Description
Order Status Request (Msg Type = H) Order Status Request (Msg Type = H)	Status request for a specific order
Execution Report (Msg Type = 8)	Information on the order status
Business Message Reject (MsgType = j)	Notification of error in request

### 7.8.3 Message flow

#### Status request for a specific order

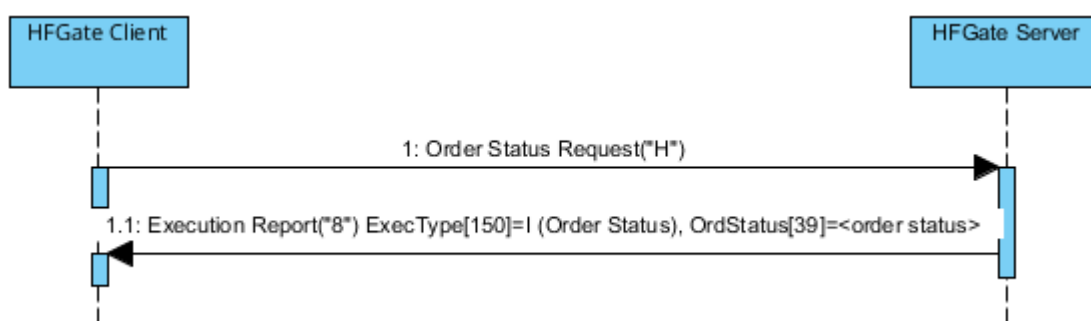

### 7.8.4 Annotations and adaptations of FIX 4.4

In the Order Status Request message, the OrdStatusReqID [790] field is now required

## 7.9 Definition of messages

### 7.9.1 New Order - Single (Msg Type = D)

Message sent by client to enter order in the system.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = D		
11	ClOrdID	Y		String(30)	Unique order identifier
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N	For PartyRole [452] = 3, 12 or 122, this is an unsigned integer field, greater or equal than 0 and less than 232	String	See section 4.3 - Parties block For the Take-up Trading Firm (PartyRole = 96) the length for this tag is 4 characters
→447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID	Char	Required if NoPartyIDs is specified Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
→452	PartyRole	N	11 = Order Origination Trader  12 = Execution within Firm ID  13 = Order Origination Firm  96 = Take-up Trading Firm  122 = Investment Decision within Firm ID	Int	Indicates the role taken by the code specified in PartyID [448]. Required if NoPartyIDs [453] is specified.
	End <Parties>				
1	Account	N	Fixed length	String(5)	Account code. If there is no account code the daily account is used
	Start <PreAllocGrp>				
78*	NoAllocs	N	1	NumInGroup	Number of destinations. HF MEFFGate only accepts a single destination. In this block the member who is entering the order, can also send all the necessary information to initiate an automatic give-up to the Clearing Broker once the trade is made and for the whole volume. This

Tag	Name	Req	Valid values	Format	Description
					information is: Give-up reference, give-out internal reference and Give-up mnemonic
→79*	AllocAccount	N	[N/A]	String	Always [N/A]
→1729*	FirmMnemonic	N		String (10)	Give-out mnemonic
→161*	AllocText	N		String (18)	Give-up reference
					Reference assigned by the Executing Broker for internal purposes.
→1732*	FirmAllocText	N		String (18)	It is associated to a Give-out mnemonic and it can be not unique. Need not be provided.
	End <PreAllocGrp>				
18	ExecInst	N	n = Not Cancel on connection loss (default) o = Cancel on connection loss	MultipleChar Value (ver 4.5)	It is used to indicate the action taken by the MEFF central system in the event of a disconnection. Value "o" means to cancel the pending volume. Not informing this tag or value "n" means the order will remain in the order book.
2362	SelfMatchPreventionID	N	Numeric, > 0, <= 999	String	Self-Match prevention
21506*	SelfMatchPreventionType	N	1 - reject aggressive order (default) 2 - reject passive order 3 - reject both orders: aggressive and passive	String	Self-Match prevention type. Indicates the behavior to follow when applying the Self-Match Prevention mechanism.
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Contract code
	End <Instrument>				
54	Side	Y	1 = Buy 2 = Sell	Char	
60	TransactTime	Y		UTC Timestamp	Time order request was made
	Start <Stipulations>				
232	NoStipulations	N		Int	
→233	StipulationType	N	RETAIL = Retail Client Indicator	String	
→234	StipulationValue	N		String	When StipulationType [233] = RETAIL, indicates if the order is retail:



Tag	Name	Req	Valid values	Format	Description
	End <Stipulations>				
	Start <OrderQtyData>				
38	OrderQty	Y*		Qty	Order volume
	End <OrderQtyData>				
40	OrdType	Y	See 'MEFF Order Types' chapter	Char	Order type
44	Price	N		Price	Order price
99	StopPx	N		Price	Stop price. Required if OrdType is 4
	Start <TriggeringInstruction>				
1100	TriggerType	N	4 = Price Movement 1 = Best Offer 2 = Last Trade 3 = Best Bid	char	Triggering Instruction for the Stop limit order.  If component block <TriggeringInstruction> is not specified when the order is sent, then the Stop limit order is triggered at Last Trade.
1107	TriggerPriceType	N	4 = Best Bid or Last Trade 5 = Best Offer or Last Trade 6 = Best Mid Bid-Offer	char	The <TriggeringInstruction> block will not be present in segments where there is only one type of stop order, that is, in financial derivatives.
	End <TriggeringInstruction>				
59	TimeInForce	N	See 'MEFF Order Types' chapter	Char	Indicates how long order is valid
432	ExpireDate	N		LocalMktDate	Date of order expiration (last day the order can trade). Required if TimeInForce [59] = GTD
58	Text	N		String(15)	Order reference given by client
77	PositionEffect	N	O=Open (default) C=Close	Char	Indicates whether the resulting position after a trade should be an opening position or closing position
1724	OrderOrigination	N	5 = Order received from a direct access or sponsored access customer	Int	DEA order flag
	Start <OrdAttrib>				
2593	NoOrderAttributes	N		NumInGroup	

Tag	Name	Req	Valid values	Format	Description
→2594	OrderAttributeType	N	2	String	Liquidity provision flag
→2595	OrderAttributeValue	N	Y	String	Liquidity provision flag
	End <OrdAttrib>		1 = "AOTC"		
29	LastCapacity	N	3 = "MTCH" 4 = "DEAL"	Char	Trading capacity
2667*	AlgorithmicTradeIndicator	N	1 = Algorithmic (submitted by a trading algorithm)	Int	Algorithmic order flag
	Standard Trailer	Y			

## 7.9.2 Order Cancel Request (Msg Type = F)

Message sent by client to request cancellation of order.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = F		
41	OrigClOrdID	Y		String(30)	ClOrdID of order to cancel
11	ClOrdID	Y		String(30)	Cancellation identifier. It becomes the order identifier when the cancellation is processed
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	See section 4.3 - Parties block
→ 447	PartyIDSource	N	D = Proprietary/ Custom code	Char	Required if NoPartyIDs is specified
→ 452	PartyRole	N	13 = Order Origination Firm  11 = Order Origination Trader	Int	Indicates the role taken by the code specified in PartyID. Required if NoPartyIDs is specified
	End <Parties>				
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Must contain the same value as specified in the original order
	End <Instrument>				
54	Side	Y	1 = Buy  2 = Sell	Char	Must contain the same value as specified in the original order
60	TransactTime	Y		UTC Timestamp	Time order request was made
	Standard Trailer	Y			

### 7.9.3 Order Modification Request (Msg Type = G)

(This message is also known as Order Cancel/Replace Request)

Message used to request order modification.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = G		
	Start <Parties>				If it's being unchanged, must contain the same information as in the original order
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N	For PartyRole [452] = 3, 12 or 122, this is an unsigned integer field, greater or equal than 0 and less than 232	String	See section 4.3 - Parties block For the Give-Up Clearing Firm (PartyRole = 96) the length for this tag is 4 characters.
→ 447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID	Char	Required if NoPartyIDs is specified Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
→ 452	PartyRole	N	11 = Order Origination Trader  12 = Execution within Firm ID  13 = Order Origination Firm  96 = Take-up Trading Firm  122 = Investment Decision within Firm ID	Int	Indicates the role taken by the code specified in PartyID [448].  Required if NoPartyIDs [453] is specified.
	End <Parties>				
41	OrigClOrdID	Y		String(30)	ClOrdID of order to substitute
11	ClOrdID	Y		String(30)	Modification identifier. It becomes the order identifier when the modification is made
					New account code.
1	Account	N	Fixed length	String(5)	If it's being unchanged, must contain the same value as in the original order.

Tag	Name	Req	Valid values	Format	Description
	Start <PreAllocGrp>				If not specified, the daily account is used.
					Number of destinations. HF MEFFGate only accepts a single destination. In this block the member who is entering the order, can also send all the necessary information to initiate an automatic give-up to the Clearing Broker once the trade is made and for the whole volume. This information is: Give-up reference, give-out internal reference and Give-up mnemonic
78*	NoAllocs	N	1	NumInGroup	
					If not specified, HF MEFFGate will delete (if it exists) this information block from the original order.
					If specified then it is necessary to inform the whole information for this block.
→ 79*	AllocAccount	N	[N/A]	String	Always [N/A]
→ 1729*	FirmMnemonic	N		String (10)	Give-out mnemonic
→ 161*	AllocText	N		String (18)	Give-up reference
					Reference assigned by the Executing Broker for internal purposes.
→ 1732*	FirmAllocText	N		String (18)	It is associated to a Give-out mnemonic and it can be not unique. Need not be provided.
	End <PreAllocGrp>				
					Self-Match prevention
2362	SelfMatchPreventionID	N	Numeric, > 0, <= 999	String	If it's being unchanged, must contain the same value as in the original order
21506*	SelfMatchPreventionType	N	1 - reject aggressive order (default) 2 - reject passive order	String	Self-Match prevention type. Indicates the behavior to follow when applying the Self-Match Prevention mechanism.

Tag	Name	Req	Valid values	Format	Description
			3 - reject both orders: aggressive and passive		If it's being unchanged, must contain the same value as in the original order
	Start <Instrument>				
→55	Symbol	Y	Contract code	String(22)	Must contain the same value as in the original order
	End <Instrument>				
54	Side	Y	1 = Buy 2 = Sell	Char	Must contain the same value as in the original order
60	TransactTime	Y		UTC Timestamp	Time order request was made
	Start <OrderQtyData>				
→38	OrderQty	Y*		Qty	New total intended Order Quantity (including the amount already executed for this chain of orders). For example, if the original order were of 20 securities, a partial execution of 5 securities took place, and the original order is wanted to reduce it in 1, this field should be accomplished with value 19.
					If it's being unchanged, must contain the same value as in the original order
	End <OrderQtyData>				
40	OrdType	Y	See 'MEFF Order Types' chapter	Char	Must contain the same value as in the original order.
44	Price	N		Price	New Order price. If it's being unchanged, must contain the same value as in the original order.
99	StopPx	N		Price	New Stop price. Only allowed when OrdType = 4 If it's being unchanged, must contain the same value as in the original order.
	Start <TriggeringInstruction>				
1100	TriggerType	N	4 = Price Movement	char	Must contain the same value as in the original order.
1107	TriggerPriceType	N	1 = Best Offer 2 = Last Trade	char	Triggering Instruction for the Stop limit order.

Tag	Name	Req	Valid values	Format	Description
			3 = Best Bid		If it's being unchanged, must contain the same value as in the original order.
			4 = Best Bid or Last Trade		
			5 = Best Offer or Last Trade		The <TriggeringInstruction> block will not be present in segments where there is only one type of stop order, that is, in financial derivatives.
			6 = Best Mid Bid-Offer		
	End <TriggeringInstruction>				
59	TimeInForce	N	See 'MEFF Order Types' chapter	Char	Must contain the same value as in the original order
432	ExpireDate	N		LocalMktDate	New date of order expiration (last day the order can trade). Only allowed when TimeInForce [59] = GTD. If it's being unchanged, must contain the same value as in the original order.
58	Text	N		String(15)	New order reference given by client. If it's being unchanged, must contain the same value as in the original order. If not specified, HF MEFFGate will initialize it with an empty string.
1724	OrderOrigination	N	5 = Order received from a direct access or sponsored access customer	Int	DEA order flag If it's being unchanged, must contain the same value as in the original order
2593	NoOrderAttributes	N		NumInGroup	Liquidity provision flag
→2594	OrderAttributeType	N	2	String	If it's being unchanged, must contain the same value as in the original order Liquidity provision flag
→2595	OrderAttributeValue	N	Y	String	If it's being unchanged, must contain the same value as in the original order
29	LastCapacity	N	1 = "AOTC"	Char	Trading capacity

Tag	Name	Req	Valid values	Format	Description
			3 = "MTCH"		
			4 = "DEAL"		
2667*	AlgorithmicTradeIndicator	N	1 = Algorithmic (submitted by a trading algorithm)	Int	Algorithmic order flag If it's being unchanged, must contain the same value as in the original order
	Standard Trailer	Y			



## 7.9.4 Execution Report (Msg Type = 8)

Message sent by HF MEFFGate to notify the status of an order, including if the order is filled or partially filled; also used to reject an invalid order request.

All the trades, including the cross trades, are informed with an Execution Report message where the field ExecType [150] = "F" (Trade).

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 8		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
					Unique order identifier, assigned by HF MEFFGate or QuoteID sent by client in a quote.
37	OrderID	Y		String	When ExecType [150] = 8 (Rejected), H (Trade Cancel), G (Trade Correct), E (Pending Replace) or 6 (Pending Cancel) it contains "NONE"
					For orders entered from the Order Entry Server it contains "NONE".
198	SecondaryOrderID	N		String	Order identifier, assigned by central system of MEFF or another exchange
527	SecondaryExecID	N		String	Order history number, assigned by central system of MEFF or another exchange. Each time there is a new event in the life of the order (modification, trade or cancellation) is assigned a new value to this field.
11	ClOrdID	N		String	ClOrdID (see 4.1.1) sent by client. Only included if this message is related to an order
41	OrigClOrdID	N		String(30)	OrigClOrdID sent by client. Only provided when the related message is a cancellation or modification request
790	OrdStatusReqID	N		String	It contains the same value as specified in the related Order Status Request.  Only filled if the Execution Report is a consequence of an Order Status Request.
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N		String	See section 4.3 - Parties block

Tag	Name	Req	Valid values	Format	Description
→447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  1 = Executing Firm  3 = Client ID  7 = Entering Firm (intermediary)  11 = Order Origination Trader  12 = Execution within Firm ID  13 = Order Origination Firm  36 = Entering Trader (intermediary)  43 = Internal Carry Account  59 = Executing Trader  96 = Take-up Trading Firm  122 = Investment Decision within Firm ID	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
→452	PartyRole	N		Int	Indicates the role taken by the code specified in PartyID.
End <Parties>					
548	CrossID	N		String	For cross trades contains the value of the field SecondaryTradeReportID [818] in the Trade Capture Report message.  For RFQ contains the value of the field QuoteID [117] (Conversation ID) in the Quote Response message.
880	TrdMatchID	N		String	Trade registration number. Identifier of partial fill or filled order, assigned by central system of MEFF or another exchange.
17	ExecID	Y		String	Provided when ExecType [150] = "F" (Trade), "H" (Trade Cancel) or "G" (Trade Correct).  Unique identifier of Execution Report assigned by HF MEFFGate

Tag	Name	Req	Valid values	Format	Description
19	ExecRefID	N		String	Trade registration number (TrdMatchID) of the cancelled trade or amended trade.  In leg trades It includes the trade registration number of the strategy trade.
150	ExecType	Y	0 = New 4 = Cancelled 5 = Replace 6 = Pending Cancel 8 = Rejected A = Pending New C = Expired D = Restated E = Pending Replace F = Trade G = Trade Correct H = Trade Cancel I = Order Status L = Triggered	Char	Indicates the status of the associated message, whereas OrdStatus [39] provides the current order status.  If cancelled (value 4) or rejected (value 8), there is an explanation in the RejectText [1328] field.
39	OrdStatus	Y	0 = New 1 = Partially Filled 2 = Filled 4 = Cancelled 6 = Pending Cancel 8 = Rejected A = Pending New E = Pending Replace	Char	Indicates the current status of the order
103	OrdRejReason	N	See codification table 20	Int	Rejection or cancellation motive.  It can be provided when ExecType [150] = 4 or 8.

Tag	Name	Req	Valid values	Format	Description
1328	RejectText	N		String	If ExecType [150] = 8 (Rejected) or 4 (Cancelled) there is an explanation of the rejection or cancellation
378	ExecRestatement Reason	N	1 = Renewal / Restatement	int	Code to identify reason for an ExecutionRpt message sent with ExecType [150] = D (Restated).  Used for GTD orders at the start of the day.
2667	AlgorithmicTradeIndicator	N	1 = Algorithmic (submitted by a trading algorithm)	Int	Algorithmic order flag
828	TrdType	N	See table 4 of document "Codification Tables" for details of the Trade Type codes	Int	Trade Type. Only provided when ExecType [150] = "F" (Trade), "H" (Trade Cancel) or "G" (Trade Correct).  This value is used in conjunction with TrdSubType [829].
829	TrdSubType	N	See table 4 of document "Codification Tables" for details of the Trade Type codes	Int	This value is used in conjunction with TrdType [828]
1	Account Start <PreAllocGrp>	N	Fixed length	String(5)	Position account
78*	NoAllocs	N		NumInGroup	
→ 79*	AllocAccount	N	[N/A]	String	Always [N/A]
→ 1729*	FirmMnemonic	N		String (10)	Give-out mnemonic
→ 161*	AllocText	N		String (18)	Give-up reference
→ 1732*	FirmAllocText	N		String (18)	Reference assigned by the Executing Broker for internal purposes.  It is associated to a Give-out mnemonic and it can be not unique. Need not be provided.
	End <PreAllocGrp>				
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Contract code associated with order
48	SecurityID	N		String(12)	ISIN security code
22	SecurityIDSource	N	4 = ISIN Number	String	
	End <Instrument>				
54	Side	Y	1 = Buy 2 = Sell	Char	
	Start <Stipulations>				

Tag	Name	Req	Valid values	Format	Description
232	NoStipulations	N	LATENCY = Indicator of having been in latency protection  MMTL31 = Level 3.1 - Transaction category MMT model	NumInGroup	
→233	StipulationType	N	PTF = Post-transparency flags  RTS24_21 = Event according to field 21 RTS 24  RETAIL = Retail Client Indicator	String	When StipulationType [233] = LATENCY, the valid values are: Y = Yes. The order, or the negotiation of the order or the negotiation of the quote side (buy or sell) has been in latency protection. N = No (default). The order, or the negotiation of the order or the negotiation of the quote side (buy or sell), has not been in latency protection.  If this field is not reported it means that the order, or the negotiation of the order or the negotiation of the quote side (buy or sell), has not been in latency protection.
→ 234	StipulationValue	N		String	When StipulationType [233] = MMTL31, it contains Level 3.1 - Transaction category MMT model: Z = Package Trade (excluding Exchange for Physicals) "TPAC" Y = Exchange for Physicals Trade "XFPH"  When StipulationType [233] = PTF, it contains the trade post-transparency flags accordingly MiFID II directive. Different flags are enclosed by doubled quotes (") and separated by a comma  When StipulationType=RTS24_21:

Tag	Name	Req	Valid values	Format	Description
					NEWO – New order REME – Replaced by initiative of message receiver REMA – Replaced by Market Surveillance (automatic) REMH – Replaced by Market Surveillance (manual) CAME – Cancellation by initiative of message receiver CAMO – Cancellation by Surveillance REMO – Rejection EXPI – Order expired PARF – Partial fill FILL – Filled CHME – Change of status at the initiative of the member/participant of the trading venue CHMO – Change of status due to market operations TRIG – Order triggered
	End <Stipulations>				
	Start <OrderQtyData>				
38	OrderQty	N		Qty	Total Order volume, as indicated in the New Order message, or in the modification message
	End <OrderQtyData>				
40	OrdType	N	See 'MEFF Order Types' chapter	Char	Order type
44	Price	N		Price	Order Price
99	StopPx	N		Price	Stop price of order
	Start <TriggeringInstruction>				
1100	TriggerType	N	4 = Price Movement 1 = Best Offer 2 = Last Trade	char	Triggering Instruction for the Stop limit order.
1107	TriggerPriceType	N	3 = Best Bid 4 = Best Bid or Last Trade 5 = Best Offer or Last Trade	char	If component block <TriggeringInstruction> is not specified then the Stop limit order is triggered at Last Trade.  The <TriggeringInstruction> block will not be present in segments where there is only one type of stop order, that is, in financial derivatives.

When StipulationType [233] = RETAIL, indicates if the order is retail:

- Y = Yes

Tag	Name	Req	Valid values	Format	Description
	End <TriggeringInstruction>		6 = Best Mid Bid-Offer		
15	Currency	N		Currency	Currency code (3 character) values using ISO 3166
59	TimeInForce	N	See 'MEFF Order Types' chapter	Char	Indicates how long order is valid
432	ExpireDate	N		LocalMktDate	Date of order expiration (last day the order can trade)
18	ExecInst	N	n = Not Cancel on connection loss o = Cancel on connection loss	MultipleCharValue (ver 4.5)	Values "n" and "o" are used for the order persistence on connection loss.
1057	AggressorIndicator	N	Y = Order initiator is aggressor N = Order initiator is passive	Char	Passive/Aggressive Indicator
1390	TradePublishIndicator	N	1 = Immediate Publication 2 = Non-Immediate Publication	Int	Level 4.1 - Publication Mode / Post-Trade Deferral Reason MMT model (see also TrdRegPublicationType [2669] + TrdRegPublicationReason [2670])
32	LastQty	N		Qty	Volume on this fill. Provided if OrdStatus [39] = 1 or 2
31	LastPx	N		Price	Price of this fill. Provided if OrdStatus [39] = 1 or 2
1430	VenueType	N	B = Continuous Auction "1" Q = Quote Driven Market "2" D = Dark Order Book "3" O = Off Book (including Voice or Messaging Trading) "4" A = Periodic Auction "5" N = Request for Quotes "6"	Char	Level 1 - Market Mechanism MMT model
1301*	MarketID	N	See table 2 document "Codification Tables"	Exchange	Operating MIC where the trade has been done according to ISO 10383
1300*	MarketSegmentID	N	See table 2 document	String	Segment MIC where the trade has been done according to ISO 10383

Tag	Name	Req	Valid values	Format	Description
			"Codification Tables"		
336	TradingSessionID	N	See table 25 document "Codification Tables"	String	Trading mode. Provided if OrdStatus [39] = 1 or 2
29	LastCapacity	N	1 = "AOTC" 3 = "MTCH" 4 = "DEAL"	Char	Trading capacity
151	LeavesQty	Y		Qty	Order volume pending Contains 0 when OrdStatus [39] = 4 (Cancelled) or 6 (Pending Cancel) Total order volume filled
14	CumQty	Y		Qty	This field should not be considered when zero
60	TransactTime	N		UTCTimest amp	Time when transaction represented by this Execution Report occurred. Not present when ExecType [150] = 6, A or E
381	GrossTradeAmt	N		Amt	Effective amount of this trade. Present when ExecType [150] = "F" (Trade), "G" (Trade Correct) or "H" (Trade Cancel)
2362	SelfMatchPreventionID	N	Numeric, > 0, <= 65.535	String	Self-Match prevention
21506*	SelfMatchPreventionType	N	1 - reject aggressive order (default) 2 - reject passive order 3 - reject both orders: aggressive and passive	String	Self-Match prevention type. Indicates the behavior to follow when applying the Self-Match Prevention mechanism.
77	PositionEffect	N	O=Open C=Close	Char	Indicates whether the resulting position after a trade should be an opening position or closing position. Only applies to the omnibus accounts.
58	Text	N		String	It contains the client order reference, entered in the Text field of the order message
442	MultiLegReportingType	N	1=Single Security 2=Individual leg of a multi-leg security 3=Multi-leg security	Char	Indicates whether the trade refers to a single contract a time-spread or strategy, or the leg of a time spread or strategy.
1724	OrderOrigination	N	5 = Order received from a direct access	Int	DEA order flag



Tag	Name	Req	Valid values	Format	Description
	Start <TrdRegTimestamps>		or sponsored access customer		
768	NoTrdRegTimestamps	N		NumInGroup	
					When TrdRegTimestampType [770] = 1, it contains the trade execution time
					When TrdRegTimestampType [770] = 8, it contains the date and time every time the priority of the order changes
→769	TrdRegTimestamp	N		UTCTimestamp	When TrdRegTimestampType [770] = 8, it contains the date at which the order has been accepted by the central system. Not present when ExecType [150] = 6, A or E
					When TrdRegTimestampType [770] = 11, it contains the date and time publicly reported of the trade
			1 = Execution time		
			8 = Time priority		
→770	TrdRegTimestampType	N	9 = OrderBookEntryTime	Int	
			11 = Publicly reported		
	End <TrdRegTimestamps>				
	Start <OrdAttrib>				
2593	NoOrderAttributes	N		NumInGroup	
→2594	OrderAttributeType	N	2 = Liquidity provision flag 3 = Risk reduction order	String	
→2595	OrderAttributeValue	N		String	When OrderAttributeType [2594] = 2, indicates a Liquidity provision activity order. Valid values: Y = In the context of ESMA RTS 24 Article 3, when OrderAttributeValue(2595)=Y, it signifies that the order was submitted "as part of a market making strategy pursuant to Articles

Tag	Name	Req	Valid values	Format	Description
	End <OrdAttrib>				17 and 18 of Directive 2014/65/EU, or is submitted as part of another activity in accordance with Article 3" (of RTS 24) When OrderAttributeType [2594] = 3, indicates a Risk reduction order. Valid values: Y = In the context of ESMA RTS 22 Article 4(2)(i), when OrderAttributeValue(2595)=Y, it signifies that the commodity derivative order is a transaction "to reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU" N = The commodity derivative order does NOT reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU"
	Start <TrdRegPublicationGrp>				
2668	NoTrdRegPublications	N		NumInGroup	
→ 2669	TrdRegPublicationType	N	0 = Pre-trade transparency waiver 1 = Post-trade deferral	Int	Value 0: Level 3.2 - Negotiation Indicator or Pre-trade Transparency Waiver MMT model (see also TrdRegPublicationReason [2670]) Value 1: Level 4.1 - Publication Mode / Post-Trade Deferral Reason MMT model (see also TradePublishIndicator [1390] + TrdRegPublicationReason [2670])
					Maybe present if MDEntryType is 2
→ 2670	TrdRegPublicationReason	N	6 = Non-Immediate Publication: Deferral for "Large in Scale" "LRGS" 7 = Non-Immediate Publication: Deferral for "Illiquid Instrument" (RTS 2 only) "ILQD" 8 = Non-Immediate Publication: Deferral for "Size Specific" (RTS 2 only) "SIZE"	Int	Values 6, 7 and 8: Level 4.1 - Publication Mode / Post-Trade Deferral Reason MMT model (related to TradePublishIndicator [1390] = 2 and TrdRegPublicationType [2669] = 1)
	End				

Tag	Name	Req	Valid values	Format	Description
	<TrdRegPublicationGrp>				
	Start <TradePriceConditionGrp>				
1838	NoTradePriceConditions	N		NumInGroup	
→1839	TradePriceCondition	N	15 = Non-Price Forming Trade (formerly defined as a Technical Trade) "NPFT"	Int	Level 3.8 - Ordinary/Standard Trades or Trades Outside Price Formation / Discovery Process MMT model
	End <TradePriceConditionGrp>				
	Start <ClrInstrGrp>				
576*	NoClearingInstructions	N	1	NumInGroup	
→577*	ClearingInstruction	N	6 = Trade for the ECC (Clear against central counterparty) 7 = Exclude from central counterparty	Int	Transaction to be cleared on a CCP
	End <ClrInstrGrp>				
			11 = Limited details trade "LMTF"		
			12 = Daily aggregated trade "DATF"		
			13 = Volume omission trade "VOLO"		
1934*	RegulatoryReportType	N	14 = Four weeks aggregation trade "FWAF" 15 = Indefinite aggregation trade "IDAF" 16 = Volume omission trade. Eligible for subsequent enrichment in aggregated form "VOLW"	Char	Level 4.2 - Post-Trade deferral or Enrichment MMT model

Tag	Name	Req	Valid values	Format	Description
277*	TradeCondition	N	6 = Benchmark Trade "BENC"	MultipleSt ringValue	Level 3.5 - Benchmark or Reference Price Indicator indicator MMT model
	Standard Trailer	Y			

## 7.9.5 Order Cancel Reject (Msg Type = 9)

Message sent by HF MEFFGate to reject an order modification or cancellation message.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = 9		
37	OrderID	Y	See 4.1.2	String	OrderID associated to order. It is "NONE" if CxlRejReason = 1 (Unknown order)
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	See section 4.3 - Parties block
→ 447	PartyIDSource	N	D = Proprietary/ Custom code	Char	Required if NoPartyIDs is specified
→ 452	PartyRole	N	13 = Order Origination Firm  11 = Order Origination Trader	Int	Indicates the role taken by the code specified in PartyID. Required if NoPartyIDs is specified
	End <Parties>				
11	ClOrdID	Y		String(30)	ClOrdID of rejected message
41	OrigClOrdID	Y		String(30)	ClOrdID of order that could not be modified or cancelled. Contains the same value as OrigClOrdID of the cancellation or modification request message
			0 = New		
			1 = Partially Filled		
			2 = Filled		
			4 = Cancelled		
			8 = Rejected		
			C = Expired		
39	OrdStatus	Y		Char	Order status. It is 8 (Rejected) if CxlRejReason = 1 (Unknown order)
60	TransactTime	N		UTC Timestamp	Time rejection message generated
			1 = Order Cancel Request		
434	CxlRejResponseTo	Y	2 = Order Cancel/Replace Request	Char	Type of message responded to
			0 = Too late to cancel		
			1 = Unknown order		
			2 = Exchange option		
			3 = Order already in Pending Cancel or		
102	CxlRejReason	N		Int	Rejection motive. If value is 99 there is an explanation in the RejectText [1328] field

Tag	Name	Req	Valid values	Format	Description
			Pending Replace status		
			6 = Duplicate CIOrdID received		
			99=other		
1328	RejectText	N		String	Explanation of rejection
	Standard Trailer	Y			

## 7.9.6 Order Status Request (Msg Type = H)

Message sent by the client to request information on the status of a specific order.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = H		
11	ClOrdID	Y		String(30)	ClOrdID of the order for which status is required
790	OrdStatusReqID	Y*		String(10)	Message identifier
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Must contain the same value as the order queried
	End <Instrument>				
54	Side	Y	1 = Buy 2 = Sell	Char	Must contain the same value as the order queried
	Standard Trailer	Y			

### 7.9.7 Order Mass Cancel Request (Msg Type = q)

Message sent by the client to request the cancellation of orders that meet certain selection criteria.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = q		
11	ClOrdID	Y		String(30)	Unique identifier of this Order Mass Cancel Request message
530	MassCancelRequestType	Y	7 = Cancel all orders that match criteria	Char	Cancel orders that meet the selection criteria
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	See section 4.3 - Parties block
→ 447	PartyIDSource	N	D = Proprietary/ Custom code	Char	Required if NoPartyIDs is specified
→ 452	PartyRole	N	13 = Order Origination Firm  11 = Order Origination Trader	Int	Indicates the role of the code specified in PartyID. Required if NoPartyIDs is specified
	End <Parties>				
	Start <Instrument>				
55	Symbol	Y	[N/A] or contract code	String(22)	Contract code. If it is "[N/A]" the orders for all contracts matching the rest of criteria will be selected
48	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
22	SecurityIDSource	N	8 = Exchange Symbol	String	Required if SecurityID is specified
167	SecurityType	N	See table 6 of document "Codification Tables"	String	Product type
200	MaturityMonthYear	N	YYYYMM, YYYYMMDD or YYYYMMWW	Month-Year	Contract expiration
	End <Instrument>				
54	Side	N	1 = Buy  2 = Sell	Char	Selection criteria for buy or sell orders
60	TransactTime	Y		UTC Timestamp	Time order request was made
1*	Account	N	Fixed length	String(5)	Account code. The use of the wildcard "?" for multiple selection is only



Tag	Name	Req	Valid values	Format	Description
					permitted in the five positions at a time or in the last two positions. In the later case it must be used in both at the same time
	Standard Trailer	Y			

## 7.9.8 Order Mass Cancel Report (Msg Type = r)

Message responding to a mass order cancellation request. It notifies whether the request is accepted or rejected. To ensure that the cancellations have been processed, it is necessary to wait until the corresponding Execution Reports are received.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = r		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
11	ClOrdID	N		String(30)	ClOrdID specified in the Order Mass Cancel Request message
37	OrderID	Y		String	Unique identifier for the Order Mass Cancel Request message assigned by MEFF
530	MassCancelRequestType	Y	7	Char	Contains the same value as specified in request
531	MassCancelResponse	Y	0 = Cancel Request Rejected 7 = Cancel all orders that match criteria	Char	7 if the cancellation is accepted. 0 if rejected. If it is 0, the MassCancelRejectReason field gives the rejection motive
532	MassCancelRejectReason	N	1 = Invalid or unknown Security 99 = other	String	Rejection motive. Provided if MassCancelResponse = 0. If value is 99, there is an explanation of the rejection motive in the RejectText [1328] field
1328*	RejectText	N		String	Explanation of rejection motive
	Standard Trailer	Y			

## 8 Strategies

### 8.1 Introduction

Every strategy is defined by the FIX client through a Security Definition Request message. Leg contract code, which provides the identification of the legs, their ratios and side, are mandatory attributes of the request.

HF MEFFGate validates the user request and, if valid, creates a tradeable instrument that is sent to the FIX client through this private interface data via a Security Definition message and, also, disseminated to the whole market participants through the HF MEFFGate public interface data via a Security List Update Report message.

Once the strategy has been successfully created, it is possible to enter orders via a New-Order – Single message.

All strategies are cancelled at the end of the trading session. If, at the next trading session, the FIX client wishes to trade a new strategy, it should first define a new strategy in the same way explained above.


### 8.2 List of messages

Message	Description
Security Definition Request (Msg Type = c)	Message sent by the HF MEFFGate client to create a new strategy instrument
Security Definition (Msg Type = d)	Message sent by HF MEFFGate to accept or reject a Security Definition Request message


### 8.3 Message flow

#### Security Definition Request accepted by HF MEFFGate followed by a strategy order entry

(In this example, for illustrative purposes, public messages are gray shaded. These messages can be received from the public data interface of HF MEFFGate).

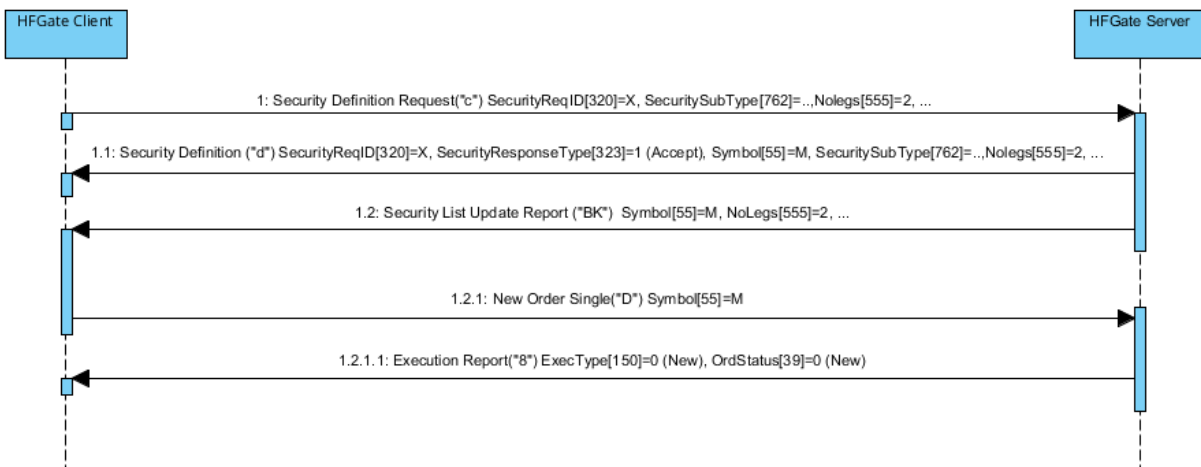

## Security Definition Request rejected by HF MEFFGate

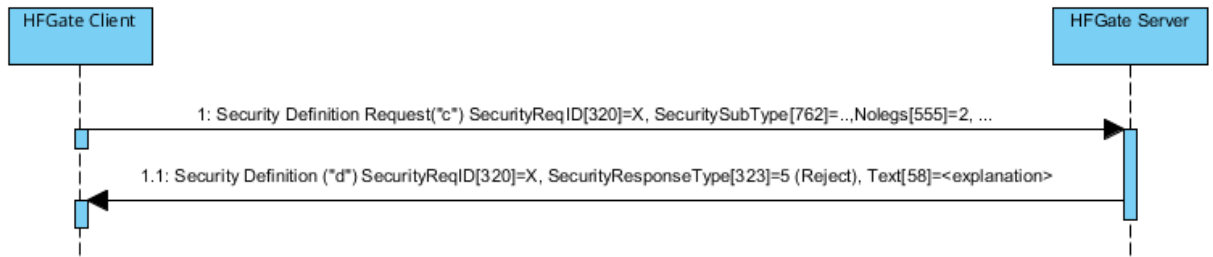

### 8.4 Annotations and adaptations of FIX 5.0

In the Security Definition Request message, the SecurityID [48] and SecuritySubType [762] fields are now required

## 8.5 Definition of messages

### 8.5.1 Security Definition Request (Msg Type = c)

Message sent by the HF MEFFGate client to create a new strategy instrument

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = c		
320	SecurityReqID	Y		String (10)	Identifier for this Security Definition Request message
321	SecurityReqType	Y	1 = Request security identity for the specifications provided	String	Value must = 1
	Start <Instrument>				
→48	SecurityID	Y*	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
762	SecuritySubType	Y*	See table 9 in document "Codification Tables" for a list of possible values	String	Strategy type
	End <Instrument>				
555	NoLegs	N		NumInGroup	
	Start <InstrumentLeg>				
→600	LegSymbol	N		String(22)	Leg contract code
→623	LegRatioQty	N		Float	The ratio of quantity for this individual leg relative to the entire multileg security
→624	LegSide	N	1 = Buy 2 = Sell	Char	Indicates if the contract LegSymbol [600] is to buy or sell
→566	LegPrice	N		Price	Price for this leg
	End <InstrumentLeg>				
	Standard Trailer	Y			

## 8.5.2 Security Definition (Msg Type = d)

Message sent by HF MEFFGate to to accept or reject a Security Definition Request message

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = d		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
320	SecurityReqID	N		String	Identifier assigned by the client in the Security Definition Request message
323	SecurityResponseType	N	1 = Accept 5 = Reject	Int	Status of the Security Definition Request message. If it contains the value "5" (Reject), there is an explanation for the rejection in the RejectText [1328] field.
	Start <Instrument>				
→55	Symbol	N		String	Security code for this strategy
→48	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
762	SecuritySubType	N	See table 9 in document "Codification Tables" for a list of possible values	String	Strategy type
	End <Instrument>				
58	Text	N		String	Long name for this strategy
555	NoLegs	N		NumInGroup	
→	Start <InstrumentLeg>				
→600	LegSymbol	N		String	Leg contract code
→623	LegRatioQty	N		Float	The ratio of quantity for this individual leg relative to the entire multileg security
→624	LegSide	N	1 = Buy 2 = Sell	Char	Indicates if the contract LegSymbol [600] is to buy or sell
→566	LegPrice	N		Price	Price for this leg
	End <InstrumentLeg>				

Tag	Name	Req	Valid values	Format	Description
1328	RejectText	N		String	If SecurityResponseType [323] = "5" (Reject), there is an explanation of the rejection
	Standard Trailer	Y			

## 9 Delta Protection, Kill Button, Management of Filters and Permissions

### 9.1 Introduction

This chapter covers these functions:

- Delta Protection + account configuration and MiFiD II tags for quotes
- Kill Button
- Management of Price Filters
- Management of Volume Filters
- Management of Volume Filters for HFT – IFTL (Maximum variation of the position)
- Management of Permissions

All these features are implemented through the use of Registration Instructions and Registration Instructions Response messages. In these messages the field RegistID is relevant, which is dedicated the next section.

There is a separate section on each of these functions in this chapter. There is a description of the method of use, the list of related messages, the message flow and the additions or annotations incorporated in this implementation for each function. At the end of the chapter there is a detailed description of all the messages included in the chapter.

### 9.2 RegistID

The field RegistID, present in a request initiated by a Registration Instructions message, is the identifier that relates to the request with Registration Instructions Response messages.

The field RegistID assigned by the client should be ten characters length. If length is inferior, HF MEFFGate complete with spaces to achieve that length. HF MEFFGate also expects that messages sent by the client system use an RegistID of 30 length, in this case only the last ten positions are free, since the 20 first should coincide with the format explained below.


A process in the HF MEFFGate of assigning a prefix to the RegistID field is performed to avoid duplicates in this identifier.

The RegistID assigned by MEFFGate in the reply message has the format YYMMDDmmmmmtttmmmmtttnnnnnnnnnn, made by the following codes:

- **YYMMDD**. It is the date of the business session
- **mmmmmttt**. Contains the member and user code of connection from which the request was made
- **nnnnnnnnnn**. It is the value assigned by the client application to RegistID in the original message

A user who wants to send a modification or cancellation, must use this identifier in the field RegistRefID of the Registration Instructions request message.



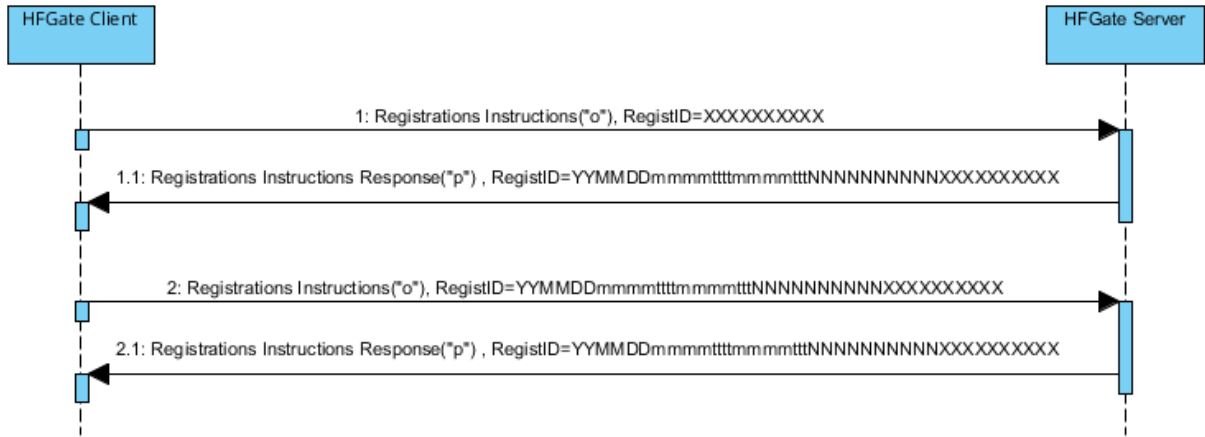

### 9.3 Delta protection + Account configuration and MiFiD II tags for quotes

Each FIX client can activate this protection for its quotes and orders, for a contract group, as follows:

- Time period considered for delta protection (between 1 and 60 seconds)
- Reasons for cancellation due to delta protection. Three limits, which act independently, can be configured during an established time period:
- Total volume of traded contracts
- Delta:
  - Options:  $\text{abs}[\text{Volume of (Calls buy + Puts sell)} - (\text{Calls sell} + \text{Puts buy})]$
  - Futures:  $\text{abs}[\text{Volume of (Futures buy)} - \text{Futures sell}]$
  - $\text{abs}[\text{Total buy volume} - \text{Total sell volume}]$

Contract groups can be defined as:

In Equity Derivatives with a single stock or index as an underlying: there is a contract group for each underlying and contract type (futures, options or strategies)

In xRolling FX derivatives: all of the currency pairs together constitute one single contract group

When a value zero is configured, MEFF central system will not control this specific concept.

If the trader does not wish to activate delta protection, the "period of time for delta protection" parameter has to be configured with the value zero.

After each trade, a check is performed to ascertain if the aggregated volume on 'M' type trades during the last n seconds (as defined in the corresponding parameter) for the trader, underlying asset, contract type and account equals or exceeds any of the three controls defined in the delta protection.

Once the delta protection filter has been triggered the delta protection parameters are deactivated and all trader's pending orders and quotes on this underlying asset, contract type and account are cancelled.

In order to protect from executions on the fly, no new orders or no new quotes on this underlying asset and contract type will be admitted, until the HF MEFFGate client sends a new Registration Instructions message, message type "o", reactivating the limits with `RegistTransType [514] = 1` (Replace). Sending this message implies setting to zero the trade volume counters in the corresponding underlying asset and contract type. Note that it is also possible to cancel the existing, deactivated parameters, with `RegistTransType [514] = 2` (Cancel) and then register new parameters in the usual way.

It must be taken into account that during auction resolution the delta protection feature doesn't apply.

These are the MiFiD II tags which can be configured:

- Client identification (PartyRole [452] with value 3)


- Party responsible for the investment decision within Firm (PartyRole [452] with value 122)
- Party responsible for the Execution within Firm (PartyRole [452] with value 12)
- DEA order flag (OrderOrigination [1724])
- Liquidity provision flag (OrderAttributeType [2594] = 2 + OrderAttributeValue [2595] = "Y")
- Trading capacity (LastCapacity [29])
- Self-Match prevention (SelfMatchPreventionID [2362])
- Self-Match prevention type (SelfMatchPreventionType [21506])

### 9.3.1 List of messages


Message	Description
Registration Instructions (Msg Type = o)	Used by the client to manage the configuration of the quote account parameters and MiFiD II tags and delta protection
Registration Instructions Response (Msg Type = p)	Sent by HF MEFFGate to notify or reject the configuration of the quote account parameters MiFiD II tags and delta protection

### 9.3.2 Message flow

#### Correct request

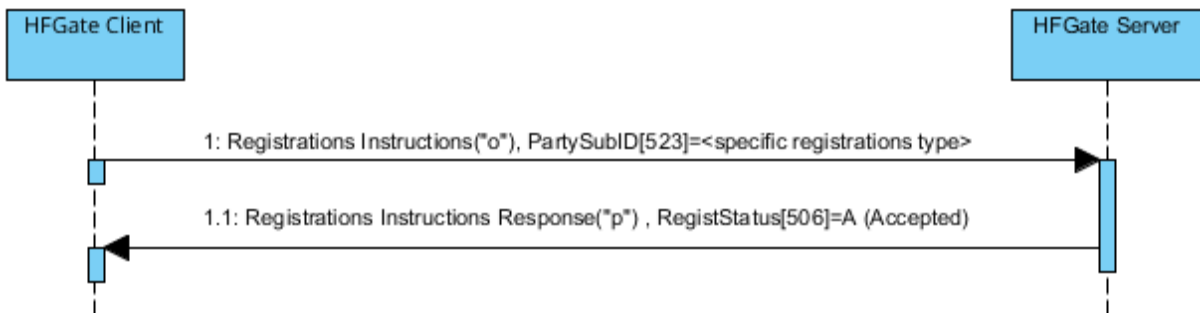

#### Incorrect request

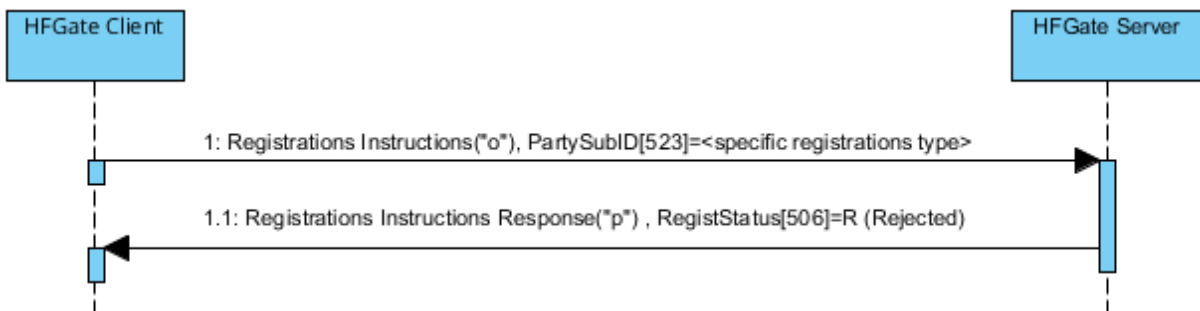

### 9.3.3 Annotations and adaptations of FIX 5.0

In the Registration Instructions message, the fields Account [1], SecurityType [167], NoPartyIDs [453] and NoPartySubIDs [802] are now required

The field RejectText [1328] has been added to the Registration Instructions Response message

The fields OrderOrigination [1724], OrderAttributeType [2594], OrderAttributeValue [2595] and LastCapacity [29] have been added to the Registration Instructions and Registration Instructions Response messages

The blocks Instrument and Stipulations have been added as required to the Registration Instructions message

The blocks Instrument and Stipulations have been added to the Registration Instructions Response message

The field AlgorithmicTradeIndicator [2667] has been added to the Registration Instructions and Registration Instructions Response messages

Added SelfMatchPreventionID [2362] field and optional user field SelfMatchPreventionType [21506] to Registration Instructions and Registration Instructions Response message

### 9.3.4 Registration Instructions (Msg Type = o) Quote Order Parameters

Message sent by the client to manage the configuration of the quote account parameters and MiFiD II tags and delta protection

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = o		
513	RegistID	Y	0 = New	String	Unique identifier for each Registration Instructions message
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Reference identifier for the RegistID (513) with Cancel and Replace RegistTransType (514) transaction types. Required if RegistTransType = 1 or 2
Start <Parties>					
453	NoPartyIDs	Y*		NumInGroup	
→ 448	PartyID	Y*	For PartyRole [452] = 3, 12 or 122, this is an unsigned integer field, greater or equal than 0 and less than 232	String	See section 4.3 - Parties block
→ 447	PartyIDSource	Y*	D = Proprietary/ Custom code P = Short code identifier 3 = Client ID  11 = Order Origination Trader  12 = Execution within Firm ID	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
→ 452	PartyRole	Y*	13 = Order Origination Firm  122 = Investment Decision within Firm ID  See "4.3 - Parties block" for more details	Int	

Tag	Name	Req	Valid values	Format	Description
→ 802	NoPartySubIDs	Y*	1	NumInGroup	
→→ 523	PartySubID	Y*	DELTA = Delta protection and configuration of the quote account parameters	String	
End <Parties>					
1	Account	Y*		String (5)	Account to be applied for the next quotes of futures or options of this underlying asset for this Member-Trader (Order Origination Firm-Order Origination Trader)
Start <Instrument>					
55*	Symbol	Y	[N/A]	String	
48*	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset Mandatory for Equity Derivatives
22*	SecurityIDSource	N	8 = Exchange Symbol	String	Mandatory for Equity Derivatives
167*	SecurityType	N	See table 6 of document "Codification Tables" for details of the Trade Type codes		Product type Mandatory for Equity Derivatives
End <Instrument>					
Start <Stipulations>					
232*	NoStipulations	Y*		NumInGroup	
→ 233*	StipulationType	Y*	TIMEDP = Period of time for delta protection  VOLUMETOT = Total volume of traded contracts  DELTA = Resultant delta  BAL = Resultant net balance (buy-sell)	String	
→ 234*	StipulationValue	Y*	A numeric value, >= 0, no decimals	String	StipulationType = "TIMEDP". This refers to the period of time to be applied for delta protection controls

Tag	Name	Req	Valid values	Format	Description
					taking into account the futures and options of this underlying asset for this Member-Trader code (Order Origination Firm-Order Origination Trader). This is a value expressed in seconds (>1, <=60). If no control has to be applied, this field has to be filled with a 0 (zero).
					StipulationType = "VOLUMETOT". This refers to the total volume of traded contracts accumulated in the period of time established. These contracts correspond to the futures and options of this underlying asset and traded by this Member-Trader code (Order Origination Firm-Order Origination Trader). If no control has to be applied, this field has to be filled with a 0 (zero).
					StipulationType = "DELTA". This refers to the resultant delta accumulated in the period of time established, for futures and options of this underlying asset and traded by this Member-Trader code (Order Origination Firm-Order Origination Trader). If no control has to be applied, this field has to be filled with a 0 (zero).
					StipulationType = "BAL". This refers to the resultant net balance (buy-sell) accumulated in the period of time established, for futures and options of this underlying asset and traded by this Member-Trader code (Order Origination Firm-Order Origination Trader). If no control has to be applied, this field has to be filled with a 0 (zero).
End <Stipulations>					
1724*	OrderOrigination	N	5 = Order received from a direct access or sponsored access customer	Int	DEA order flag
Start <OrdAttrib>					
2593*	NoOrderAttributes	N		NumInGroup	
→2594*	OrderAttributeType	N	2	String	Liquidity provision flag
→2595*	OrderAttributeValue	N	Y	String	Liquidity provision flag

Tag	Name	Req	Valid values	Format	Description
	End <OrdAttrib>		1 = "AOTC"		
29*	LastCapacity	N	3 = "MTCH"	Char	Trading capacity
			4 = "DEAL"		
2667*	AlgorithmicTradeIndicator	N	1 = Algorithmic (submitted by a trading algorithm)	Int	Algorithmic order flag
2362*	SelfMatchPreventionID	N	Numeric, > 0, <= 999	String	Self-Match prevention
			1 - reject aggressive order (default)		
21506*	SelfMatchPreventionType	N	2 - reject passive order	String	Self-Match prevention type. Indicates the behavior to follow when applying the Self-Match Prevention mechanism.
			3 - reject both orders: aggressive and passive		
	Standard Trailer	Y			



### 9.3.5 Registration Instructions Response (Msg Type = p) Quote Order Parameters

Message used by HF MEFFGate to indicate the status of the request initiated with the Registration Instructions message of the configuration of the quote account parameters and MiFiD II tags and delta protection

This message is only sent to the user who made the request.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
			0 = New		
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Identifier of Registration Instructions message which is replaced or cancelled by this message. Included when RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	See section 4.3 - Parties block
→ 447	PartyIDSource	N	D = Proprietary/ Custom code P = Short code identifier 3 = Client ID	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
			11 = Order Origination Trader		
→ 452	PartyRole	N	12 = Execution within Firm ID 13 = Order Origination Firm 122 = Investment	Int	

Tag	Name	Req	Valid values	Format	Description
			Decision within Firm ID		
			...		
			See "4.3 - Parties block" for more details		
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	DELTA = Delta protection and configuration of the quote account parameters	String	
→→ 803	PartySubIDType	N		Int	The content of this field should not be considered
	End <Parties>				
1	Account	N		String	Account to be applied for the next quotes of futures or options of this underlying asset for this Member-Trader (Order Origination Firm-Order Origination Trader)
	Start <Instrument>				
55*	Symbol	Y	[N/A]	String	
48*	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
22*	SecurityIDSource	N	8 = Exchange Symbol	String	
167*	SecurityType	N	See table 6 of document "Codification Tables" for details of the Trade Type codes	String	Product type
	End <Instrument>				
	Start <Stipulations>				
232*	NoStipulations	N		NumInGroup	
→ 233*	StipulationType	N	TIMEDP = Period of time for delta protection	String	
			VOLUMETOT = Total volume of		

Tag	Name	Req	Valid values	Format	Description
			traded contracts		
			DELTA = Resultant delta		
			BAL = Resultant net balance (buy-sell)		
					StipulationType = "TIMEDP". This refers to the period of time to be applied for delta protection controls taking into account the futures and options of this underlying asset for this Member-Trader code (Order Origination Firm-Order Origination Trader). This is a value expressed in seconds (>1, <=60). If no control has to be applied, this field has to be filled with a 0 (zero).
					StipulationType = "VOLUMETOT". This refers to the total volume of traded contracts accumulated in the period of time established. These contracts correspond to the futures and options of this underlying asset and traded by this Member-Trader code (Order Origination Firm-Order Origination Trader). If no control has to be applied, this field has to be filled with a 0 (zero).
→ 234*	StipulationValue	N		String	StipulationType = "DELTA". This refers to the resultant delta accumulated in the period of time established, for futures and options of this underlying asset and traded by this Member-Trader code (Order Origination Firm-Order Origination Trader). If no control has to be applied, this field has to be filled with a 0 (zero)
					StipulationType = "BAL". This refers to the resultant net balance (buy-sell) accumulated in the period of time established, for futures and options of this underlying asset and traded by this Member-Trader code (Order Origination Firm-Order Origination Trader). If no control has to be applied, this field has to be filled with a 0 (zero)

Tag	Name	Req	Valid values	Format	Description
	End <Stipulations>				
506	RegistStatus	Y	A = Accepted R = Rejected	Char	Status of the Registration Instructions request message.  If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
1328*	RejectText	N		String	If RegistStatus = "R" there is an explanation of the rejection
1724*	OrderOrigination	N	5 = Order received from a direct access or sponsored access customer	Int	DEA order flag
	Start <OrdAttrib>				
2593*	NoOrderAttributes	N		NumInGroup	
→2594*	OrderAttributeType	N	2	String	Liquidity provision flag
→2595*	OrderAttributeValue	N	Y	String	Liquidity provision flag
	End <OrdAttrib>				
29*	LastCapacity	N	1 = "AOTC" 3 = "MTCH" 4 = "DEAL"	Char	Trading capacity
2667*	AlgorithmicTradeIndicator	N	1 = Algorithmic (submitted by a trading algorithm)	Int	Algorithmic order flag
2362*	SelfMatchPreventionID	N	Numeric, > 0, <= 65.535	String	Self-Match prevention
21506*	SelfMatchPreventionType	N	1 - reject aggressive order (default) 2 - reject passive order 3 - reject both orders: aggressive and passive	String	Self-Match prevention type. Indicates the behavior to follow when applying the Self-Match Prevention mechanism.
	Standard Trailer	Y			

## 9.4 Kill Button

Allows:

Clearing Members (authorised users): Suspend a non-clearing member cleared by the clearing member. The use of this functionality implies the suspension of all the member's traders, the cancellation of pending orders, quotes and block trades pending acceptance.

Non-clearing members (authorised users): Suspend a trader within this non-clearing member. The use of this functionality implies the cancellation of pending orders, quotes and block trades pending acceptance.


The reactivation of member or trader has to be requested from Market Supervision.

### 9.4.1 List of messages


Message	Description
Registration Instructions (Msg Type = o)	Used by the client to send a Kill Button
Registration Instructions Response (Msg Type = p)	Sent by HF MEFFGate to notify or reject the Kill Button request

### 9.4.2 Message flow

#### Correct request

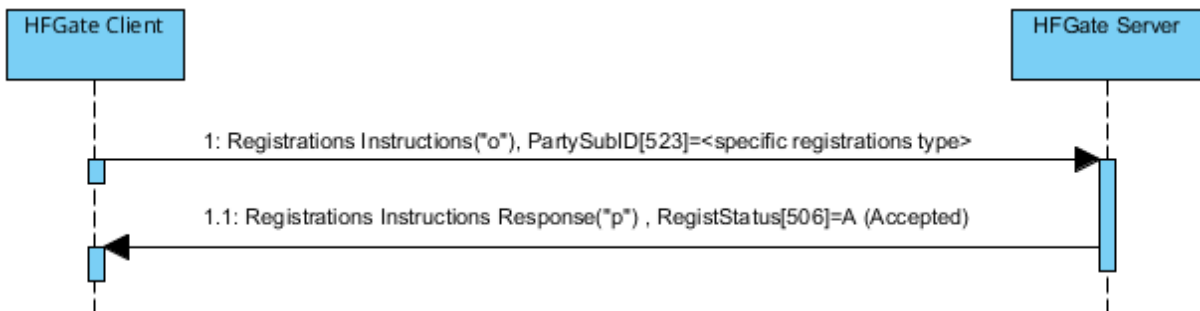

#### Incorrect request

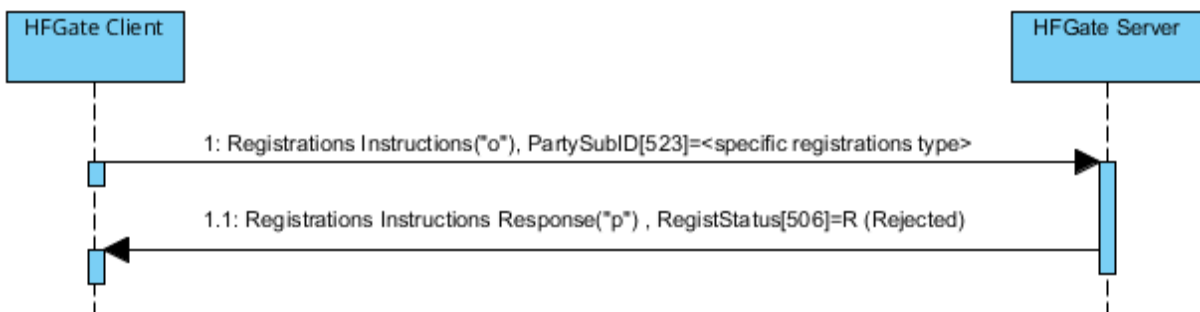

### 9.4.3 Annotations and adaptations of FIX 5.0

In the Registration Instructions message, the fields NoPartyIDs [453] and NoPartySubIDs [802] are now required

The field RejectText [1328] has been added to the Registration Instructions Response message

#### 9.4.4 Registration Instructions (Msg Type = o) for Kill Button

Message sent by the client to send a Kill Button

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = o		
513	RegistID	Y		String	Unique identifier for each Registration Instructions message
514	RegistTransType	Y	0 = New	Char	
508	RegistRefID	N		String	Reference identifier for the RegistID (513) with Cancel and Replace RegistTransType (514) transaction types. Required if RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	Y*		NumInGroup	
→ 448	PartyID	Y*		String	Member / Trader codes which acts this configuration
→ 447	PartyIDSource	Y*	D = Proprietary / Custom code 13 = Order Origination Firm	String	
→ 452	PartyRole	Y*	11 = Order Origination Trader  See "4.3 - Parties block" for more details	Int	
→ 802	NoPartySubIDs	Y*	1	NumInGroup	
→→ 523	PartySubID	Y*	KILL = Kill Button	String	
	End <Parties>				
	Standard Trailer	Y			

### 9.4.5 Registration Instructions Response (Msg Type = p) for Kill Button

Message used by HF MEFFGate to indicate the status of the request initiated with the Registration Instructions message (Kill Button).

This message is only sent to the user who made the request.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
514	RegistTransType	Y	0 = New	Char	
508	RegistRefID	N		String	Identifier of Registration Instructions message which is replaced or cancelled by this message. Included when RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Member / Trader codes which acts this configuration
→ 447	PartyIDSource	N	D = Proprietary / Custom code 13 = Order Origination Firm	String	
→ 452	PartyRole	N	11 = Order Origination Trader  See "4.3 - Parties block" for more details	Int	
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	KILL = Kill Button	String	
→→ 803	PartySubIDType	N		Int	The content of this field should not be considered
	End <Parties>				
506	RegistStatus	Y	A = Accepted R = Rejected	Char	Status of the Registration Instructions request message.  If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field

Tag	Name	Req	Valid values	Format	Description
1328*	RejectText	N		String	If RegistStatus = "R" there is an explanation of the rejection
	Standard Trailer	Y			



## 9.5 Management of Price Filters

Allows Non-clearing Members Members (authorised users), to define a maximum price filter, in an specific underlying and family of products, for each of its traders. This value must always be more restrictive than the default value set by MEFF for the market.

The configuration of this filter, within each underlying and family of products, will be in ticks or as a percentage with a minimum of ticks and will correspond to the maximum price variation of the order with respect to the base price filter in normal and in “fast market” states.


As it is explained in section “3.7 - Synchronisation at application level”, when a client initiates a FIX session (Logon message accepted), it receives the Registration Instructions and Registration Instructions Response messages (which indicates the user’s established price filters and when the user has the relevant permissions, those of the other traders of the entity).

### 9.5.1 List of messages


Message	Description
Registration Instructions (Msg Type = o)	Used by the client to manage the configuration of the Price filters
Registration Instructions Response (Msg Type = p) Registration Instructions Response (Msg Type = p)	Sent by HF MEFFGate to notify or reject the configuration of the Price filters

### 9.5.2 Message flow

#### Correct request of non-clearing member for its own traders (including itself)

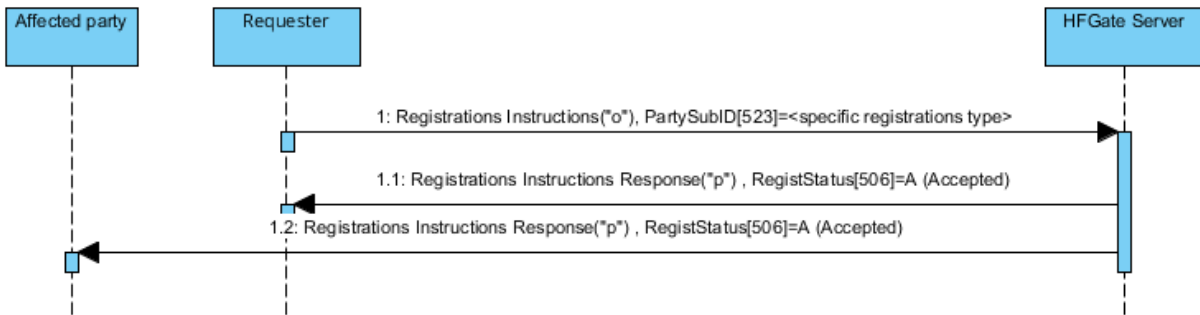

#### Incorrect request

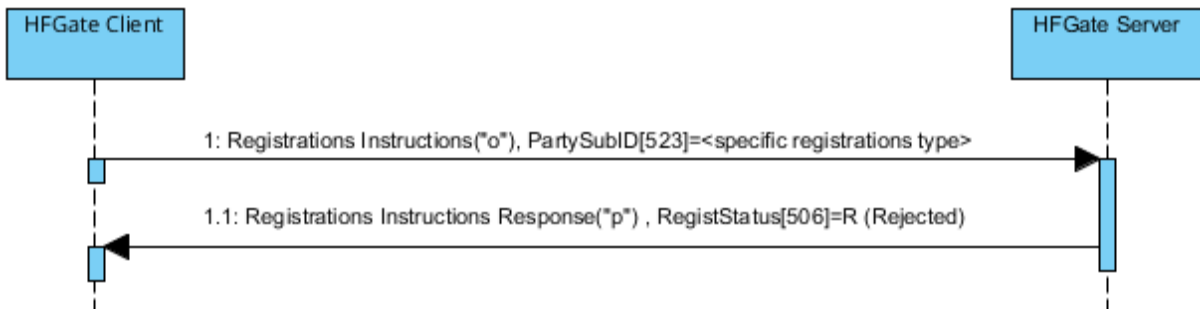

### 9.5.3 Annotations and adaptations of FIX 5.0

In the Registration Instructions message, the fields NoPartyIDs [453] and NoPartySubIDs [802] are now required

The field RejectText [1328] has been added to the Registration Instructions Response message

The blocks Instrument and Stipulations have been added as required to the Registration Instructions message

The blocks Instrument and Stipulations have been added to the Registration Instructions Response message

## 9.5.4 Registration Instructions (Msg Type = o) for Price Filters

Message sent by the client to manage the configuration of the Price filters

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = o		
513	RegistID	Y		String	Unique identifier for each Registration Instructions message
			0 = New		
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Reference identifier for the RegistID (513) with Cancel and Replace RegistTransType (514) transaction types. Required if RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	Y*		NumInGroup	
→ 448	PartyID	Y*		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	Y*	D = Proprietary / Custom code 13 = Order Origination Firm	String	
→ 452	PartyRole	Y*	11 = Order Origination Trader  See "4.3 - Parties block" for more details	Int	
→ 802	NoPartySubIDs	Y*	1	NumInGroup	
→→ 523	PartySubID	Y*	PRICE = Price Filters configuration	String	
	End <Parties>				
	Start <Instrument>				
55*	Symbol	Y	[N/A]	String	
48*	SecurityID	Y*	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
22*	SecurityIDSource	Y*	8 = Exchange Symbol	String	
1151 *	SecurityGroup	Y*	See table 8 in document "Codification Tables" for a list of values	String	Product family
	End <Instrument>				

Tag	Name	Req	Valid values	Format	Description
	Start <Stipulations>				
232*	NoStipulations	Y*		NumInGroup	
			TP = Ticks/Percentage		
			TICKS_N = Maximum price difference to apply in a normal state		
			PERCENT_N = Percentage to apply in a normal state		
→ 233*	StipulationType	Y*	TICKS_F = Maximum price difference to apply for a "fast market" state	String	
			PERCENT_F = Percentage to apply for a "fast market" state		
			TICKMIN = Minimum number of ticks to apply (Configuration by percentage)		
					If StipulationType [233] = "TP", indicates the type of configuration:  "T": Configuration by ticks "P": Configuration by percentage
→ 234*	StipulationValue	Y*		String	If StipulationValue [234] = T (configuration by ticks), it is necessary to implement the number of ticks to apply in a normal state, between the price of the order and the base price filter, in the tag StipulationValue [234] for StipulationType [233] = "TICKS_N". It is necessary to implement as well, for a "fast market" state, the same information in the tag StipulationValue [234] for StipulationType [233] = "TICKS_F".

Tag	Name	Req	Valid values	Format	Description
					<p>If StipulationValue [234] = P (configuration by percentage), it is necessary to implement the percentage to apply in a normal state, between the price of the order and the base price filter, in the tag StipulationValue [234] for StipulationType [233] = "PERCENT_N" and also the minimum number of ticks to apply in the tag StipulationValue [234] for StipulationType [233] = "TICKMIN". It is necessary to implement as well, for a "fast market" state, the same information in the tag StipulationValue [234] for StipulationType [233] = "PERCENT_F" and for StipulationType [233] = "TICKMIN".</p>
	End <Stipulations>				
	Standard Trailer	Y			

### 9.5.5 Registration Instructions Response (Msg Type = p) for Price Filters

Message used by HF MEFFGate to indicate the status of the request initiated with the Registration Instructions message of the Price filters.

This message is sent to the user who made the request and related users affected by the new filter

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
			0 = New		
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Identifier of Registration Instructions message which is replaced or cancelled by this message. Included when RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	N	D = Proprietary / Custom code	String	
			13 = Order Origination Firm		
→ 452	PartyRole	N	11 = Order Origination Trader ... See "4.3 - Parties block" for more details	Int	
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	PRICE = Price Filters configuration	String	
→→ 803	PartySubIDType	N		Int	The content of this field should not be considered
	End <Parties>				

Tag	Name	Req	Valid values	Format	Description
	Start <Instrument>				
55*	Symbol	Y	[N/A]	String	
48*	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
22*	SecurityIDSource	N	8 = Exchange Symbol	String	
1151*	SecurityGroup	N	See table 8 in document "Codification Tables" for a list of values	String	Product family
	End <Instrument>				
	Start <Stipulations>				
232*	NoStipulations	N		NumInGroup	
			TP = Ticks/Percentage		
			TICKS_N = Number of ticks to apply in a normal state		
			PERCENT_N = Percentage to apply in a normal state		
→ 233*	StipulationType	N	TICKS_F = Number of ticks to apply for a "fast market" state	String	
			PERCENT_F = Percentage to apply for a "fast market" state		
			TICKMIN = Minimum number of ticks to apply (Configuration by percentage)		
→ 234*	StipulationValue	N		String	
	End <Stipulations>				

Tag	Name	Req	Valid values	Format	Description
506	RegistStatus	Y	A = Accepted R = Rejected	Char	Status of the Registration Instructions request message.  If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
1328*	RejectText	N		String	If RegistStatus = "R" there is an explanation of the rejection
	Standard Trailer	Y			



## 9.6 Management of Volume Filters

Allows:

Clearing Members (authorised users): Define a maximum order size, in a family of products, for those non-clearing members which it clears. This value must always be more restrictive than the default value set by MEFF for the market. For this feature, value VOL\_C must be used in PartySubID [523] of the Registration Instructions message (see 9.6.4).

Non-clearing Members (authorised users): Define a maximum order size, in a family of products, for each of its traders. This value must always be more restrictive than the default value set by its Clearing Member or by MEFF for the market. For this feature, value VOL\_T must be used in PartySubID [523] of the Registration Instructions message (see 9.6.4).


As it is explained in section “3.7 - Synchronisation at application level”, when a client initiates a FIX session (Logon message accepted), it receives the Registration Instructions and Registration Instructions Response messages (which indicates the user’s established volume filters and when the user has the relevant permissions, those of the other traders of the entity and of the members cleared by the entity).

### 9.6.1 List of messages


Message	Description
Registration Instructions (Msg Type = o)	Used by the client to manage the configuration of the Volume filters
Registration Instructions Response (Msg Type = p)	Sent by HF MEFFGate to notify or reject the configuration of the Volume filters

### 9.6.2 Message flow

**Correct request of clearing member for its own non-clearing members or Correct request of non-clearing member for its own traders (including itself)**

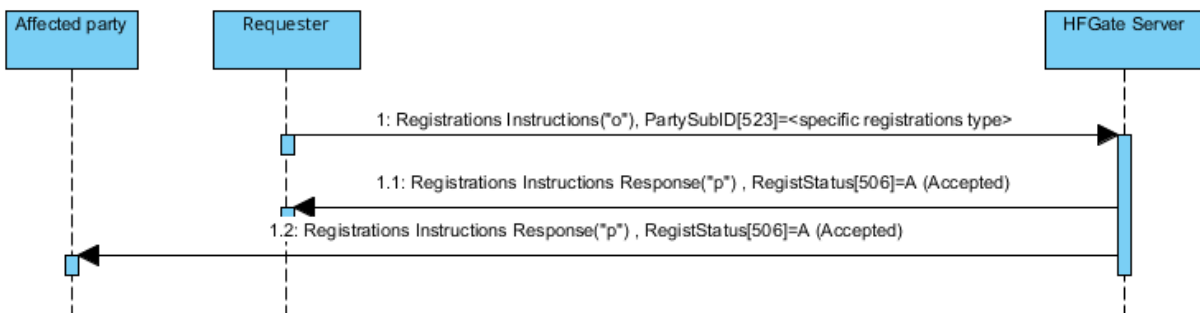

**Incorrect request**

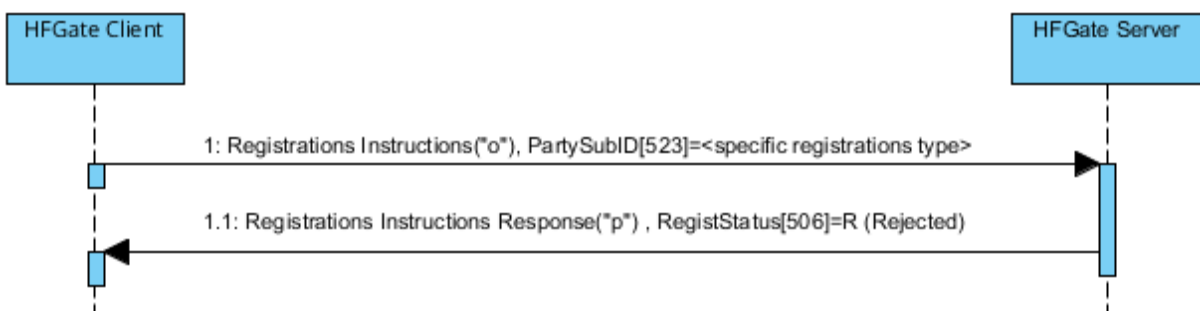

### **9.6.3 Annotations and adaptations of FIX 5.0**

In the Registration Instructions message, the fields NoPartyIDs [453] and NoPartySubIDs [802] are now required

The field RejectText [1328] has been added to the Registration Instructions Response message

The blocks Instrument and Stipulations have been added as required to the Registration Instructions message

The blocks Instrument and Stipulations have been added to the Registration Instructions Response message

## 9.6.4 Registration Instructions (Msg Type = o) for Volume Filters

Message sent by the client to manage the configuration of the Volume filters

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = o		
513	RegistID	Y	0 = New	String	Unique identifier for each Registration Instructions message
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Reference identifier for the RegistID (513) with Cancel and Replace RegistTransType (514) transaction types. Required if RegistTransType = 1 or 2
Start <Parties>					
453	NoPartyIDs	Y*		NumInGroup	
→ 448	PartyID	Y*		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	Y*	D = Proprietary / Custom code 13 = Order Origination Firm	String	
→ 452	PartyRole	Y*	11 = Order Origination Trader  See "4.3 - Parties block" for more details	Int	
→ 802	NoPartySubIDs	Y*	1	NumInGroup	
→→ 523	PartySubID	Y*	VOL_C = Price Filters configuration acting as a Clearing Member  VOL_T = Price Filters configuration acting as a Non-Clearing Member	String	
End <Parties>					
Start <Instrument>					
55*	Symbol	Y	[N/A]	String	
1151 *	SecurityGroup	Y*	See table 8 in document "Codification"	String	Product family

Tag	Name	Req	Valid values	Format	Description
	End <Instrument>		Tables" for a list of values		
	Start <Stipulations>				
232*	NoStipulations	Y*		NumInGroup	
→ 233*	StipulationType	Y*	MAXORD = Maximum order size	String	
→ 234*	StipulationValue	Y*		String	When StipulationType [233] = "MAXORD", indicates the maximum order size (it should be a numeric value, >= 0, <=9999, no decimals)
	End <Stipulations>				
	Standard Trailer	Y			

### 9.6.5 Registration Instructions Response (Msg Type = p) for Volume Filters

Message used by HF MEFFGate to indicate the status of the request initiated with the Registration Instructions message of the Volume filters.

This message is sent to the user who made the request and related users affected by the new filter

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
			0 = New		
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Identifier of Registration Instructions message which is replaced or cancelled by this message. Included when RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	N	D = Proprietary / Custom code	String	
			13 = Order Origination Firm		
→ 452	PartyRole	N	11 = Order Origination Trader	Int	
			See "4.3 - Parties block" for more details		
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	VOL_C = Price Filters configuration acting as a Clearing Member	String	

Tag	Name	Req	Valid values	Format	Description
			VOL_T = Price Filters configuration acting as a Non-Clearing Member		
→→ 803	PartySubIDType	N		Int	The content of this field should not be considered
	End <Parties>				
55*	Symbol	Y	[N/A]	String	
1151*	SecurityGroup	N	See table 8 in document "Codification Tables" for a list of values	String	Product family
	End <Instrument>				
	Start <Stipulations>				
232*	NoStipulations	N		NumInGroup	
→ 233*	StipulationType	N	MAXORD = Maximum order size	String	
→ 234*	StipulationValue	N		String	
	End <Stipulations>				
506	RegistStatus	Y	A = Accepted R = Rejected	Char	Status of the Registration Instructions request message. If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
1328*	RejectText	N		String	If RegistStatus = "R" there is an explanation of the rejection
	Standard Trailer	Y			

## 9.7 Management for HFT - IFTL (Maximum variation of the position)

For HF MEFFGate users with this filter activated, the corresponding maximum variation of the position filter configuration will be defined by its Clearing Member.

When a new filter (or a modification of a previous one) is entered, an initial position can be established. By default, the initial position is zero.


As it is explained in section “3.7 - Synchronisation at application level”, when a client initiates a FIX session (Logon message accepted), it receives the Registration Instructions and Registration Instructions Response messages (which indicates the user’s established “Configuration for HFT - IFTL / Maximum variation of the position” and when the user has the relevant permissions, those of the other traders of the entity).

### 9.7.1 List of messages


Message	Description
Registration Instructions (Msg Type = o)	Used by the client to manage the configuration for HFT - IFTL (Maximum variation of the position)
Registration Instructions Response (Msg Type = p)	Sent by HF MEFFGate to notify or reject the configuration for HFT - IFTL (Maximum variation of the position)

### 9.7.2 Message flow

#### Correct request

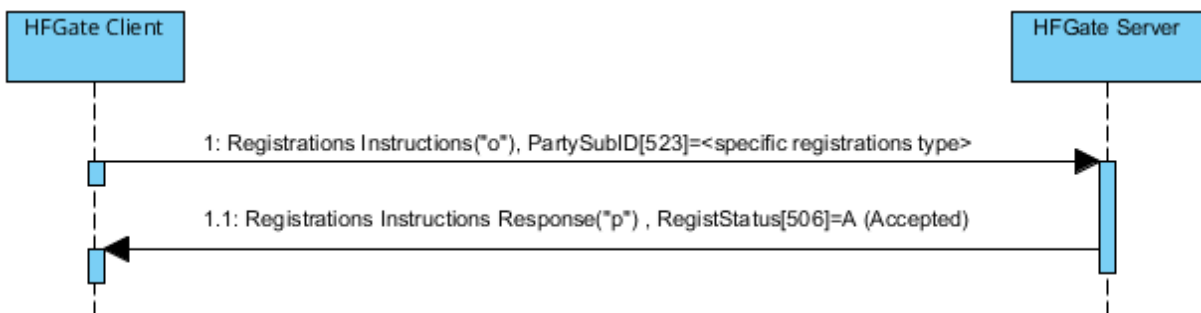

#### Incorrect request

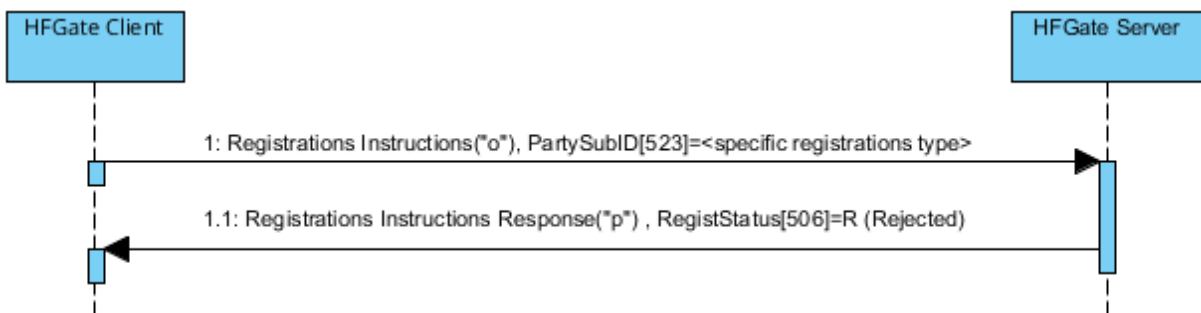

### 9.7.3 Annotations and adaptations of FIX 5.0

In the Registration Instructions message, the fields NoPartyIDs [453] and NoPartySubIDs [802] are now required

The field RejectText [1328] has been added to the Registration Instructions Response message

The blocks Instrument and Stipulations have been added as required to the Registration Instructions message

The blocks Instrument and Stipulations have been added to the Registration Instructions Response message

#### 9.7.4 Registration Instructions (Msg Type = o) for IFTL

Message sent by the client to manage the configuration for HFT – IFTL (Maximum variation of the position)

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = o		
513	RegistID	Y	0 = New	String	Unique identifier for each Registration Instructions message
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Reference identifier for the RegistID (513) with Cancel and Replace RegistTransType (514) transaction types. Required if RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	Y*		NumInGroup	
→ 448	PartyID	Y*		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	Y*	D = Proprietary / Custom code 13 = Order Origination Firm	String	
→ 452	PartyRole	Y*	11 = Order Origination Trader  See "4.3 - Parties block" for more details	Int	
→ 802	NoPartySubIDs	Y*	1	NumInGroup	
→→ 523	PartySubID	Y*	IFTL = Maximum variation of the position	String	
	End <Parties>				
1	Account	N		String	When not specified: filter applies to the member. If three characters specified: filter applies to the holder.
	Start <Instrument>				
55*	Symbol	Y	[N/A]	String	
48*	SecurityID	Y*	See table 7 in document "Codification Tables" for a list	String	Underlying asset.  For IBEX and MiniIBEX: SecurityID [48] = FIE (because IBEX and



Tag	Name	Req	Valid values	Format	Description
			of possible values		MiniIBEX are using the same counter)
22*	SecurityIDSource	Y*	8 = Exchange Symbol	String	
	End <Instrument>				
	Start				
	<Stipulations>				
232*	NoStipulations	Y*		NumInGroup	
→ 233*	StipulationType	Y*	MAXVARPOS = Maximum position  INIPOS = Initial position	String	
→ 234*	StipulationValue	Y*	A numeric value, no decimals	String	When StipulationType [233] = MAXVARPOS, indicates the maximum variation of the position (in absolute value)  When StipulationType [233] = INIPOS, indicates Initial position (with sign)
	End <Stipulations>				
	Standard Trailer	Y			

### 9.7.5 Registration Instructions Response (Msg Type = p) for IFTL

Message used by HF MEFFGate to indicate the status of the request initiated with the Registration Instructions message for HFT - IFTL (Maximum variation of the position).

This message is sent to the user who made the request and related users affected by the new filter

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
			0 = New		
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Identifier of Registration Instructions message which is replaced or cancelled by this message. Included when RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	N	D = Proprietary / Custom code	String	
			13 = Order Origination Firm		
→ 452	PartyRole	N	11 = Order Origination Trader	Int	See "4.3 - Parties block" for more details
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	IFTL = Maximum variation of the position	String	

Tag	Name	Req	Valid values	Format	Description
→→ 803	PartySubIDType	N		Int	The content of this field should not be considered
	End <Parties>				
1	Account	N		String	When not specified: filter applies to the member. If three characters specified: filter applies to the holder.
	Start <Instrument>				
55*	Symbol	Y	[N/A]	String	
48*	SecurityID	Y*	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
22*	SecurityIDSource	Y*	8 = Exchange Symbol	String	
	End <Instrument>				
	Start <Stipulations>				
232*	NoStipulations	N		NumInGroup	
→ 233*	StipulationType	N	MAXVARPOS = Maximum position  INIPOS = Initial position	String	When StipulationType [233] = MAXVARPOS, indicates the maximum variation of the position (in absolute value)  When StipulationType [233] = INIPOS, indicates Initial position (with sign)
→ 234*	StipulationValue	N		String	
	End <Stipulations>				
506	RegistStatus	Y	A = Accepted  R = Rejected	Char	Status of the Registration Instructions request message.  If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
1328*	RejectText	N		String	If RegistStatus = "R" there is an explanation of the rejection
	Standard Trailer	Y			

## 9.8 Management of Permissions

Allows the authorised users to define and modify the permissions of each of the users within the member.


As it is explained in section “3.7 - Synchronisation at application level”, when a client initiates a FIX session (Logon message accepted), it receives the Registration Instructions and Registration Instructions Response messages (which indicates the user’s established price filters and when the user has the relevant permissions, those of the other traders of the entity).

### 9.8.1 List of messages


Message	Description
Registration Instructions (Msg Type = o)	Used by the client to manage the permissions
Registration Instructions Response (Msg Type = p) for Permissions Management	Sent by HF MEFFGate to notify or reject the configuration of the permissions

### 9.8.2 Message flow

#### Correct request

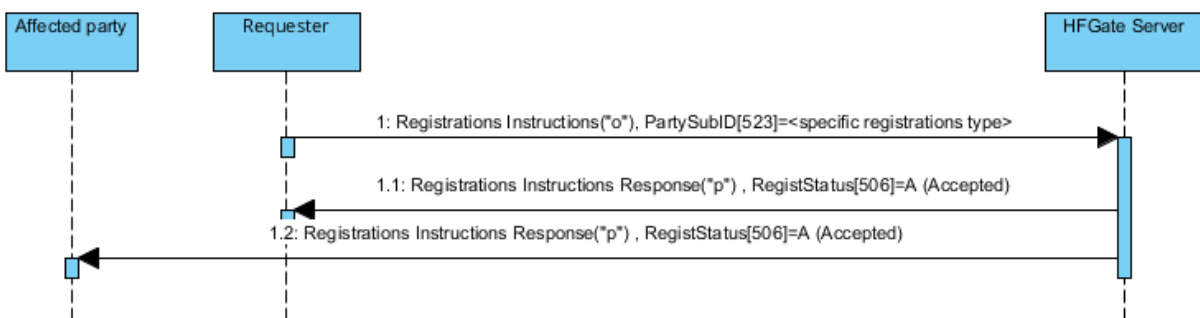

#### Incorrect request

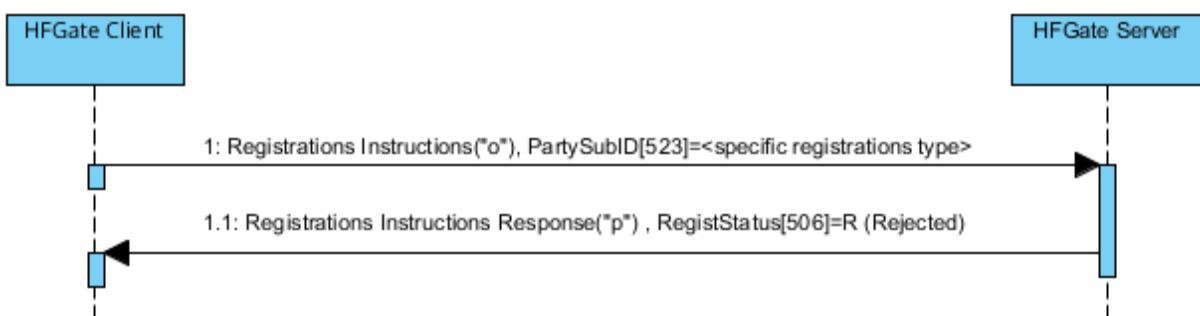

### 9.8.3 Annotations and adaptations of FIX 5.0

In the Registration Instructions message, the fields NoPartyIDs [453] and NoPartySubIDs [802] are now required

The field RejectText [1328] has been added to the Registration Instructions Response message

The block Stipulations has been added as required to the Registration Instructions message

The block Stipulations has been added to the Registration Instructions Response message

## 9.8.4 Registration Instructions (Msg Type = o) for Permissions Management

Message sent by the client to manage the configuration of the permissions

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = o		
513	RegistID	Y	0 = New	String	Unique identifier for each Registration Instructions message
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Reference identifier for the RegistID (513) with Cancel and Replace RegistTransType (514) transaction types. Required if RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	Y*		NumInGroup	
→ 448	PartyID	Y*		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	Y*	D = Proprietary / Custom code	String	
→ 452	PartyRole	Y*	13 = Order Origination Firm 11 = Order Origination Trader	Int	See "4.3 - Parties block" for more details
→ 802	NoPartySubIDs	Y*	1	NumInGroup	
→→ 523	PartySubID	Y*	PERM = Management of Permissions	String	
	End <Parties>				
	Start <Stipulations>				
232*	NoStipulations	Y*		NumInGroup	
→ 233*	StipulationType	Y*	ACTION = Code of the action protected by the corresponding permission AUT = Indicates whether or not permission has been granted for this action	String	
→ 234*	StipulationValue	Y*		String	When StipulationType [233] = "ACTION", indicates the code of the action protected by the corresponding permission. See

Tag	Name	Req	Valid values	Format	Description
					table 17 in document "Codification Tables" for a list of possible values
					Possible values for StipulationType [233] = "AUT" are:
					Y - Permission has been granted for this action
					N - Permission has not been granted for this action
	End <Stipulations>				
	Standard Trailer	Y			

## 9.8.5 Registration Instructions Response (Msg Type = p) for Permissions Management

Message used by HF MEFFGate to indicate the status of the request initiated with the Registration Instructions message to manage the configuration of the permissions.

This message is only sent to the user who made the request.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
			0 = New		
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Identifier of Registration Instructions message which is replaced or cancelled by this message. Included when RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Member and Trader codes which acts this configuration
→ 447	PartyIDSource	N	D = Proprietary / Custom code	String	
			13 = Order Origination Firm		
→ 452	PartyRole	N	11 = Order Origination Trader	Int	
			See "4.3 - Parties block" for more details		
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	PERM = Management of Permissions	String	
→→ 803	PartySubIDType	N		Int	The content of this field should not be considered
	End <Parties>				



Tag	Name	Req	Valid values	Format	Description
	Start <Stipulations>				
232*	NoStipulations	N		NumInGroup	
→ 233*	StipulationType	N	ACTION = Code of the action protected by the corresponding permission	String	
			AUT = Indicates whether or not permission has been granted for this action		
→ 234*	StipulationValue	N		String	When StipulationType [233] = "ACTION", indicates the code of the action protected by the corresponding permission. See table 17 in document "Codification Tables" for a list of possible values  Possible values for StipulationType [233] = "AUT" are:  Y - Permission has been granted for this action N - Permission has not been granted for this action
	End <Stipulations>				
506	RegistStatus	Y	A = Accepted R = Rejected	Char	Status of the Registration Instructions request message.  If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
1328*	RejectText	N		String	If RegistStatus = "R" there is an explanation of the rejection
	Standard Trailer	Y			

## 9.9 Drop copy of information about ClientDataID entered from a binary protocol connection


Binary protocol users, when entering orders and quotes, can avoid including explicitly client identification fields and, instead, they can use an integer code that corresponds to field combinations set up in the binary messages “Order and Quote Client Data Parameters”. The key fields in these messages are ClientDataID, together with the user code (Member-Trader).

In order to allow a drop-copy connection the ability to link each Quote Status Report with the details of the corresponding client, in this message an equivalent of every binary protocol “Order and Quote Client Data Parameters Ack/Nack” message.

### 9.9.1 List of messages

Message	Description
Registration Instructions Response (Msg Type = p) for ClientDataID Drop-copy information	Sent by HF MEFFGate to publish ClientDataID information entered by drop-copied users

### 9.9.2 Message flow

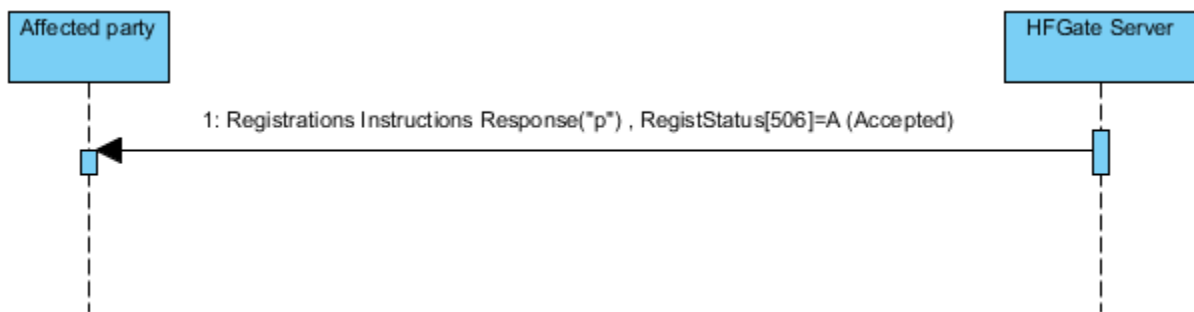

### 9.9.3 Annotations and adaptations of FIX 5.0

The fields OrderOrigination [1724], ExecInst[18], LastCapacity [29], LastCapacity [29], AlgorithmicTradeIndicator [2667], SelfMatchPreventionID [2362], SelfMatchPreventionType [21506] have been added to the Registration Instructions Response message

The blocks OrdAttrib and PreAllocGrp have been added to the Registration Instructions Response message

## 9.9.4 Registration Instructions Response (Msg Type = p) for ClientDataID Drop-copy information

Message used by HF MEFFGate to publish ClientDataID information set by a connection user.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	See section 4.3 - Parties block
→ 447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
			11 = Order Origination Trader  12 = Execution within Firm ID  13 = Order Origination Firm		
→ 452	PartyRole	N	43 = Internal Carry Account  96 = Take-up Trading Firm  122 = Investment Decision Maker ID	Int	
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	CLIENTDATAID = Information about ClientDataID	String	

Tag	Name	Req	Valid values	Format	Description
→→ 803	PartySubIDType	N		Int	The content of this field should not be considered
	End <Parties>				
1	Account	N		String	Account to be applied for the next quotes of futures or options of this underlying asset for this Member-Trader (Order Origination Firm-Order Origination Trader)
506	RegistStatus	Y	A = Accepted R = Rejected	Char	Status of the Registration Instructions request message. If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
1724*	OrderOrigination	N	5 = Order received from a direct access or sponsored access customer	Int	DEA order flag
	Start <OrdAttrib>				
2593*	NoOrderAttributes	N		NumInGroup	
→2594*	OrderAttributeType	N	2	String	Liquidity provision flag
→2595*	OrderAttributeValue	N	Y	String	Liquidity provision flag
	End <OrdAttrib>				
	Start <PreAllocGrp>				
78*	NoAllocs	N		NumInGroup	
→ 79*	AllocAccount	N	[N/A]	String	Always [N/A]
→ 1729*	FirmMnemonic	N		String (10)	Give-out mnemonic
→161*	AllocText	N		String (18)	Give-up reference
	End <PreAllocGrp>				
18*	ExecInst	N	n = Not Cancel on connection loss (default) o = Cancel on connection loss 1 = "AOTC"	MultipleChar Value	Values "n" and "o" are used for the order persistence on connection loss.
29*	LastCapacity	N	3 = "MTCH" 4 = "DEAL"	Char	Trading capacity
2667*	AlgorithmicTradeIndicator	N	1 = Algorithmic (submitted by a trading algorithm)	Int	Algorithmic order flag
2362*	SelfMatchPreventionID	N	Numeric, > 0, <= 65.535	String	Self-Match prevention

Tag	Name	Req	Valid values	Format	Description
21506*	SelfMatchPreventionType	N	1 - reject aggressive order (default) 2 - reject passive order 3 - reject both orders: aggressive and passive	String	Self-Match prevention type. Indicates the behavior to follow when applying the Self-Match Prevention mechanism.
	Standard Trailer	Y			

## 10 Quote management

### 10.1 Introduction

Quote management covers various functions. From the perspective of a FIX client these are:

- Configuration of the quote parameters: Account and delta protection
- Enter quotes
- Modify quotes
- Cancel quotes
- Notification of quote execution

There is a separate section on each of these functions in this chapter. There is a description of the method of use, the list of related messages, the message flow and the additions or annotations incorporated in this implementation for each function. At the end of the chapter there is a detailed description of all the messages included in the chapter.

### 10.2 Configuration of the quote parameters: Account configuration and MiFiD II tags and delta protection

#### 10.2.1 Introduction

The FIX client uses this function to configure the values used by the HF MEFFGate in the delta protection configuration and the account and MiFiD II tags for quotes used in the Quote message.

#### 10.2.2 Description

In order to enter quotes is mandatory to define by the FIX client, for the futures and options of each underlying asset, the account and MiFiD II tags (to be applied for the next quotes) and the delta protection.

These parameters are only valid for the current trading session. The FIX client must send these information everyday.

If these parameters are not defined, HF MEFFGate will reject the quote with the corresponding error message.

When the account or the MiFiD II tags are modified, the new values are only for the next quotes with the same priority order rules.

For delta protection and account configuration and MiFiD II tags for quotes, see chapter "9.3 - Delta protection + Account configuration and MiFiD II tags for quotes".

For message flow and definition of messages, see section 9.3.

## 10.3 Enter quotes

### 10.3.1 Description

The FIX client uses this function to enter quotes in the trading system

Only one quote per security per every FIX client is allowed. If a second quote for the same security is entered, HF MEFFGate will cancel the old quote and will accept (or reject) the new one. HF MEFFGate will never send a cancellation for a previous quote, therefore the client application should interpret receiving a Quote Status Report, be it an acceptance or rejection, as implying the cancellation of the previous quote for this security.

The client application can send a partial quote (only the buy side or the sell side). In this event, only the corresponding side should be filled (BidPx/BidSize o OfferPx/OfferSize) and in the other side zero volume will be assumed and any previous notification will be cancelled.

Once a quote has been accepted, it can be modified, cancelled or executed. These subjects are covered in detail in other sections of this chapter.

The client application must be ready to receive a quote accepted only on one side (buy or sell) and rejected on the other one (for instance due to the price limits).


In the event of any disconnection, the central system will automatically cancel the pending quotes.

### 10.3.2 List of messages


Message	Description
Quote (Msg Type = S)	Used by the client to enter a new quote
Quote Status Report (Msg Type = AI)	Sent by HF MEFFGate, as reply to a Quote message, to confirm or reject the new quote

### 10.3.3 Message flow


#### A single quote entry (using Quote message) totally accepted by HF MEFFGate and central systems

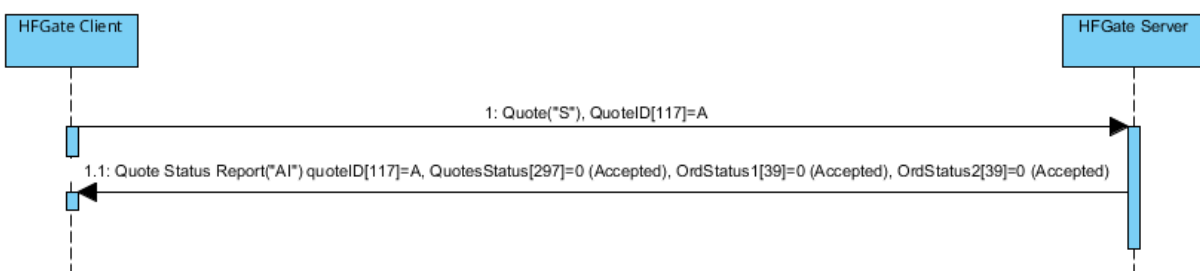


#### New quote entry (using Quote message) partially accepted by central host

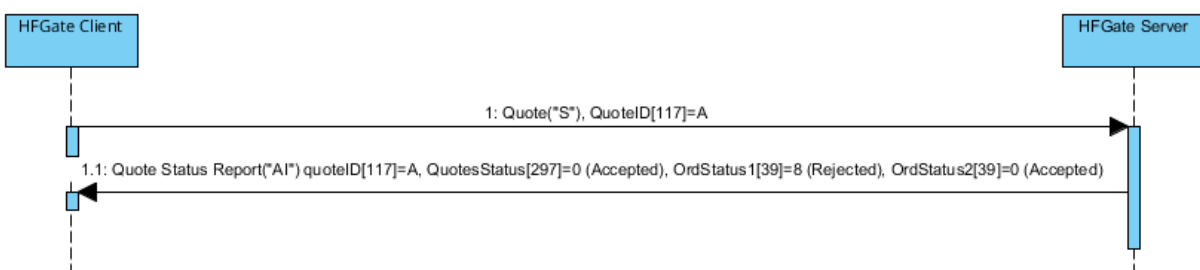


**New partial quote entry (sell-sided only) totally accepted by HF MEFFGate and central**

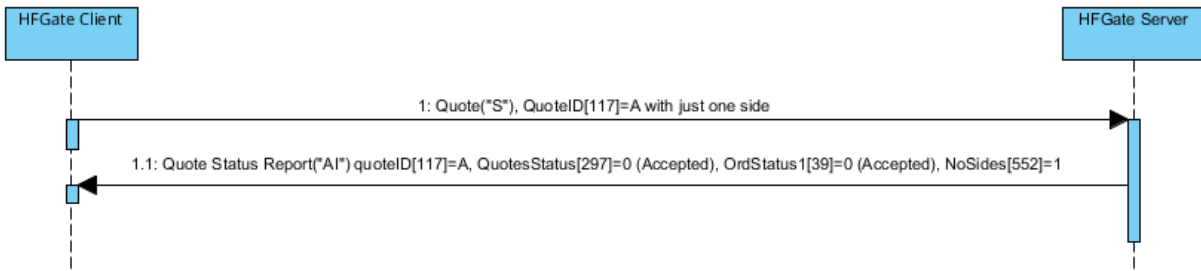


**Quote message rejected by HF MEFFGate**

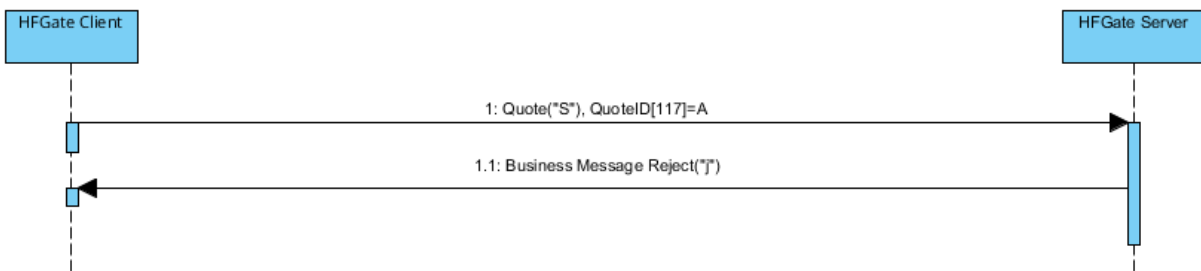

**A second correct quote is entered for the same security (MEFF system automatically cancels the first quote and accepts the second one)**

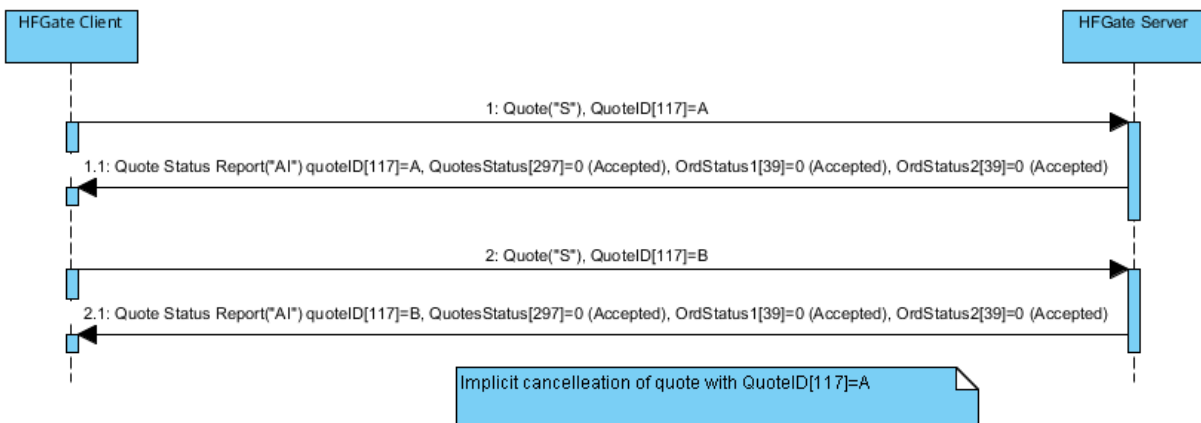


**A second erroneous quote, rejected by the MEFF central system, is entered for the same security (MEFF system automatically cancels both quotes)**

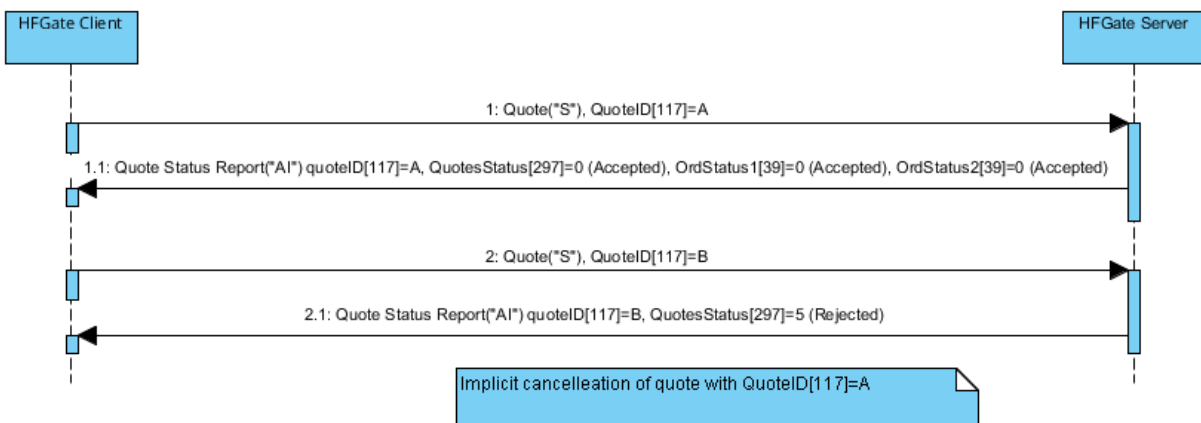



## ReceivePendings [5678] (Logon) = Y: New quote entry totally accepted by HF MEFFGate and central systems

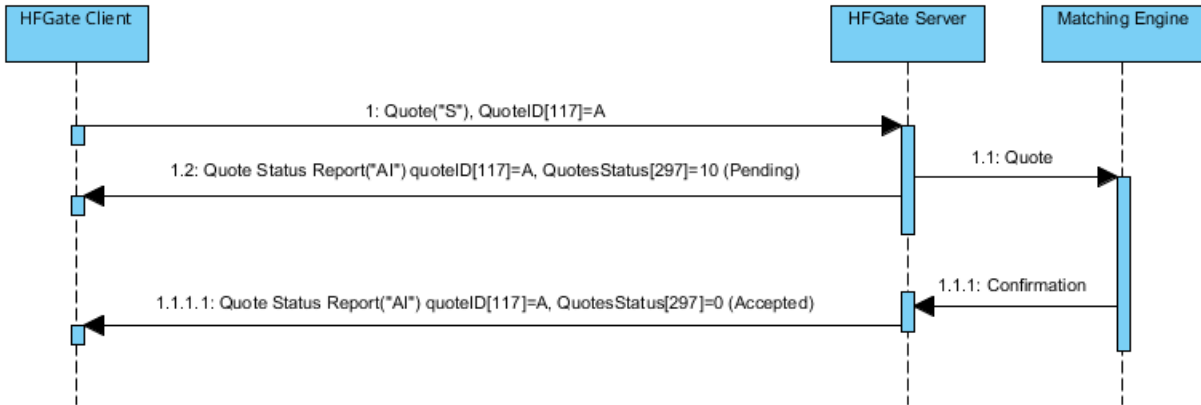

### 10.3.4 Annotations and adaptations of FIX 5.0

The optional fields: NoSides [552], Side [54], SecondaryOrderID [198], SecondaryExecID [527], OrdStatus [39], OrdRejReason [103], LeavesQty [151], ApplID [1180] and ApplSeqNum [1181] have been added to the Quote Status Report message

## 10.4 Modify quotes

### 10.4.1 Description

When a quote has been accepted it is possible to modify various attributes

The following quote attributes can be modified on MEFF:

- Bid price
- Ask price

The modification request is done by using the Quote message with the same QuoteID identifier used for the quote to be modified.

As a general rule the fields specified in the modification request substitute the previous values. The fields not specified remain unchanged.

A quote modification rejected by MEFF central systems means that the MEFF system automatically cancels the existing quote. As in the quote entry, HF MEFFGate will never send a cancellation for a previous quote, therefore the client application should interpret receiving a Quote Status Report, be it an acceptance or rejection, as implying the cancellation of the previous quote for this security.


A quote modification follows the same priority rules applied to limit orders.

### 10.4.2 List of messages


Message	Description
Quote (Msg Type = S)	Used by the client to enter a quote modification
Quote Status Report (Msg Type = AI)	Sent by MEFF to confirm or reject the quote modification

### 10.4.3 Message flow


#### Quote modification accepted by HF MEFFGate and central systems

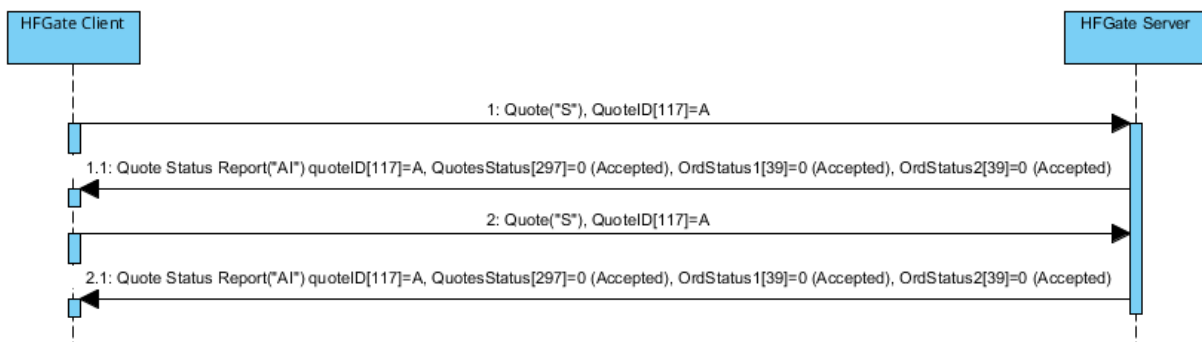


### Quote modification rejected by HF MEFFGate

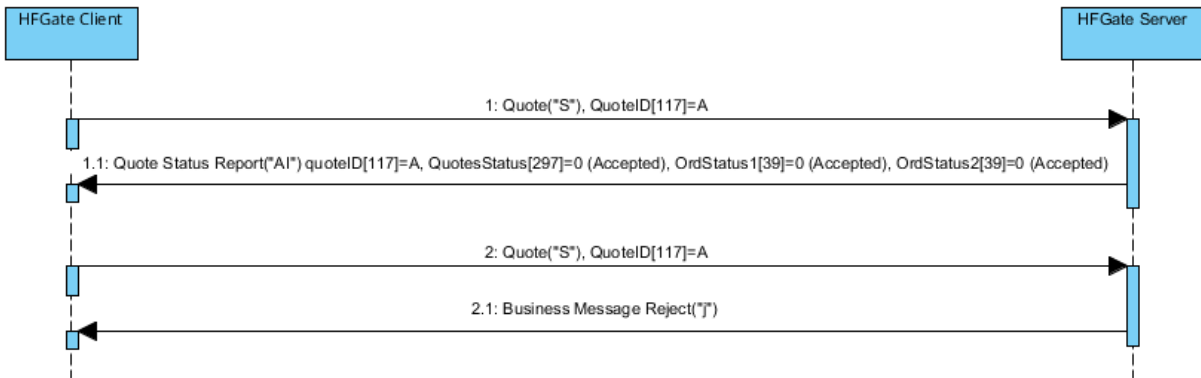

### Quote modification rejected by the MEFF central system (MEFF system automatically cancels the existing quote)

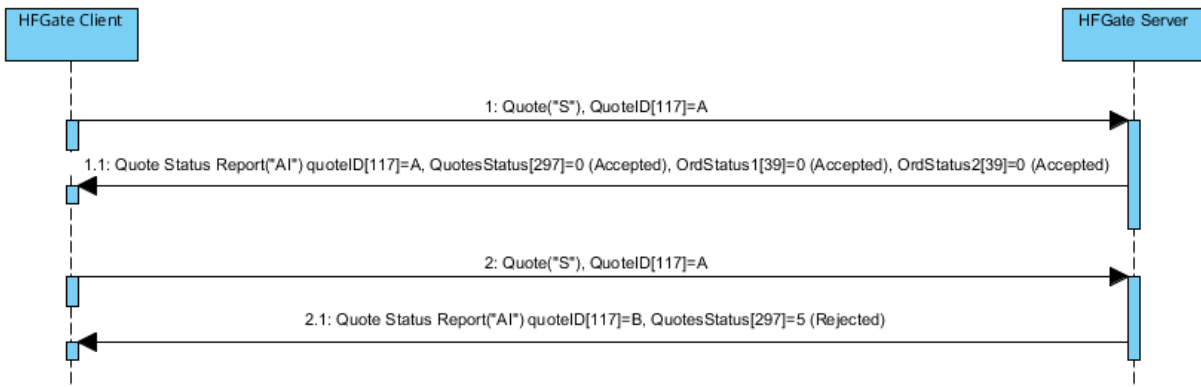

### ReceivePendings [5678] (Logon) = Y: Quote modification accepted by HF MEFFGate and central systems

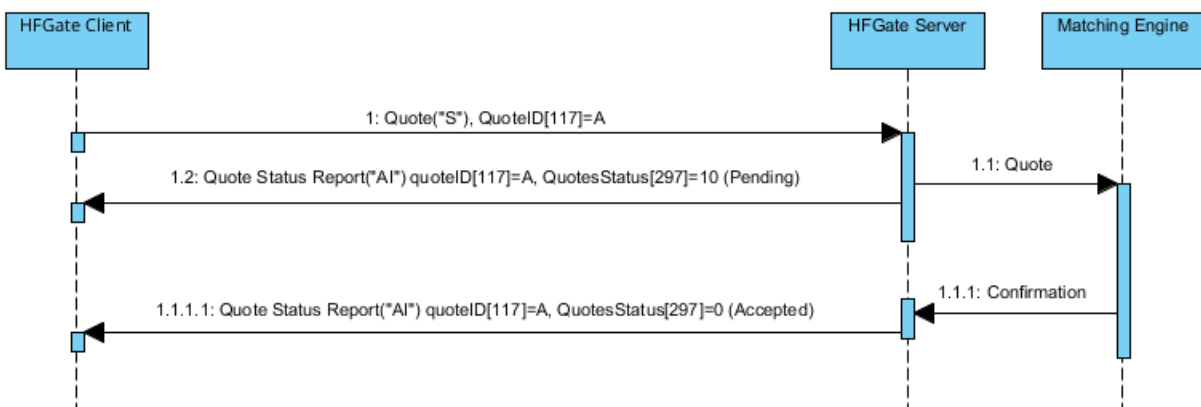

#### 10.4.4 Annotations and adaptations of FIX 5.0

The optional fields: NoSides [552], Side [54], SecondaryOrderID [198], SecondaryExecID [527], OrdStatus [39], OrdRejReason [103], LeavesQty [151], ApplID [1180] and ApplSeqNum [1181] have been added to the Quote Status Report message

## 10.5 Cancel quotes

### 10.5.1 Description

This function allows to cancel a single quote or to cancel a group of quotes with a single instruction

To cancel a single quote the Quote message (Msg Type = S) should be used specifying the security code for the quote to be cancelled and the price and volume fields filled to zero (BidPx, OfferPx, BidSize and OfferSize).

To cancel block of quotes the Quote Cancel message (Msg Type = Z) should be used specifying the selection criteria

### 10.5.2 Selection criteria

The selection criteria for quotes to be cancelled provided by MEFF (using the Quote Cancel message), as described in 4.4, are the following:

- **Symbol [55]**
- **SecurityType [167]**
- **SecurityID [48]**
- **MaturityMonthYear [200]**

When various criteria are used to make a selection, only the quotes that meet all the criteria will be selected.


Selection criteria that are not used will be ignored when selecting quotes. If no selection criteria are specified all quotes will be included.

### 10.5.3 List of messages


Message	Description
Quote (Msg Type = S)	Used by the client to cancel a single quote
Quote Cancel (Msg Type = Z)	Used by the client to cancel quotes that meet selection criteria
Quote Status Report (Msg Type = AI)	Message sent by HF MEFFGate to accept or reject one or various quote cancellations

### 10.5.4 Message flow


#### Mass cancellation quote request accepted

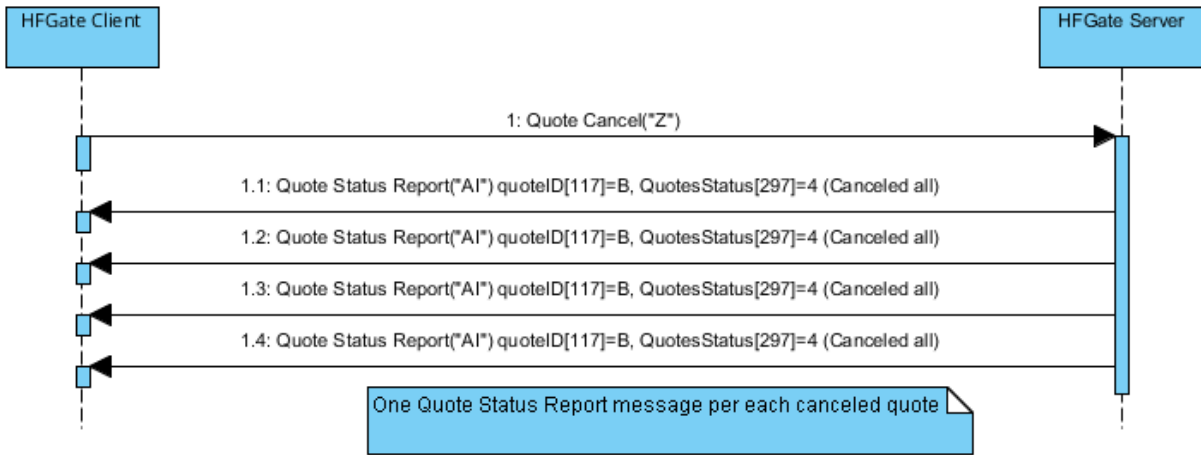

#### Cancellation quote request rejected

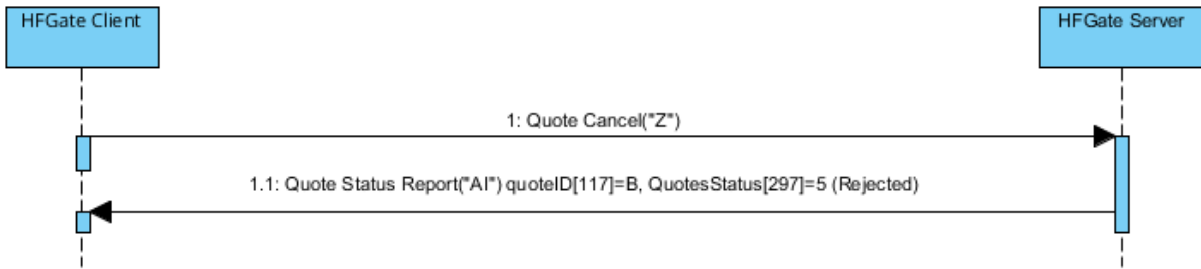

#### ReceivePendings [5678] (Logon) = Y: Mass cancellation quote request accepted

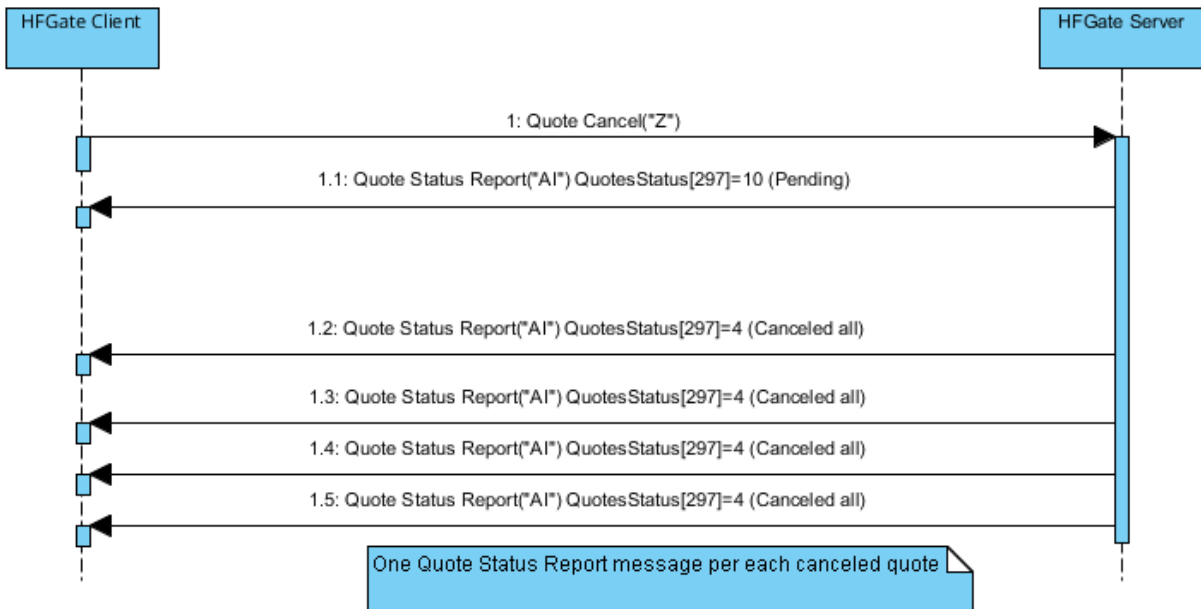

### **10.5.5 Annotations and adaptations of FIX 5.0**

The optional fields Quote Status Report: NoSides [552], Side [54], SecondaryOrderID [198], SecondaryExecID [527], OrdStatus [39], OrdRejReason [103], LeavesQty [151], ApplID [1180] and ApplSeqNum [1181] have been added to the Quote Status Report message

## 10.6 Notification of quote execution

### 10.6.1 Description

When a quote is filled or partially filled, HF MEFFGate sends an Execution Report message to notify this, where the field ExecType [150] = "F" (Trade).


### 10.6.2 List of messages

Message	Description
Execution Report (Msg Type = 8) (ExecType = F)	Sent by HF MEFFGate to notify the quote has been filled or partially filled

### 10.6.3 Message flow

#### Notification of execution

The client receives the Execution Report message for each partial fill or complete fill of a quote.

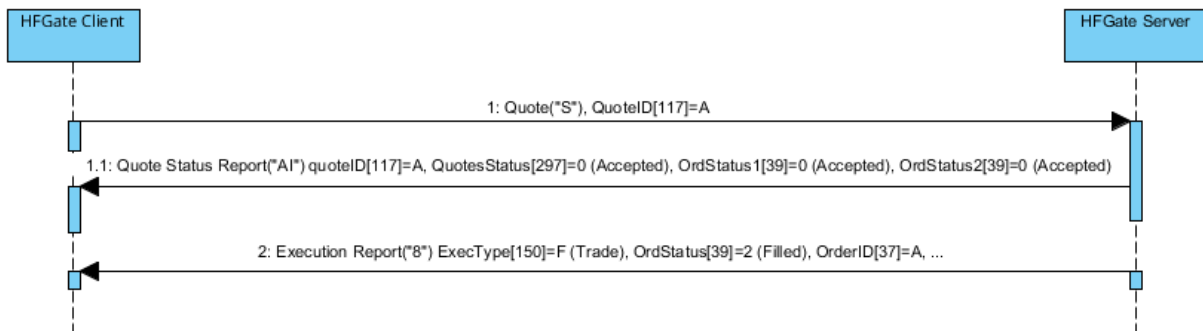

### 10.6.4 Annotations and adaptations of FIX 5.0

No annotations or adaptations have been made to the messages in this chapter.

## 10.7 Quote Status Request

### 10.7.1 Description

This query related to a single quote information is made by means of the Quote Status Request message

The types of information offered by MEFF are:


- **Instrument.** Allows querying a quote on a certain type of security

### 10.7.2 List of messages


Message	Description
Quote Status Request (Msg Type = a)	Status request for a single quote
Quote Status Report (Msg Type = AI)	Information on the quote status, or notification of error in request

### 10.7.3 Message flow

#### Quote status request

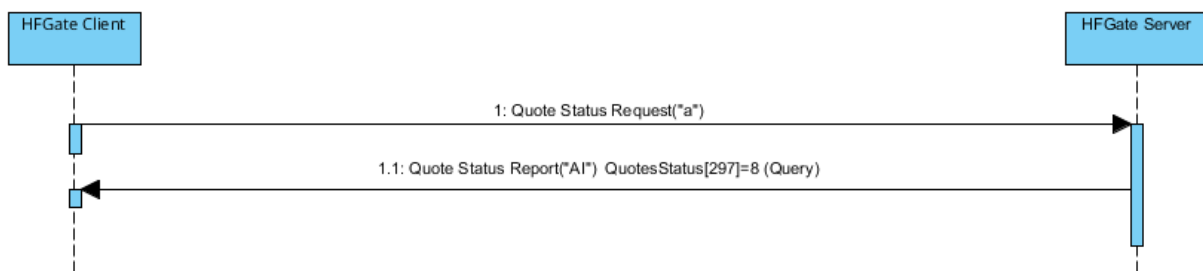

#### Quote status request failed

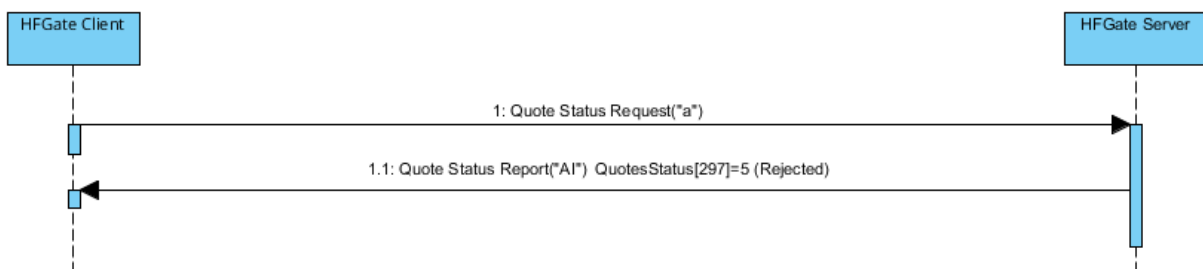

### 10.7.4 Annotations and adaptations of FIX 4.4

In the Quote Status Request message, the QuoteStatusReqID [649] field is now required



## 10.8 Definition of messages

### 10.8.1 Quote (Msg Type = S)

Message sent by client to enter, modify or cancel a quote in the system

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = S		
					Unique quote identifier.
117	QuoteID	Y		String (10)	When it is a modification this field contains the quote identifier as in the original quote
	Start <Instrument>				Contract code
55	Symbol	Y	Contract code	String(22)	When it is a modification or cancellation this field should contain the same value as in the original quote
	End <Instrument>				
					Bid price.
132	BidPx	N		Price	In a modification, if not specified, this field remains unchanged.  In a cancellation it should contain zero
					Ask price.
133	OfferPx	N		Price	In a modification, if not specified, this field remains unchanged.  In a cancellation it should contain zero
					Bid volume.
134	BidSize	N		Qty	In a modification this field must not be included.  In a cancellation it should contain zero
					Ask volume.
135	OfferSize	N		Qty	In a modification this field must not be included.  In a cancellation it should contain zero
	Standard Trailer	Y			

## 10.8.2 Quote Cancel (Msg Type = Z)

Message sent by the client to request the cancellation of quotes that meet certain selection criteria.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = Z		
117	QuoteID	Y		String (10)	Unique identifier of this Quote Cancel Status Request message
298	QuoteCancelType	Y	4 = Cancel All Quotes	Int	
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Member or Trader code whose quotes are to be cancelled
→ 447	PartyIDSource	N	D = Proprietary/ Custom code	Char	Required if NoPartyIDs is specified
→ 452	PartyRole	N	13 = Order Origination Firm  11 = Order Origination Trader	Int	Indicates the role taken by the code specified in PartyID. Required if NoPartyIDs is specified
	End <Parties>				
295	NoQuoteEntries	N	1	NumInGroup	
	Start <Instrument>				
→ 55	Symbol	Y	[N/A] or contract code	String(22)	Contract code. If it is "[N/A]" the quotes for all contracts matching the rest of criteria will be selected
→ 48	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
→ 22	SecurityIDSource	N	8 = Exchange Symbol	String	Required if SecurityID is specified
→ 167	SecurityType	N	See table 6 of document "Codification Tables" for details of the Trade Type codes	String	Product type
→ 200	MaturityMonthYear	N	YYYYMM or YYYYMMDD or YYYYMMwW	Month-Year	Contract expiration
	End <Instrument>				
	Standard Trailer	Y			

### 10.8.3 Quote Status Request (Msg Type = a)

Message sent by the client to request status for a single quote

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = a		
649	QuoteStatusReqID	Y*		String(10)	Message identifier
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Contract code
	End <Instrument>				
	Standard Trailer	Y			

### 10.8.4 Quote Status Report (Msg Type = AI)

Sent by HF MEFFGate to notify the status for a single quote. It also notifies whether the request is accepted or rejected.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = AI		
649	QuoteStatusReqID	N		String	It contains the same value as specified in the related Quote Status Request. Only filled if the Quote Status Report is a consequence of a Quote Status Request.
117	QuoteID	Y		String	QuoteID sent by the client in the Quote message
537	QuoteType	N	1 = Tradeable	Int	
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Member or Trader code
→ 447	PartyIDSource	N	D = Proprietary/ Custom code	Char	
			13 = Order Origination Firm		
→ 452	PartyRole	N	11 = Order Origination Trader  43 = Internal Carry Account	Int	Indicates the role taken by the code specified in PartyID. Required if NoPartyIDs is specified
	End <Parties>				
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Contract code for this quote
48	SecurityID	N		String(12)	ISIN security code
22	SecurityIDSource	N	4 = ISIN Number	String	
	End <Instrument>				
1	Account	N	Fixed length	String(5)	Account code for this quote
132	BidPx	N		Price	Bid price of the quote, as indicated in the Quote message
133	OfferPx	N		Price	Ask price of the quote, as indicated in the Quote message
134	BidSize	N		Qty	Bid volume of the quote, as indicated in the Quote message
135	OfferSize	N		Qty	Ask volume of the quote, as indicated in the Quote message

Tag	Name	Req	Valid values	Format	Description
60	TransactTime	N		UTCimestamp	Time when transaction represented by this Quote Status Report occurred. This field is not present when QuoteStatus is equal to 10
			0 = Accepted		
			4 = Canceled All		Indicates the quote status.
297	QuoteStatus	N	5 = Rejected 8 = Query 10 = Pending	Int	If rejected (value 5), there is an explanation in the RejectText [1328] field
1328	RejectText	N		String	If QuoteStatus [297] = 5 (Rejected) there is an explanation of the rejection
552*	NoSides	N	1, 2	NumInGroup	
→ 54*	Side	N	1 = Buy 2 = Sell	Char	
→198*	SecondaryOrderID	N		String	Identifier per side of the quote (one for the buyer and a different one for the seller), assigned by central system of MEFF
→527*	SecondaryExecID	N		String	Quote side history number, assigned by central system of MEFF. Each time there is a new event in the life of the quote side (modification, trade or cancellation) is assigned a new value to this field.
			0 = New		
			1 = Partially Filled		
			2 = Filled		
→39*	OrdStatus	N	4 = Cancelled 6 = Pending Cancel 8 = RejectedA = Pending New E = Pending Replace	Char	Indicates the current status of the buy side or the sell side of the quote
→103*	OrdRejReason	N	See codification table 20	Int	Rejection or cancellation motive. Present when OrdStatus [39] = 4 or 8
→151*	LeavesQty	N		Qty	Quote volume pending of the buy side or the sell side of the quote.

Tag	Name	Req	Valid values	Format	Description
	Start <Stipulations>				Contains 0 when OrdStatus [39] = 4 (Cancelled)
→232 *	NoStipulations	N		NumInGroup	
→→23 3*	StipulationType	N	LATENCY = Indicator of having been in latency protection  RTS24_21 = Event according to field 21 RTS 24	String	When StipulationType [233] = LATENCY, the valid values are: Y = Yes. The quote side (buy or sell) has been in latency protection. N = No (default). The quote side (buy or sell) has not been in latency protection.  If this field is not reported it means that the quote side (buy or sell) has not been in latency protection.  When StipulationType [233] = RTS24_21: NEWO – New order REME – Replaced by initiative of message receiver REMA – Replaced by Market Surveillance (automatic) REMH – Replaced by Market Surveillance (manual) CAME – Cancellation by initiative of message receiver CAMO – Cancellation by Surveillance REMO – Rejection EXPI – Order expired PARF – Partial fill FILL – Filled CHME – Change of status at the initiative of the member/participant of the trading venue CHMO – Change of status due to market operations
→→23 4*	StipulationValue	N			
	End <Stipulations>				
1180*	AppIID	N		String	Used in conjunction with AppISeqNum [1181] to indicate, in

Tag	Name	Req	Valid values	Format	Description
					subsequent connections, the point from which to receive information
1181*	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
	Standard Trailer	Y			

## 11 Cross trades

### 11.1 Introduction

This chapter describes the mechanisms offered by MEFF FIX interface to manage the cross trades.

This functionality allows members to request the registration of these cross trades on MEFF.

In the cross trades between different members there are typically involved two members: one buy side and one sell side. They are entered in the system by one of the two members or an executing broker. The cross trade must be explicitly accepted by both the buy side and sell side members, furthermore, in certain circumstances, the Market Supervisor may also have to accept the cross trade.

To request the register for a cross trade, the message Trade Capture Report is used.

Client systems of the HF MEFFGate will receive a Trade Capture Report for each cross trade to be confirmed. It is not necessary to send as a response a Trade Capture Report Ack message; these messages are ignored by the MEFFGate. The client system can reject or accept a cross trade. When accepting the cross trade, the client code to which the cross trade is to be assigned has to be informed.

Each time a modification in the state of a cross trade is effected, HF MEFFGate, using a Trade Capture Report, will notify each of the parties involved: the buyer, the seller and, if present, the executing broker. Note that, HF MEFFGate only informs of the client account code or the reference to the interested parties (the buy side or sell side)

Some cross trades, having been accepted by both parties, will need to be accepted also by Market Supervision. When Market Supervision accepts or rejects the cross trades, all the parties will receive a notification.

Some cross trades may be pending collateral arrangements by a member. The system will notify this circumstance to the interested party.

Note that, for those cross trades which are in the end accepted, an Execution Report will be generated for each of the counterparties.

### 11.2 Entry of cross trades between different members

There are three parties involved in these cross trades: the buyer and the seller in the cross trade, and the broker that sends the cross trade to HF MEFFGate. These cross trades are notified to HF MEFFGate using the Trade Capture Report message. Each of the parties is identified by the member and trader code.

To identify a non-standard (flexible) contract, tag FlexibleIndicator [1244] should be informed and also the following combination should be used in the cross trade functionality: SecurityType [167] + PutOrCall [201] + SettlementMethod [1193] + ExerciseStyle [1194] + EventText [868] when EventType [865] = 134 + SecurityID [48] + MaturityDate [541] + ContractMultiplier [231] + StrikePrice [202]. In this case, where appropriate, the central system will assign a new code following the existing rules and will populate these fields in the Trade Capture Report message.

Once the cross trade has been sent to HF MEFFGate, it can be cancelled by the sender via the HF MEFFGate, or by using a supervisor terminal or by contacting the market supervisor, providing that it has not yet been registered.

Modifications are permitted using a supervisor terminal or by contacting the market supervisor, providing that it has not yet been accepted by any of the parties.



Both the buyer and the seller can act as brokers, as well as an external member. This means there are four possible scenarios:

Scenario	Identification of the parties in the message
Broker, buyer and seller are different members	SenderCompID = Broking member code SenderSubID = Broking trader code Buyer PartyID = Buying member code Buyer PartySubID = Buying trader code Seller PartyID = Selling member code Seller PartySubID = Selling trader code
The buyer acts as broker	SenderCompID = Buying member code SenderSubID = Buying trader code Buyer PartyID = Buying member code Buyer PartySubID = Buying trader code Seller PartyID = Selling member code Seller PartySubID = Selling trader code
The seller acts as broker	SenderCompID = Selling member code SenderSubID = Selling trader code Buyer PartyID = Buying member code Buyer PartySubID = Buying trader code Seller PartyID = Selling member code Seller PartySubID = Selling trader code
The same member acts as buyer, seller and broker	SenderCompID = Member code SenderSubID = Trader code Buyer PartyID = Buying member code Buyer PartySubID = Buying trader code Seller PartyID = Selling member code Seller PartySubID = Selling trader code

See 3.3 for more information on the use of the SenderCompID and SenderSubID fields.

### 11.3 Acceptance of cross trades between different members

If the cross trade is finally accepted and executed, both the buyer and the seller receive the corresponding Execution Report messages (ExecType = F, Trade) notifying them of the execution of the cross trade. These messages will have the trader code corresponding to the one who accepted the cross trade. The CrossID field of the Execution Report message contains the SecondaryTradeReportID value assigned by the central host.

As previously explained, when the cross trade is accepted and executed, the intermediary receives a Trade Capture Report message

The Execution Report message allows the broker of the cross trade to be identified using the Entering Firm and Entering Trader roles in the Parties block (see 4.3 for more information on the Parties block).

### 11.4 Entry of cross trades within the member

In this situation the confirmation for the sides involved is not necessary.

### 11.5 Price and Effective amount

The field GrossTradeAmt [381] indicates the effective amount. If informed, this value will be used instead of the rounded price.

The System will determine the transaction price according to:

$$\text{Precio\_trans} = \frac{\text{Effective\_amount}}{\text{Volume} \bullet \text{multiplier}}$$

and will be verified that this value Precio\_trans is commensurate with the rounded price furnished by the client application in the field LastPx [31] of the Trade Capture Report message. If not, the cross trade will be rejected.

### 11.6 Cross trade groups and cash market cross trades

Tag TradeLinkID [820] allows for the grouping of different cross trades on the same underlying into one single cross trade group.

In this case, one of the trades may refer to the underlying contract. If this may be traded in the equities trading platform, the cash market cross trade will be notified to the MEFF members and the equities trading platform members (Authenticating Member) who will be person responsible for accepting or rejecting it. The final acceptance of the cash market cross trade is subject to the acceptance of some of the corresponding derivatives cross trades.

### 11.7 Cross trade rejected by the System

All system rejections are homogenized and are always done in the same way: sending a Business Message Reject message. As a consequence, value B is not longer used in field MatchType [574]

### 11.8 List of messages


Message	Description
Trade Capture Report (Msg Type = AE)	Sent to HF MEFFGate to initiate, accept, reject or cancel a trade request about block trading or special operations. Sent by HF MEFFGate to request the acceptance or rejection by the parties

### 11.9 Message flow

#### A cross trade accepted (The buyer and the seller are the same member)



## Cross trade rejected by the System

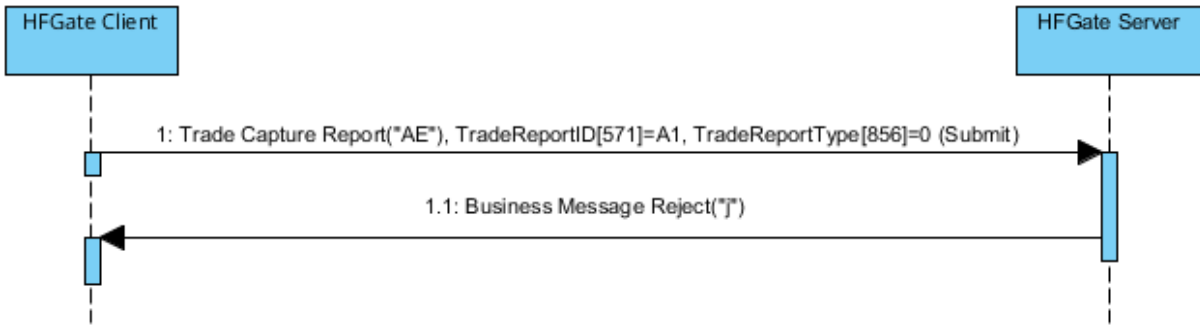


## Cross trade request in Derivatives (entered by a member different than the buyer or the seller)

The following diagram shows the message flow of a cross trade request entered by the Executing Broker, accepted first by the buy side and then by the sell side. Once the cross trade has been accepted by the Supervisor, the parties receive the corresponding Executing Report.



## Cash market cross trades request

In this message flow it appears the figure of the Authenticating Firm, who accepts the transaction (in its buying or selling side). The buyer and seller receive information on the status of implementation at all times.

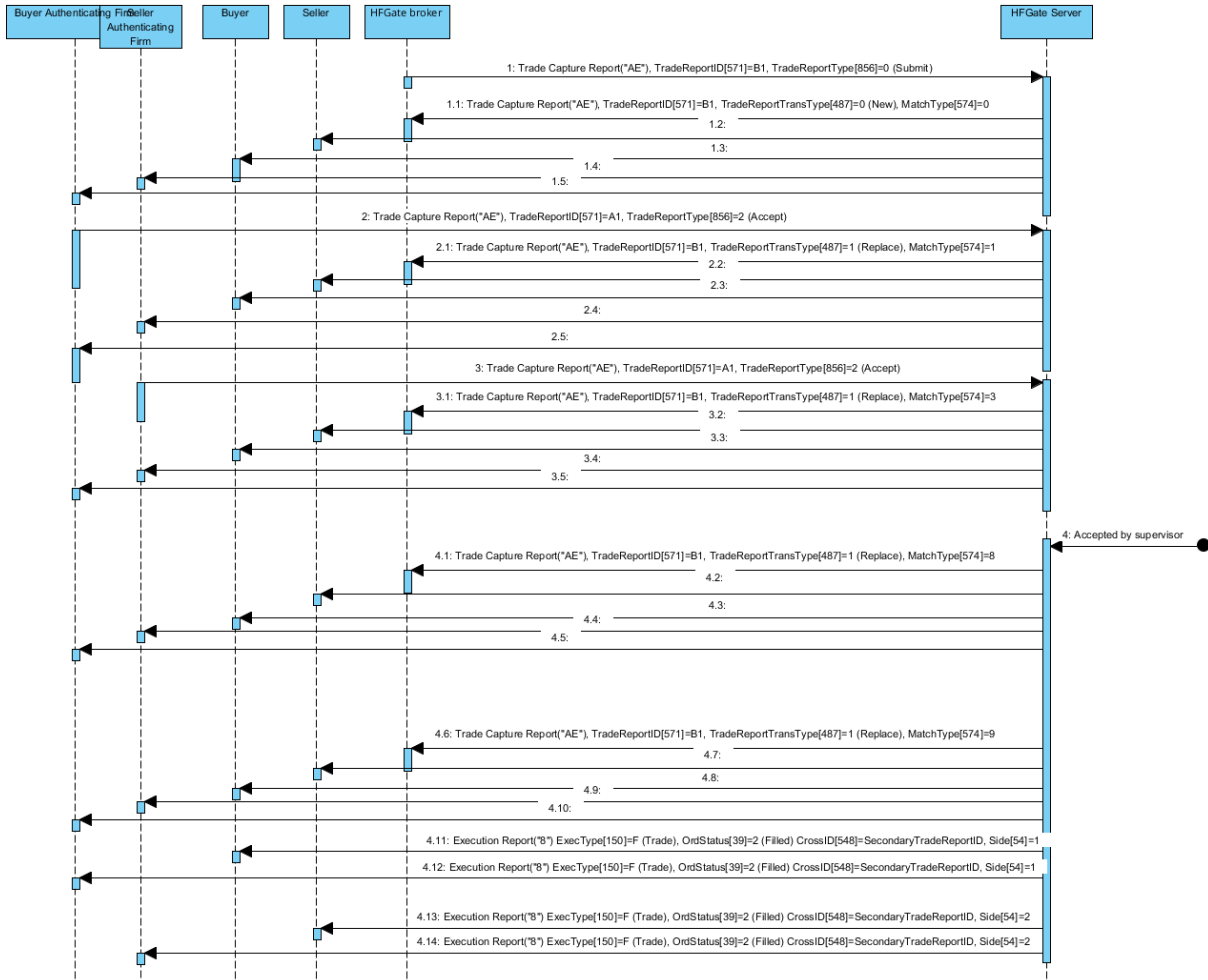

### 11.10 Annotations and adaptations of FIX 5.0

In the Trade Capture Report sent to HF MEFFGate message, the TradeReportType [856], TrdType [828] and TrdSubType [829] fields are now required

## 11.11 Definition of messages

### 11.11.1 Trade Capture Report (Msg Type = AE) sent to HF MEFFGate

Message containing data for the registering on a trade.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = AE		
571	TradeReportID	Y		String (10)	Unique identifier for each Trade Capture Report message sent to HF MEFFGate. Unique per FIX session. Type of Trade Report.:
856	TradeReportType	Y*	0 = Submit 2 = Accept 3 = Decline 6 = Trade Report Cancel	Int	0 (Submit): This is the value indicated by the initiator when he sends the initial cross trade request 2 (Accept): Used by one counterparty to accept a cross trade 3 (Decline): Used by one counterparty to reject a cross trade 6 (Cancel): This is the value to indicate by the initiator to cancel the initial cross trade request
828	TrdType	Y*	See table 4 of document "Codification Tables" for details of the Trade Type codes	Int	Trade type. This value is used in conjunction with TrdSubType [829]
829	TrdSubType	Y*	See table 4 of document "Codification Tables" for details of the Trade Type codes	Int	This value is used in conjunction with TrdType [828]
881	SecondaryTradeReportRefID	N		String	Required except for the initial cross trade request. It must contain the value received from MEFFGate in the field SecondaryTradeReportID [818] of the Trade Capture

Tag	Name	Req	Valid values	Format	Description
					Report or Trade Capture Report Ack messages.
					This is the cross trade request unique identifier through its whole life.
820	TradeLinkID	N		String	Used by the HF MEFFGate client to associate a group of cross trades together
	Start <Instrument>				
55	Symbol	Y	Contract code, [N/A]	String(22)	Contract code or [N/A]
48	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
22	SecurityIDSource	N	8 = Exchange symbol	String	Required if SecurityID [48] is present.
167	SecurityType	N	See table 6 of document "Codification Tables" for details of the Trade Type codes	String	Product type
541	MaturityDate	N		LocalMktDate	Expiration date
202	StrikePrice	N		Price	Exercise price. Only present for options
231	ContractMultiplier	N		Float	Conversion factor between price units and monetary units
1193	SettlMethod	N	C = Cash settlement required P = Physical settlement required	Char	Settlement method for this security
1194	ExerciseStyle	N	0 = European 1 = American	Int	Type of exercise of this security
201	PutOrCall	N	0 = Put 1 = Call	Int	Indicates whether an option contract is a put or call
1244	FlexibleIndicator	N	Y = Flexible N = Standard (default)	Boolean	Used to indicate if this security has been defined as flexible according to "non-standard" means.  When not informed, means "N = Standard "

Tag	Name	Req	Valid values	Format	Description
864	NoEvents	N		NumInGroup	
			134 = Adjustments rule		
→865	EventType	N	135 = Indicates if a RFQ must be generated when the cross trade can't be accepted for overcoming the LIS	Int	
					When EventType [865] = 134, contains the adjustments rule: E = Extraordinary dividend adjustments only ( T = Total
→868	EventText	N		String	DO NOT send this field on securities where adjustments don't apply
					When EventType [865] = 135, indicates if a RFQ must be generated when the cross trade can't be accepted for overcoming the LIS:  Y = Yes N = No
End <Instrument>					
32	LastQty	N	>= 0, no decimals	Qty	Volume bought/sold in the cross trade described.
31	LastPx	N		Price	Average price in the cross trade described. If this cross trade is expressed through an effective amount, GrossTradeAmt [381], this is the rounded transaction price.
Start <TrdCapRptSideGrp>					
552	NoSides	Y	1, 2	NumInGroup	
→ 54	Side	Y	1 = Buy 2 = Sell	Char	Position that the party takes in the cross trade
Start <Parties>					
					Not needed in a cross trade within the member

Tag	Name	Req	Valid values	Format	Description
→453	NoPartyIDs	N		NumInGroup	Number of parties
→→ 448	PartyID	N	For PartyRole [452] = 3, 12 or 122, this is an unsigned integer field, greater or equal than 0 and less than 232	String	See section 4.3 - Parties block
→→ 447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID  4 = Authenticating Firm  7 = Entering Firm	Char	Required if NoPartyIDs is specified: Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
→→ 452	PartyRole	N	11 = Order Origination Trader  12 = Execution within Firm ID  13 = Order Origination Firm  36 = Entering Trader  122 = Investment Decision within Firm ID	Int	Indicates the role taken by the code specified in PartyID [448].  Required if NoPartyIDs [453] is specified.
→→80 2	NoPartySubIDs	N		NumInGroup	Number of sub-identifiers.  This sub-group is only present when PartyRole [452] = 11
→→→ 523	PartySubID	N		String	Phone number and contact name of the buyer/seller order origination trader
→→→ 803	PartySubIDType	N	7 = Phone number	int	



Tag	Name	Req	Valid values	Format	Description
			9 = Contact name		
	End <Parties>				
→ 1	Account	N		String	Account code
→ 581	AccountType	N	1 = On behalf of third parties 3 = House trader	Int	Capacity indicator (only for cash market trades)
→ 58	Text	N		String(15)	Reference
→ 232	NoStipulations	N		NumInGroup	
			CL_ID_CMT = Short code Client identification for the cash market leg		
			INV_DEC_ID_CMT = Short code to identify the party for the Investment Decision within Firm for the cash market leg		
→→ 233	StipulationType	N	INV_EXE_ID_CMT = Short code to identify the party for the Execution within Firm for the cash market leg	String	
			TR_CAP_CMT = Trading capacity for the cash market leg		
			CL_ACCT_COD_CMT = Client account code for the cash market leg		
→→ 234	StipulationValue	N		String	When StipulationType [233] = CL_ID_CMT, it contains the short code Client identification for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232

Tag	Name	Req	Valid values	Format	Description
					When StipulationType [233] = INV_DEC_ID_CMT, it contains the short code to identify the party for the Investment Decision within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = INV_EXE_ID_CMT, it contains the short code to identify the party for the Execution within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = TR_CAP_CMT, it contains the Trading capacity for the cash market leg. Los posibles valores son: AOTC MTCH DEAL
					When StipulationType [233] = CL_ACCT_COD_CMT, it contains the Client account code for the cash market leg
<hr/>					
	End <Stipulations>				
	Start <OrdAttrib>				
→259 3	NoOrderAttributes	N		NumInGroup	
→→25 94	OrderAttributeType	N	3 = Risk reduction order	String	
					When OrderAttributeType [2594] = 3, indicates a Risk reduction order. Valid values:
→→25 95	OrderAttributeValue	N		String	Y = In the context of ESMA RTS 22 Article 4(2)(i), when OrderAttributeValue(2595) =Y, it signifies that the commodity derivative order is a transaction "to reduce risk in an

Tag	Name	Req	Valid values	Format	Description
	End <OrdAttrib>		1 = "AOTC"		objectively measurable way in accordance with Article 57 of Directive 2014/65/EU" N = The commodity derivative order does NOT reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU"
→29	LastCapacity	N	3 = "MTCH"	Char	Trading capacity
1390	TradePublishIndicator	N	4 = "DEAL" 0 = Do Not Publish 1 = Publish (Default) 2 = Delta: Do Not Publish	Int	Indicates if the trade should be published or not.  Not informing this tag means the trade should be published.
994	TierCode	N	R = Enviar a modalidad RFQ si es necesario  N = No enviar a modalidad RFQ (default)	Char	
381	GrossTradeAmt	N		Amt	Effective amount. If informed, this value will be use instead of the price (LastPx [31]). It must be the same for the buying and selling party.
	Standard Trailer	Y			

### 11.11.2 Trade Capture Report (Msg Type = AE) sent by HF MEFFGate

Message containing data on a trade pending on registration and used to request the acceptance or rejection by the member

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = AE		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
571	TradeReportID	Y		String	Contains the same value that was specified in the Trade Capture Report message sent to HF MEFFGate.
					On cancellation, it contains the value of the original message.
					0 (New): Indicates an initial trade request
			0 = New		
487	TradeReportTransType	N	1 = Cancel	Int	1 (Cancel): Indicates the trade request has been cancelled
			2 = Replace		
					2 (Replace): Indicates the trade request has been modified (i.e. because has been accepted by the member counterparty)
828	TrdType	N	See table 4 of document "Codification Tables" for details of the Trade Type codes	Int	Trade type. This value is used in conjunction with TrdSubType [829]
829	TrdSubType	N	See table 4 of document "Codification Tables" for details of the Trade Type codes	Int	This value is used in conjunction with TrdType [828]

Tag	Name	Req	Valid values	Format	Description
325	UnsolicitedIndicator	N	N,Y	Boolean	Contains "Y" when the message is sent as the result of a trade request
818	SecondaryTradeReportID	N		String	Trade request unique identifier assigned by MEFF.  The Trade Capture Report messages, sent by the client application to accept or reject the trade request, must reference this information in the field SecondaryTradeReportRef ID [881]
820	TradeLinkID	N		String	Identifier sent by the MEFFGate client to associate a group of cross trades together
	Start <Instrument>				
55	Symbol	Y	Contract code	String(22)	Contract code
48	SecurityID	N	See table 7 in document "Codification Tables" for a list of possible values	String	Underlying asset
22	SecurityIDSource	N	8 = Exchange symbol	String	
167	SecurityType	N	See table 6 of document "Codification Tables" for details of the Trade Type codes	String	Product type
541	MaturityDate	N		LocalMktDate	Expiration date
202	StrikePrice	N		Price	Exercise price
231	ContractMultiplier	N		Float	Conversion factor between price units and monetary units
1193	SettlMethod	N	C = Cash settlement required P = Physical settlement required	Char	Settlement method for this security
1194	ExerciseStyle	N	0 = European 1 = American	Int	Type of exercise of this security

Tag	Name	Req	Valid values	Format	Description
201	PutOrCall	N	0 = Put 1 = Call	Int	Indicates whether an option contract is a put or call
1244	FlexibleIndicator	N	Y = Flexible N = Standard (default)	Boolean	Used to indicate if this security has been defined as flexible according to "non-standard" means.  When not informed, means "N = Standard "
864	NoEvents	N		NumInGroup	
→865	EventType	N	134 = Adjustments rule  135 = Indicates if a RFQ must be generated when the cross trade can't be accepted for overcoming the LIS	Int	When EventType [865] = 134, contains the adjustments rule: E = Extraordinary dividend adjustments only ( T = Total
→868	EventText	N		String	DO NOT send this field on securities where adjustments don't apply  When EventType [865] = 135, indicates if a RFQ must be generated when the cross trade can't be accepted for overcoming the LIS:  Y = Yes N = No
End <Instrument>					
32	LastQty	N		Qty	Volume bought/sold in the cross trade described.
31	LastPx	N		Price	Average price in the cross trade described. If this cross trade is expressed through an effective amount, GrossTradeAmt [381], this is the rounded transaction price.

Tag	Name	Req	Valid values	Format	Description
574	MatchType	N	See codification table 22	String	Describes the cross trade state
	Start <TrdCapRptSideGrp>				
552	NoSides	Y	2	NumInGroup	
→ 54	Side	Y	1 = Buy 2 = Sell	Char	Position that the party takes in the cross trade
	Start <Parties>				
→453	NoPartyIDs	N		NumInGroup	Number of parties
→→ 448	PartyID	N		String	See section 4.3 - Parties block
→→ 447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID  4 = Authenticating Firm  7 = Entering Firm  11 = Order Origination Trader	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Else value "D"
→→ 452	PartyRole	N	12 = Execution within Firm ID  13 = Order Origination Firm  36 = Entering Trader  122 = Investment Decision within Firm ID	Int	
→→80 2	NoPartySubIDs	N		NumInGroup	Number of sub-identifiers.  This sub-group is only present when PartyRole [452] = 11
→→→ 523	PartySubID	N		String	Phone number and contact name of the buyer/seller order origination trader

Tag	Name	Req	Valid values	Format	Description
→→→ 803	PartySubIDType	N	7 = Phone number 9 = Contact name	int	
	End <Parties>				
→ 1	Account	N		String	Account code
→ 581	AccountType	N	1 = On behalf of third parties 3 = House trader	Int	Capacity indicator (only for cash market trades)
→ 58	Text	N		String(15)	Reference
→ 232	NoStipulations	N		NumInGroup	
			CL_ID_CMT = Short code Client identification for the cash market leg		
			INV_DEC_ID_CMT = Short code to identify the party for the Investment Decision within Firm for the cash market leg		
→→ 233	StipulationType	N	INV_EXE_ID_CMT = Short code to identify the party for the Execution within Firm for the cash market leg	String	
			TR_CAP_CMT = Trading capacity for the cash market leg		
			CL_ACCT_COD_CMT = Client account code for the cash market leg		
→→ 234	StipulationValue	N		String	When StipulationType [233] = CL_ID_CMT, it contains the short code Client identification for the cash market leg. This is an



Tag	Name	Req	Valid values	Format	Description
					unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = INV_DEC_ID_CMT, it contains the short code to identify the party for the Investment Decision within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = INV_EXE_ID_CMT, it contains the short code to identify the party for the Execution within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = TR_CAP_CMT , it contains the Trading capacity for the cash market leg. Los posibles valores son: AOTC MTCH DEAL
					When StipulationType [233] = CL_ACCT_COD_CMT, it contains the Client account code for the cash market leg
	End <Stipulations>				
	Start <OrdAttrib>				
→259 3	NoOrderAttributes	N		NumInGroup	
→→25 94	OrderAttributeType	N	3 = Risk reduction order	String	
→→25 95	OrderAttributeValue	N		String	When OrderAttributeType [2594] = 3, indicates a Risk reduction order. Valid values: Y = In the context of ESMA RTS 22 Article 4(2)(i), when OrderAttributeValue(2595) =Y, it signifies that the

Tag	Name	Req	Valid values	Format	Description
					commodity derivative order is a transaction "to reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU" N = The commodity derivative order does NOT reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU"
	End <OrdAttrib>		1 = "AOTC"		
→29	LastCapacity	N	3 = "MTCH" 4 = "DEAL"	Char	Trading capacity
	End <TrdCapRptSideGrp>				
1390	TradePublishIndicator	N	0 = Do Not Publish 1 = Publish 2 = Delta: Do Not Publish	Int	Indicates if the trade should be published or not
1011	MessageEventSource	N	C = Cross trades	String	Type of transaction
381	GrossTradeAmt	N		Amt	Effective amount. This value is use instead of the price (LastPx [31])
1328	RejectText	N	See codification table 26	String	When MatchType [574] = A, 5 or 6, identifies the reason for rejection.
	Standard Trailer	Y			

## 12 Request for Quote modality

### 12.1 Introduction

The Request for Quote modality allows HF MEFFGate clients to request private quotes to a subset of the market members and/or brokers or to all of them. Answers to the request are sent to the originator, who can choose the one or ones that better fit his interest.

### 12.2 Description

When a trader wishes to request quotes for a contract or a strategy in the RFQ modality the message Quote Request must be used. If necessary, before that a strategy can be created by using the message Security Definition Request (see section 8 - Strategies).

The Quote Request can be addressed to one or several members and Arranging Brokers (up to 50 destinations) or to the whole market. The requester can also be one of the destinations. The corresponding contract or strategy must be specified, together with the volume (fields Symbol [55] and OrderQty [38]). Optionally a sign and an indicative, a firm price can be included (fields Side[54], Price[44]-QuoteType[537]). Also is mandatory to indicate whether a delay in the post-trading information publication is desired or not. Since from the point of view of Regulation a RFQ has to be recorded as an order, all mandatory fields in an order must also be filled: client, decision ID, execution ID, trading capacity. An RFQ with a firm price can only have one destination member.

Quote Requests that don't result in the creation of an RFQ due to errors or any other cause will be answered with a Quote Request Reject.

Quote Requests resulting in the creation of an RFQ will be assigned by the system with a unique ID valid for the session day, in the field IOIID [23]. The system will send a couple of Quote Response messages (one for the requester and one for the destination) for each member destination included in the Quote Request. In these messages each party receives the confirmation of the relevant data of its side and the member and trader code of the counterparty (including contact information if it has been included).

Any public information related to an RFQ (to be published or not according to MiFIR pre-transparency criteria and applicable waivers) will include the same identification in the IOIID [23] of the Indication Of Interest message and the MDStreamID [1500] in the Market Data Snapshot Full Refresh message.

The destinations willing to quote, can open one or several conversations to answer one RFQ by using the message Quote Response with QuoteRespType[694] = 2 (Counter). To open a new conversation the member must fill the QuoteID [117] field with a 0, and the system will answer with a Quote Response message with the new conversation code assigned by the system (QuoteID [117]) and the field QuoteRespID with the same contents as the request. The system assigns a history number to each notification within a conversation, included in the field QuoteMsgID [1166].

The destination member must include price and volume in the opposite side to the one requested by the requester, or at least in one of them if it was undisclosed (BidPx and BidSize, or OfferPx and OfferSize).

In case the RFQ has been initiated without a firm price, the answers sent by offering trades will not be executable by the requester (nor published) until the requester sends a Quote Response message with action 4 - Make RFQ firm. In this moment all active offers will move from status "Indicative" to "Firm". There's a maximum time to perform this action. RFQ created with a firm price (only one destination) don't require this action.

Once a conversation is started, both the destination member and the requester can modify their respective prices and the rest of data. To do that they can send a Quote Response message with QuoteRespType[694] = 2 (Counter), including the RFQ id (IOIID [23]), the conversation id (QuoteID [117]) and the last history number to whom they want to answer (QuoteMsgID [1166]) that must always be the last one received (in order to avoid problems with on-the-fly messages).

News regarding a conversation are notified to both parties with additional Quote Response messages.

It is not supported the modification of RFQ data outside a conversation. Therefore if any data need to be modified (greater volume) before receiving any answer, the RFQ must be cancelled and a new one must be created. In this example, if conversations have already started, the requester can also notify individually to all the partners the new volume.

The requester can cancel a RFQ by sending a Quote Response message with QuoteRespType[694] = 5 (Done Away). In this case it is not necessary to include a conversation id (QuoteID [117]) or history number (QuoteMsgID [1166]).

A RFQ can also be automatically cancelled if the maximum established time for its completion is exceeded.

RFQ in status MatchType[574] = O (Firm) can be accepted by the requester and RFQ in status MatchType[574] = N (Firm Requester) can be accepted by the destination party. A Quote Response message must be sent with QuoteRespType [694] = 1 (Hit) or 7 (End Trade, only available to the requester) and with the prices and volumes in both sides matching. The volume that will be matched will be the minimum between OrderQty and the volume in the opposite side (BidSize, OfferSize). To send QuoteRespType=7 (End Trade) has the same consequences as sending a 1 (Hit) and then a 5 (Done Away).

Once accepted the RFQ, in case any of the parties (requester and/or quoting party) is an Arranging Broker, the system will send Trade Capture Report messages (see chapter 0) to the intermediated members in order to obtain their corresponding validation.

When the RFQ is finally registered, MatchType[574] = 9, both the requester and the destination member receive the corresponding Execution Report messages (ExecType = F, Trade). The CrossID [548] field of the Execution Report message contains the QuoteID [117] (Conversation ID) value assigned by the quoting party.

All RFQ are cancelled at end of session.

## 12.3 Message list

Message	Description
Quote Request (Msg Type = R)	Message sent by the HF MEFFGate client to request a quote
Quote Response sent by HF MEFFGate (RFQ status) (Msg Type = AJ)	Message sent by HF MEFFGate to notify the RFQ situation (both to requester and destinations)
Quote Response sent to HF MEFFGate (Msg Type = AJ)	Message sent by the HF MEFFGate client to answer a Quote Response (both requester and destinations)
Business Message Reject (MsgType = j)	Message sent by HF MEFFGate to reject a Quote Response
Quote Request Reject rejecting a Quote Request (Msg Type = AG)	Message sent by HF MEFFGate to reject a Quote Request

## 12.4 Message flow

### Request for Quote to two members, one of them answers, and requester accepts


The requester (A008) sends a Request for Quote for 100 A contracts to two members (A007 and A009). The system announces the request with status M (indicative) with two Quote Response messages to each member couple (requester-destination). The requester member A008 receives as many Quote Response messages as destination members.

The destination member A007 sends a buying offer with price 333.33. The offer is confirmed to A007 and announced to A008.


The requester send a Quote Response message with QuoteRespType [694] = "4" (Make RFQ firm). In this moment all active offers will move from status from "Indicative" to "Firm". There is a limited period of time to carry out this action.

The system checks the nominal amount of the order response in order to be published or not according to MiFIR pre-transparency criteria and applicable waivers.

The requester A008 accepts including his side (2=Sell), his price (the same as the quoted price) and QuoteRespType=7 (End Trade). Members A007 and A008 receive the confirmation of the acceptance (also with the corresponding Execution Report messages) and members A009 and A008 receive the cancellation of their conversation.

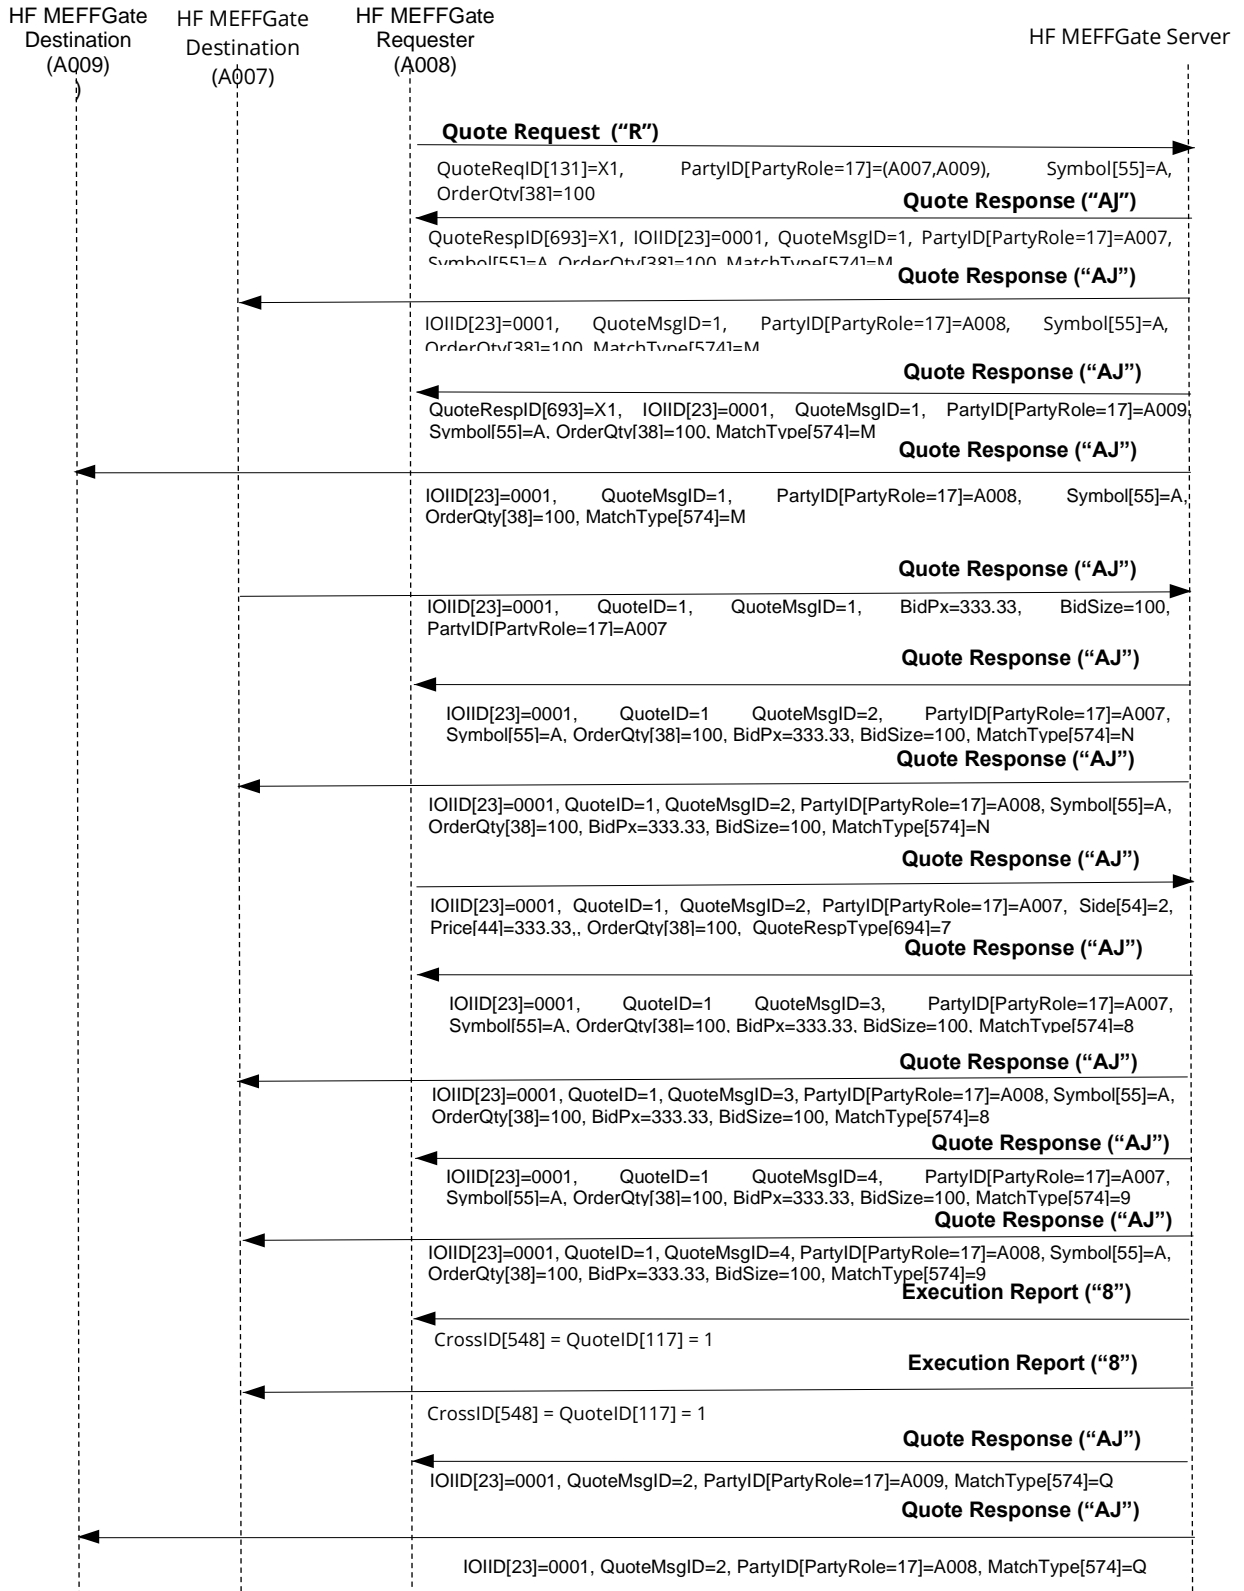

## Request for Quote rejected by HF MEFFGate

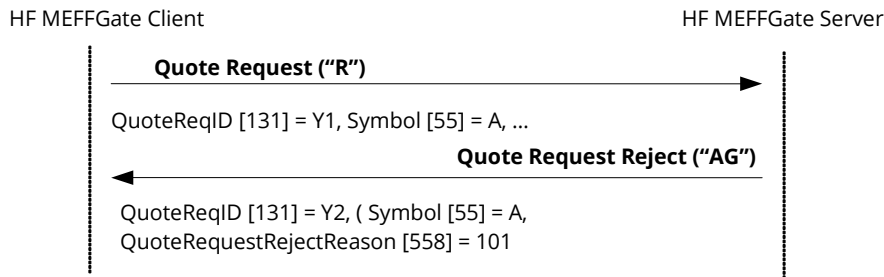

### 12.5 Annotations and adaptations of FIX 5.0

- In message Quote Request, field OrderQty [38] is required
- In message Quote Response sent to HF MEFFGate, fields IOIID [23] and StipulationValue [234] when StipulationType [233] = SIDE\_ID are required
- In messages Quote Request, Quote Response sent by HF MEFFGate (RFQ status) and Quote Response sent to HF MEFFGate, the field LastCapacity [29] and the component block OrdAttrib are added.
- In messages Quote Request and Quote Response sent by HF MEFFGate (RFQ status), the fields TradePublishIndicator [1390] is added
- In message Quote Response sent by HF MEFFGate (RFQ status), the fields MatchType [574] and RejectText [1328] are added
- In messages Quote Response sent by HF MEFFGate (RFQ status) and Quote Request Reject rejecting a Quote Request the fields ApplID [1180] and ApplSeqNum [1181] are added

## 12.6 Message definition

### 12.6.1 Quote Request (Msg Type = R)

Message sent by the HF MEFFGate client to request quotes to a subset of market participants or to all market.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = R		
131	QuoteReqID	Y		String (10)	Message identifier
	Start <RootParties>				
1116	NoRootPartyIDs	Y		NumInGroup	
→1117	RootPartyID	N	For RootPartyRole [1119] = 3, 12 or 122, this is an unsigned integer field, greater or equal than 0 and less than 232	String	See section 4.3 - Parties block
→1118	RootPartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID  4 = Authenticating Firm  7 = Entering Firm  12 = Execution within Firm ID  13 = Order Origination Firm  17 = Contra Firm  36 = Entering Trader  122 = Investment Decision within Firm ID	Char	Required if NoPartyIDs is specified: Value "P" for RootPartyRole [1119] = 3, 12 or 122 Value "D" for the rest  Indicates the role taken by the code specified in RootPartyID [1117].  Required if NoRootPartyIDs [1116] is specified.  Value 17 indicates that the contents in RootPartyID[1117] are the member-traders destination of the RFQ. If party 17 is not included the request goes to all market participants. A maximum of 50 explicit contras can be specified  See section 4.3 - Parties block for all the other parties
→1119	RootPartyRole	N		Int	Value 17 indicates that the contents in RootPartyID[1117] are the member-traders destination of the RFQ. If party 17 is not included the request goes to all market participants. A maximum of 50 explicit contras can be specified
	Start <RootSubParties>				
→1120	NoRootPartySubIDs	N		NumInGroup	Number of sub-identifiers.



Tag	Name	Req	Valid values	Format	Description
					This sub-group is only present when RootPartyRole [1119] = 36
→→1121	RootPartySubID	N		String	Phone number and contact name of the buyer/seller order origination trader
→→1122	RootPartySubIDType	N	7 = Phone number 9 = Contact name	int	
	End <RootSubParties>				
	End <RootParties>				
	Start <QuotReqGrp>				
146	NoRelatedSym	Y	1	NumInGroup	Only one instrument. For strategies, please create a strategy before using RFQ with a Security Definition Request
	Start <Instrument>				
→55	Symbol	Y	Contract code	String (22)	
	End <Instrument>				
→537	QuoteType	N	0 = Indicative (default) 1 = Tradeable 1 = Buy 2 = Sell	Int	Use 1 in firm quote requests sent to only one party
→54	Side	N	7 = Undisclosed (default in indicative quotes)	Char	
	Start <OrderQtyData>				
→38	OrderQty	Y*	integer numbers only	Qty	Volume requested
	End <OrderQtyData>				
	Start <Stipulations>				
→ 232	NoStipulations	N		NumInGroup	
			CL_ID_CMT = Short code Client identification for the cash market leg		
→→ 233	StipulationType	N	INV_DEC_ID_CMT = Short code to identify the party for the Investment Decision within Firm for the cash market leg	String	

Tag	Name	Req	Valid values	Format	Description
			<p>INV_EXE_ID_CMT = Short code to identify the party for the Execution within Firm for the cash market leg</p> <p>TR_CAP_CMT = Trading capacity for the cash market leg</p> <p>CL_ACCT_COD_C MT = Client account code for the cash market leg</p>		
					<p>When StipulationType [233] = CL_ID_CMT, it contains the short code Client identification for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232</p> <p>When StipulationType [233] = INV_DEC_ID_CMT, it contains the short code to identify the party for the Investment Decision within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232</p>
→→ 234	StipulationValue	N		String	<p>When StipulationType [233] = INV_EXE_ID_CMT, it contains the short code to identify the party for the Execution within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232</p> <p>When StipulationType [233] = TR_CAP_CMT , it contains the Trading capacity for the cash market leg. Los posibles valores son: AOTC MTCH DEAL</p> <p>When StipulationType [233] = CL_ACCT_COD_CMT, it contains</p>

Tag	Name	Req	Valid values	Format	Description
	End <Stipulations>				the Client account code for the cash market leg
→ 1	Account	N		String(5)	Account code
→44	Price	N		Price	Firm or indicative price depending on QuoteType [537]
	Start <OrdAttrib>				
→2593*	NoOrderAttributes	N		NumInGroup	
→→2594*	OrderAttributeType	N	3 = Risk reduction order	String	
					When OrderAttributeType [2594] = 3, indicates a Risk reduction order. Valid values: Y = In the context of ESMA RTS 22 Article 4(2)(i), when OrderAttributeValue(2595)=Y, it signifies that the commodity derivative order is a transaction "to reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU" N = The commodity derivative order does NOT reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU"
→→2595*	OrderAttributeValue	N		String	
	End <OrdAttrib>				
			1 = "AOTC"		
→29*	LastCapacity	N	3 = "MTCH" 4 = "DEAL"	char	Trading Capacity MiFIR
	End <QuotReqGrp>				
58	Text	N		String(15)	Reference
			0 = Do Not Publish		
1390*	TradePublishIndicator	N	1 = Publish (Default) 2 = Delta: Do Not Publish	Int	Indicates if the trade should be published or not.  Not informing this tag means the trade should be published.
	Standard Trailer	Y			

## 12.6.2 Quote Response sent by HF MEFFGate (RFQ status) (Msg Type = AJ)

Message sent by HF MEFFGate to communicate to requester and destination the status of a RFQ.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = AJ		
1180*	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181*	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information Message identifier.
693	QuoteRespID	Y		String	The answer to the party that triggers a message will receive here the corresponding QuoteReqID [131] or QuoteRespID [693].  For the rest of parties it contains "NONE".
117	QuoteID	N		String	Conversation ID entered by the quoting party (unique for each IOIID and counterparty).  Field not sent while no offers are made.
1166	QuoteMsgID	N		String	History number within a conversation
694	QuoteRespType	Y	0	Int	This field should not be considered, and is included as requirement of the standard
23	IOIID	N		String	RFQ identifier as assigned by the system
537	QuoteType	N	0 = Indicative 1 = Tradeable	Int	
574*	MatchType	N	See codification table 24	String	
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	See section 4.3 - Parties block
→448	PartyID	N		String	
→447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Value "D" for the rest
→452	PartyRole	N	3 = Client ID	Int	Indicates the role taken by the code specified in PartyID [448].

Tag	Name	Req	Valid values	Format	Description
			4 = Authenticating Firm		Only one party 17 and one 37 will be received in each message
			7 = Entering Firm		
			11 = Order Origination Trader		
			12 = Execution within Firm ID		
			13 = Order Origination Firm		
			17 = Contra Firm		
			36 = Entering Trader		
			37 = Contra Trader		
			122 = Investment Decision within Firm ID		
	Start <SubParties>				
	Number of sub-identifiers.				
→802	NoPartySubIDs	N		NumInGroup	This sub-group is only present when PartyRole [452] = 36
→→523	PartySubID	N		String	Phone number and contact name of the buyer/seller order origination trader
→→803	PartySubIDType	N	7 = Phone number 9 = Contact name	int	
	End <SubParties>				
	End <Parties>				
	Start <Instrument>				
55	Symbol	Y		String (22)	Contract code
48	SecurityID	N		String(12)	ISIN security code
22	SecurityIDSource	N	4 = ISIN Number	String	
	End <Instrument>				
			1 = Buy		
			2 = Sell		
54	Side	N	7=Undisclosed (default in public quotes públicos or indicatives)	Char	Requester side
	Start <OrderQtyData>				
38	OrderQty	N		Qty	Volume requested Will be 0 in cancellations
	End <OrderQtyData>				

Tag	Name	Req	Valid values	Format	Description
	Start <Stipulations>				
232	NoStipulations	N	SIDE_ID	NumInGroup	
			RTS24_21		
			RTS24_21_BUY		
			RTS24_21_SELL		
			CL_ID_CMT = Short code Client identification for the cash market leg		
			INV_DEC_ID_CMT = Short code to identify the party for the Investment Decision within Firm for the cash market leg		"RTS24_21" is for the requester and destination
→233	StipulationType	N	INV_EXE_ID_CMT = Short code to identify the party for the Execution within Firm for the cash market leg	String	"RTS24_21_BUY" and "RTS24_21_SELL" are for destination
			TR_CAP_CMT = Trading capacity for the cash market leg		
			CL_ACCT_COD_CMT = Client account code for the cash market leg		
					When StipulationType [233] = "SIDE_ID" the possible values are: I = Message addressed to the Requester D = Message addressed to the Destination
→234	StipulationValue	N		String	When StipulationType [233] = "RTS24_21", "RTS24_21_BUY" or "RTS24_21_SELL", according to RTS 24, the valid values are: NEWO = New order NECP = New order of the counterparty REME = Replaced by initiative of message receiver

Tag	Name	Req	Valid values	Format	Description
					<p>REMA = Replaced by Market Surveillance (automatic)</p> <p>REMH = Replaced by Market Surveillance (manual)</p> <p>RECP = Replaced due to change in the counterparty order</p> <p>CAME = Cancellation by initiative of message receiver</p> <p>CAMO = Cancellation by Surveillance</p> <p>CACP = Cancellation by counterparty</p> <p>REMO = Rejection</p> <p>EXPI = Order expired</p> <p>PARF = Partial fill</p> <p>FILL = Filled</p> <p>CHME = Change of status at the initiative of the member/participant of the trading venue</p> <p>CHMO = Change of status due to market operations</p> <p>When StipulationType [233] = REF_RFQ, it contains the reference</p> <p>When StipulationType [233] = CL_ID_CMT, it contains the short code Client identification for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232</p> <p>When StipulationType [233] = INV_DEC_ID_CMT, it contains the short code to identify the party for the Investment Decision within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232</p> <p>When StipulationType [233] = INV_EXE_ID_CMT, it contains the short code to identify the party for the Execution within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232</p> <p>When StipulationType [233] = TR_CAP_CMT, it contains the</p>

Tag	Name	Req	Valid values	Format	Description
					Trading capacity for the cash market leg. Los posibles valores son: AOTC MTCH DEAL
	End <Stipulations>				When StipulationType [233] = CL_ACCT_COD_CMT, it contains the Client account code for the cash market leg
1	Account	N		String(5)	Account code
	Start <OrdAttrib>				
2593*	NoOrderAttributes	N		NumInGroup	
→2594*	OrderAttributeType	N	3 = Risk reduction order	String	
					When OrderAttributeType [2594] = 3, indicates a Risk reduction order. Valid values: Y = In the context of ESMA RTS 22 Article 4(2)(i), when OrderAttributeValue(2595)=Y, it signifies that the commodity derivative order is a transaction "to reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU" N = The commodity derivative order does NOT reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU"
→2595*	OrderAttributeValue	N		String	
	End <OrdAttrib>				
			1 = "AOTC"		
29*	LastCapacity	N	3 = "MTCH" 4 = "DEAL"	Char	Trading Capacity MiFIR
132	BidPx	N		Price	Firm buy price of the quoting party
133	OfferPx	N		Price	Firm sell price of the quoting party
134	BidSize	N		Qty	Firm buy volume of the quoting party
135	OfferSize	N		Qty	Firm sell volume of the quoting party
60	TransactTime	N		UTC Timestamp	Timestamp when the business transaction represented by the message occurred
58	Text	N		String(15)	Reference
44	Price	N			Requester Price



Tag	Name	Req	Valid values	Format	Description
1328*	RejectText	N	See codification table 23	String	When MatchType [574] = B contains further information about reject reason
1390*	TradePublishIndicator	N	0 = Do Not Publish 1 = Publish (Default) 2 = Delta: Do Not Publish	Int	Indicates if the trade should be published or not.  Not informing this tag means the trade should be published.
	Standard Trailer	Y			

### 12.6.3 Quote Response sent to HF MEFFGate (Msg Type = AJ)

Message sent by a HF MEFFGate client to answer or modify a RFQ.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = AJ		
693	QuoteRespID	Y		String (10)	Message identifier
117	QuoteID	N	Unsigned integer field, greater than 0 and less than 2 <sup>31</sup>	String	Conversation ID entered by the quoting party (unique for each IOIID and counterparty).  Mandatory except if QuoteRespType[694]=5
1166	QuoteMsgID	N		String	History number within a conversation to which this Quote Response refers. It avoids problems with on-the-fly messages.  Mandatory except when QuoteRespType[694] is 5 or 6
694	QuoteRespType	Y	1 = Hit 2 = Counter 4 = Make RFQ firm 5 = Done Away 6 = Pass 7 = End Trade	Int	Value 1 to accept one offer and keep the rest  Value 2 to make a counter offer  Value 4 to make executable the received offers and publish (requester)  Value 5 to cancel all remaining RFQ conversations (requester)  Value 6 to decline (destination)/cancel (requester) a conversation  Value 7 to accept one offer and cancel the rest (requester)
23	IOIID	Y*		String	RFQ identifier as assigned by the system
537	QuoteType	N	0 = Indicative (default) 1 = Tradeable	Int	Ignored for messages not entered by the requester
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N	For PartyRole [452] = 3, 12 or 122, this is an unsigned integer field, greater or equal than 0 and less than 2 <sup>32</sup>	String	See section 4.3 - Parties block

Tag	Name	Req	Valid values	Format	Description
→447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier	Char	Required if NoPartyIDs is specified: Value "P" for PartyRole [452] = 3, 12 or 122 Value "D" for the rest
→452	PartyRole	N		Int	Indicates the role taken by the code specified in PartyID [448].  Required if NoPartyIDs [453] is specified.  Only one party 17 and one 37 will be received in each message
	Start <SubParties>				
→802	NoPartySubIDs	N		NumInGroup	Number of sub-identifiers.  This sub-group is only present when PartyRole [452] = 36
→→523	PartySubID	N		String	Phone number and contact name of the buyer/seller order origination trader
→→803	PartySubIDType	N	7 = Phone number  9 = Contact name	int	
	End <SubParties>				
	End <Parties>				
	Start <Instrument>				
55	Symbol	Y		String (22)	Contract code
	End <Instrument>				
54	Side	N	1 = Buy  2 = Sell  7 = Undisclosed	Char	The requester must indicate 1 or 2 when entering a firm Price (Counter) or accepting an offer (Hit, End Trade).  Ignored in any other case
	Start <OrderQtyData>				
38	OrderQty	N	Integer numbers only	Qty	Mandatory for the requester when entering a firm Price (Counter) or accepting an offer (Hit, End Trade)
	End <OrderQtyData>				
	Start <Stipulations>				
232	NoStipulations	Y*		NumInGroup	
→ 233	StipulationType	Y*	SIDE_ID (required)  CL_ID_CMT = Short code Client identification for	String	

Tag	Name	Req	Valid values	Format	Description
			the cash market leg		
			INV_DEC_ID_CM T = Short code to identify the party for the Investment Decision within Firm for the cash market leg		
			INV_EXE_ID_CMT = Short code to identify the party for the Execution within Firm for the cash market leg		
			TR_CAP_CMT = Trading capacity for the cash market leg		
			CL_ACCT_COD_C MT = Client account code for the cash market leg		
					When StipulationType [233] = "SIDE_ID" (required) the possible values are: I = Message sent by the Requester D = Message sent by the Destination
→ 234	StipulationValue	Y*		String	When StipulationType [233] = REF_RFQ, it contains the reference. This is a string field up to 15 characters
					When StipulationType [233] = CL_ID_CMT, it contains the short code Client identification for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = INV_DEC_ID_CMT, it contains the short code to identify the party for the Investment Decision

Tag	Name	Req	Valid values	Format	Description
					within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = INV_EXE_ID_CMT, it contains the short code to identify the party for the Execution within Firm for the cash market leg. This is an unsigned integer field, greater or equal than 0 and less than 232
					When StipulationType [233] = TR_CAP_CMT, it contains the Trading capacity for the cash market leg. Los posibles valores son: AOTC MTCH DEAL
					When StipulationType [233] = CL_ACCT_COD_CMT, it contains the Client account code for the cash market leg
	End <Stipulations>				
1	Account	N		String(5)	Account code
	Start <OrdAttrib>				
2593*	NoOrderAttributes	N		NumInGroup	
→2594*	OrderAttributeType	N	3 = Risk reduction order	String	
					When OrderAttributeType [2594] = 3, indicates a Risk reduction order. Valid values: Y = In the context of ESMA RTS 22 Article 4(2)(i), when OrderAttributeValue(2595)=Y, it signifies that the commodity derivative order is a transaction "to reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU" N = The commodity derivative order does NOT reduce risk in an objectively measurable way in accordance with Article 57 of Directive 2014/65/EU"
→2595*	OrderAttributeValue	N		String	
	End <OrdAttrib>				
			1 = "AOTC"		
29*	LastCapacity	N	3 = "MTCH"	char	Trading Capacity MiFIR

Tag	Name	Req	Valid values	Format	Description
			4 = "DEAL"		
132	BidPx	N		Price	Firm buy price of the quoting party
133	OfferPx	N		Price	Firm sell price of the quoting party
134	BidSize	N		Qty	Firm buy volume of the quoting party
135	OfferSize	N		Qty	Firm sell volume of the quoting party
58	Text	N		String(15)	Reference
44	Price	N		Price	Indicative or firm Price of the requester. Mandatory for the requester when entering a firm Price (Counter) or accepting an offer (Hit, End Trade). Ignored in any other case
	Standard Trailer	Y			

## 12.6.4 Quote Request Reject rejecting a Quote Request (Msg Type = AG)

Message sent by HF MEFFGate to reject a Quote Request

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = AG		
1180 *	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181 *	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
131	QuoteReqID	Y		String	Identifier of the rejected message
658	QuoteRequestReje ctReason	Y	See codification table 23	Int	Rejection motive
	Start <QuotReqRjctGrp>				
146	NoRelatedSym	Y	1	NumInGroup	Always 1
	Start <Instrument>				
→55	Symbol	Y		String (22)	Contract code
→48	SecurityID	N		String(12)	ISIN security code
→22	SecurityIDSource	N	4 = ISIN Number	String	
	End <Instrument>				
	End <QuotReqRjctGrp>				
	Standard Trailer	Y			

## 13 xRolling RFQ modality

### 13.1 Introduction

The xRolling Request for Quote modality allows HF MEFFGate clients to request to a subset of the market Liquidity Providers to initiate a buy or sell operation of a xRolling contract. In order to do that, the selected Liquidity Provider will buy or sell the corresponding Stock in the Stock Exchange. For each Stock bought or sold, the Liquidity Provider will sell or buy to the xRolling Requesting Party a xRolling contract at the same price, so that the Liquidity Provider is always covered in the xRolling underlying position.

### 13.2 Description

#### 13.2.1 Standard xRolling RFQ transactions

When a trader intends to buy or sell a xRolling, in the first place it has to obtain a Liquidity Provider to execute the corresponding stock transaction at the Stock Exchange.

In order to do so, the message Quote Request will be used informing a Liquidity Provider code, a list of Liquidity Provider codes (ordered following its preferences) or an asterisk (to indicate that the request has to be sent to all Liquidity Providers with a relationship with the requesting Member, without any special order of preference). In case the Liquidity Provider is preselected (just one Liquidity Provider), the Quote Request type will be QuoteType[537]=4 (InitiallyTradeable). Otherwise it will be QuoteType[537]=2 (RestrictedTradeable).

The Quote Request will include the selected contract, volume, size, and limit price (fields Symbol[55], OrderQty[38], Side[54], Price[44]). Since from the point of view of Regulation a RFQ has to be recorded as an order, all mandatory fields in an order must also be filled: client, decision ID, execution ID, trading capacity.

Quote Requests that don't result in the creation of an RFQ due to errors or any other cause will be answered with a Quote Request Reject.

The system will assign each valid RFQ a unique identification per session, which is included in the field IOIID[23] of the Quote Response messages that will be subsequently published with the status of each conversation. Within each RFQ, the system will assign a code (QuoteID[117]) to each conversation between a xRolling Requesting Party and a Liquidity Provider. Finally, within each conversation the system assigns a history number to each notification message (QuoteMsgID[1166]).

Every time the status of a xRolling RFQ conversation changes, the system publishes a pair of Quote Response messages (one for the Requesting Party and one for the Liquidity Provider). These messages contain the relevant data to each side, and the Member code and Trader code of the counterparty. The initial status of a xRolling RFQ conversation is MatchType[574]=N (Firm).

Any public information related to an RFQ (to be published as market data information or not according to MiFIR pre-transparency criteria and applicable waivers) will include the same identification in the IOIID [23] of the Indication Of Interest message and the MDStreamID [1500] in the Market Data Snapshot Full Refresh message.

The Liquidity Providers can accept or reject the request to handle the corresponding order at the Stock Exchange. In order to accept it, a Quote Response message with QuoteRespType[694]=2 (Counter) has to be used. The new status of the RFQ conversation will be MatchType[574]=T (Accepted by LP) in case there's several potential Liquidity Providers, or MatchType[574]=U (Liquidity Provider selected) in case there's only one Liquidity Provider in the original request, or



if the preferred Liquidity Provider accepts the request. The code QuoteRespType[694]=6 (Pass) is used to reject a request, resulting in a status MatchType[574]=P (Cancelled by destination).

When there's more than one potential Liquidity Provider, the system will select, among all LPs that have accepted the request, the one that will effectively be assigned. In case the requester has included an order of preference, the system will select the preferred one among the ones that have accepted it in a predetermined period of time. In case the requester hasn't established the order of preference, the system will select the Liquidity Provider corresponding to the first accepting Quote Response message processed. Once a Liquidity Provider has been selected, the system will publish a pair of Quote Response messages with QuoteType[537]=4 (InitiallyTradeable) and a MatchType[574]=U (Liquidity Provider selected) to indicate to the Liquidity Provider that it can proceed with the Stock Exchange transactions. The rest of conversations are cancelled.

From that moment, the Liquidity Provider will enter the corresponding order in the Stock Exchange, and will inform about the status of the order by using Execution Report messages, as included in section 13.6.5. The system publishes the implicit status of the xRolling orders based on the information received from the LP, by sending Execution Report Ack messages both to the xRolling Requesting Party and to the Liquidity Provider.


Any execution of the order in the Stock Exchange will be notified by the LP by using an Execution Report with type ExecType[150]=F (Trade). When this happens, the MEFF system will create the corresponding trade in the xRolling contract between the xRolling Requesting Party and the Liquidity Provider. It will be published with messages Execution Report (7.9.4), as any other trade (but with trade type '4', specific for this type of transactions).

At any moment, even when the corresponding order is alive at the Stock Exchange, the xRolling Requesting Party can request the cancellation by using a Quote Response message with QuoteRespType[694]=5 (Done Away). If the request is entered once it is InitiallyTradeable, the cancellation cannot be considered as completed until the Liquidity Provider confirms that the order at the Stock Exchange has been cancelled. Then, the requester will receive the corresponding Execution Ack indicating that the QuoteID has been cancelled.

The Liquidity Provider can also cancel the request at any moment, by using a Quote Response with QuoteRespType[694]=6 (Pass). Once received this notification, no additional execution reports will be admitted.

All the RFQs are implicitly cancelled at the end of the trading session. Therefore the Liquidity Provider must send Day Limit orders to the Stock Exchange.

### 13.2.2 State of RFQ conversations

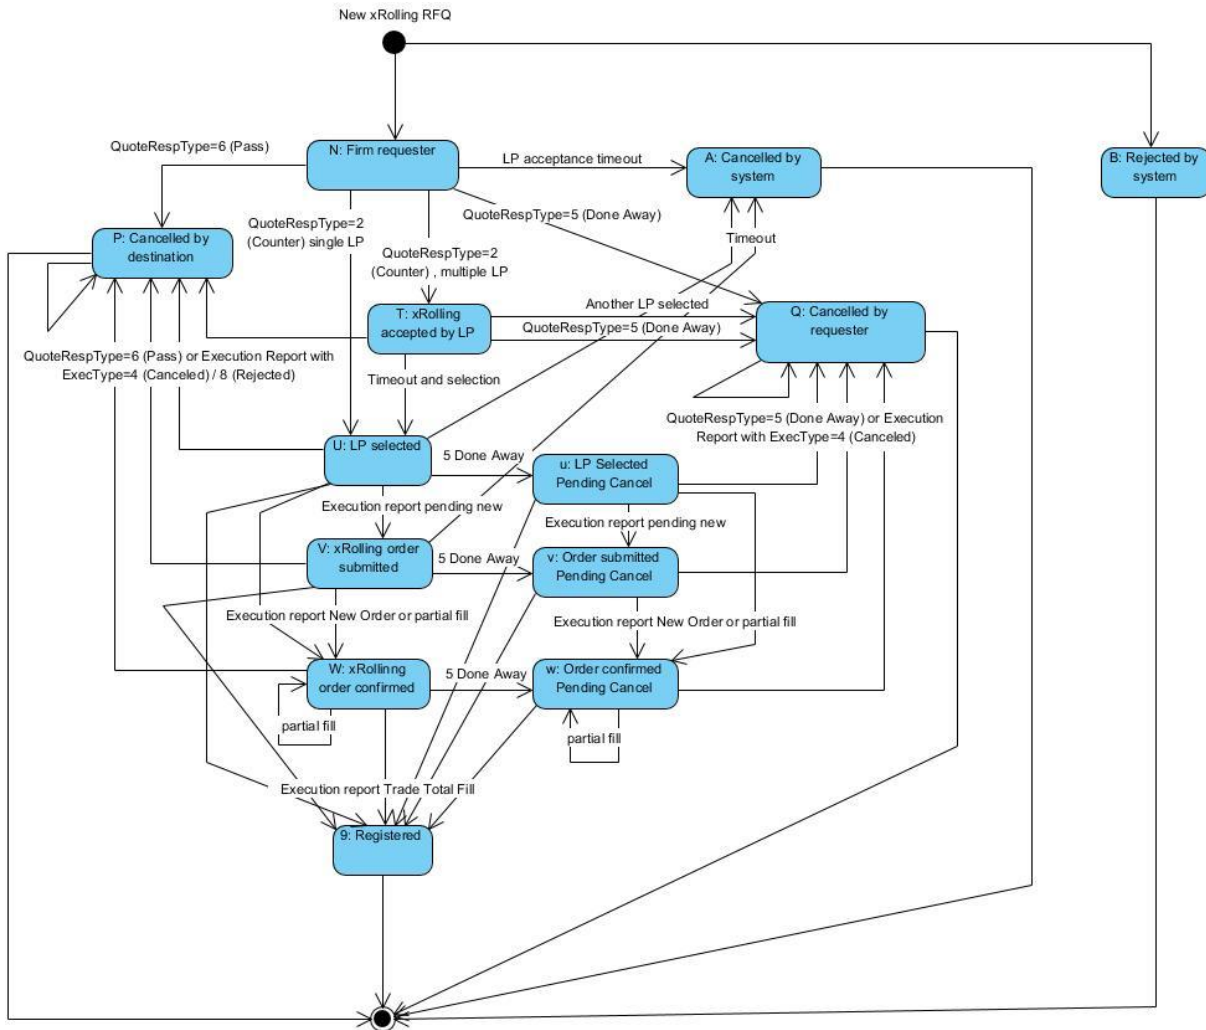

### 13.2.3 Compatibility with order messages for xRolling Requesting Party

The xRolling Requesting Partys that have a single Liquidity Provider can also use order messages to initiate and cancel a Stock xRolling RFQ. Modification messages are not allowed.

In order to do so, the Requesting Party can send a Limit Order on the xRolling contract. The system will automatically convert it into an RFQ. The field included as the CIOrdID will be copied into the QuoteReqID of the RFQ. The order message will be answered with all the sequence of Quote Response messages described in the previous sections, and no Execution Report will be used to confirm it. Nevertheless, the client application could decide to ignore them and base its behavior on the information received in the Execution Ack messages (implicit status of the order, based on the Order Status in the Stock Exchange) and in the Execution Reports (registered trades). The structure of the Execution Ack messages is very similar to the Execution Report structure.

### 13.3 Message list

Message	Description
Message definition Quote Request for xRolling (Msg Type = R)	Message sent by the HF MEFFGate client to request a xRolling RFQ
New Order - Single (Msg Type = D)	Message sent by the HF MEFFGate client to enter an order on a xRolling, that can potentially be converted into a xRolling RFQ
Quote Response sent to HF MEFFGate (Msg Type = AJ)	Message sent by HF MEFFGate notifying the status of an RFQ
Business Message Reject (MsgType = j) Business Message Reject (MsgType = j)	Message sent by HF MEFFGate to reject a Quote Response message
Quote Request reject to answer a Quote Request (Msg Type = AG)	Message sent by HF MEFFGate to reject a Quote Request message
Quote Response about xRolling conversation sent by Liquidity Provider (Msg Type = AJ)	Message sent by the LP to manage a xRolling RFQ previously received
Quote Response to cancel xRolling by initiator (Msg Type = AJ)	Message sent by the xRolling Requesting Party to request the cancellation of an RFQ
Order Cancel Request (Msg Type = F)	Message sent by the xRolling Requesting Party to request the cancellation of an RFQ previously entered using a New Order Single message
Execution Report sent by the Liquidity Provider to notify order status in the Stock Exchange (Msg Type = 8)	Message sent by the LP to inform about the status of the order sent to the Stock Exchange, including trades and unsolicited events.
Execution Ack for the Liquidity Provider (Msg Type = BN) Execution Ack for the Liquidity Provider (Msg Type = BN)	Message sent by HF MEFFGate to the LP to acknowledge the reception of the previous Execution Report
Execution Ack for the xRolling	Message sent by HF MEFFGate to the xRolling Requesting Party inform about the implicit status of the xRolling order, based on the status of the order in the Stock Exchange.
Execution Report to notify executions in the xRolling RFQ trading mode (Msg Type=8)	Message sent by HF MEFFGate to the parties of a xRolling trade.

### 13.4 Message flow

#### xRolling RFQ request to two Liquidity Providers, answer of one Liquidity Provider and trade execution in the Stock Exchange


The initiator (DR1) sends a RFQ to two Liquidity Providers (PL1, PL2). The system publishes these requests in status N (Firm), by using a couple of Quote Response messages to each pair of members (requester-destination). Therefore, the initiator (DR1) receives as many Quote Response messages as Liquidity Providers in the original request.

PL2 confirms its disposition to handle the orders, and therefore the conversation between DR1 and PL2 changes to status T (accepted by LP), and this fact is notified to both parties.

After a predetermined time, the system assigns the Liquidity Provider PL2. The conversation between DR1 and PL2 changes to status U (LP selected) and the conversation between DR1 and PL1 changes to status A (cancelled by system).

Then, PL2 send the order to the Stock Exchange, which is confirmed. PL2 sends the corresponding Execution Report message, which is answered by the system with an Execution Ack. Another Execution Ack is sent to the xRolling requester. The status of the xRolling is now W (xRolling order confirmed).

The order in the Stock Exchange is totally filled. PL2 sends the corresponding Execution Report message, which the system answers with an Execution Ack. Since the execution type is a trade, the system generates the xRolling trade and Execution Report messages are sent. Once the order is totally filled, the xRolling RFQ status is 9 (Registered) and ends its life.

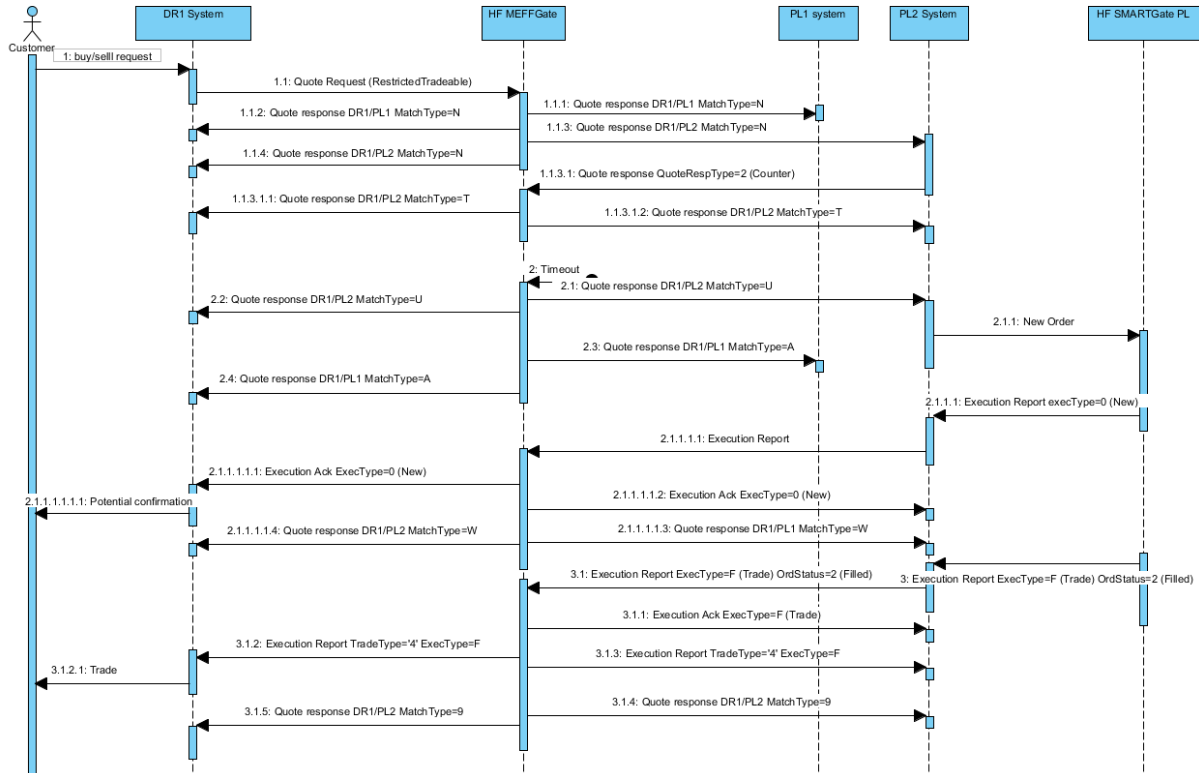


## xRolling order, partial execution and cancellation

The initiator (DR1) sends an order on the xRolling contract. The system converts it automatically into an RFQ in status N (Firm) for its Liquidity Provider PL2. When PL2 accepts the RFQ, it changes directly to status U (LP selected).

Then, PL2 send the order to the Stock Exchange, which is confirmed. PL2 sends the corresponding Execution Report message, which is answered by the system with an Execution Ack. Another Execution Ack is sent to the xRolling requester. The status of the xRolling is now W (xRolling order confirmed).

The order in the Stock Exchange is partially filled. PL2 sends the corresponding Execution Report message, which the system answers with an Execution Ack. The system generates the xRolling trade and Execution Report messages are sent. The xRolling RFQ status remains as W (xRolling order confirmed).

Then the xRolling Requesting Party sends a Cancel Order message. The system converts it into a xRolling cancellation request. The final status Q (canceled by requester) is not achieved until the Liquidity Provider confirms that the order at the Stock Exchange has been canceled.

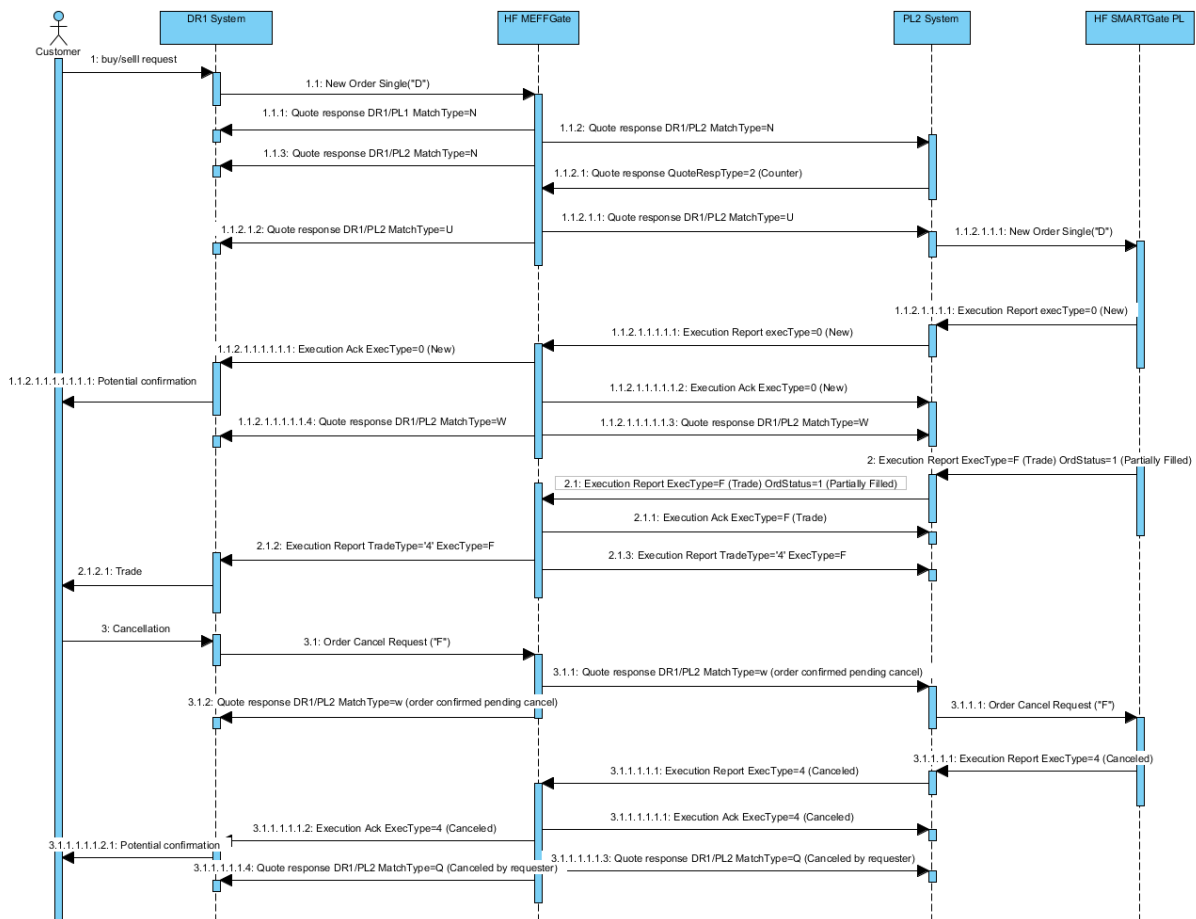


## xRolling RFQ request to one Liquidity Provider, acceptance and cancellation request that cannot be completed due to the simultaneous trade execution in the Stock Exchange

The initiator (DR1) sends a RFQ to one Liquidity Provider (PL2). The system publishes the request in status N (Firm), with Quote Response messages to requester and destination. When PL2 accepts the RFQ, it changes directly to status U (LP selected).


Then, PL2 sends the order to the Stock Exchange, which is confirmed. PL2 sends the corresponding Execution Report message, which is answered by the system with an Execution Ack. Another Execution Ack is sent to the xRolling requester. The status of the xRolling is now W (xRolling order confirmed).

DR1 requests the cancellation with a Quote Response message, but in the meantime, the order in the Stock Exchange is totally filled. PL2 sends the corresponding Execution Report message, which the system answers with an Execution Ack. Since the execution type is a trade, the system generates the xRolling trade and Execution Report messages are sent. Once the order is totally filled, the xRolling RFQ status is 9 (Registered) and ends its life.

The cancellation request is, therefore, rejected.

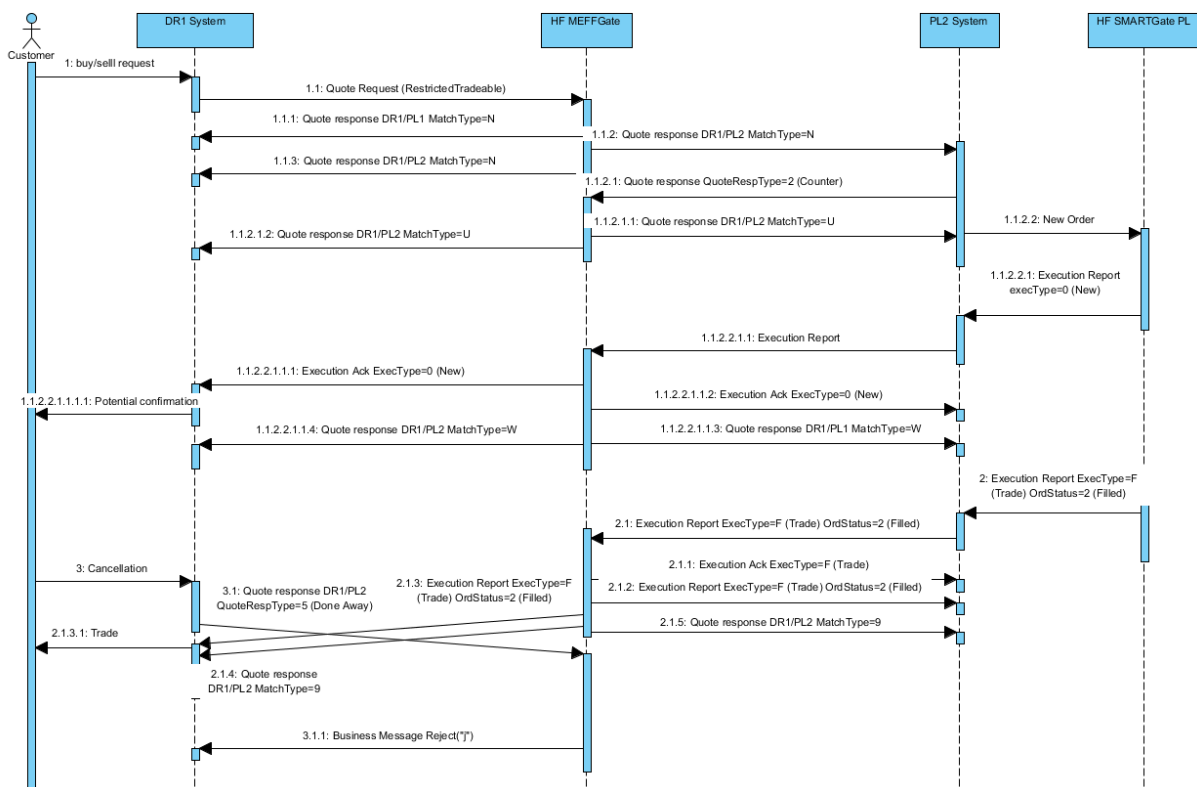

## Request for Quote rejected by HF MEFFGate

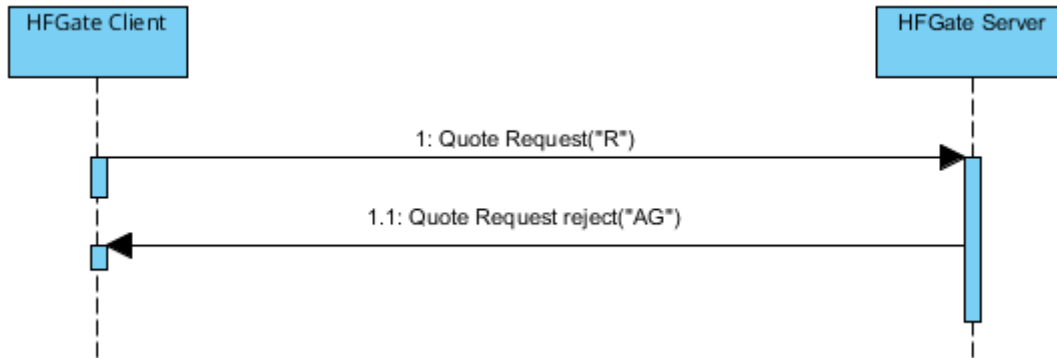

### 13.5 Annotations and adaptations of FIX 5.0

In message Quote Request, field OrderQty [38] is required

In message Quote Response sent to HF MEFFGate, fields IOIID [23] and StipulationValue [234] when StipulationType [233] = SIDE\_ID are required

In messages Quote Request, Quote Response sent by HF MEFFGate (RFQ status) and Quote Response sent to HF MEFFGate, the field LastCapacity [29] and the component block OrdAttrib are added.

In messages Quote Request and Quote Response sent by HF MEFFGate (RFQ status), the fields TradePublishIndicator [1390] is added

In message Quote Response sent by HF MEFFGate (RFQ status), the fields MatchType [574] and RejectText [1328] are added

In messages Quote Response sent by HF MEFFGate (RFQ status) and Quote Request Reject rejecting a Quote Request the fields ApplID [1180] and ApplSeqNum [1181] are added

In the Execution Ack message the blocks Parties and Stipulations, and the fields ExecType[150], OrdStatus[39], Price[44], TradingSessionID[336], LeavesQty[151], CumQty[14], TransactTime[60], Currency[15] have been included.

In Quote Response sent by HF MEFFGate (RFQ status) message, the fields MarketID [1301] and MarketSegmentID [1300] are added.

## 13.6 Message definition

### 13.6.1 Quote Request for xRolling (Msg Type = R)

Message sent by the HF MEFFGate client to request a xRolling RFQ to a Liquidity Provider, a list of Liquidity Providers or to all of them.

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = R		
131	QuoteReqID	Y		String (10)	Message identifier
	Start <RootParties>				See section 4.3 - Parties block
1116	NoRootPartyIDs	N		NumInGroup	Required if NoPartyIDs is specified: Value "P" for RootPartyRole [1119] = 3, 12 or 122 Value "D" for the rest
→1117	RootPartyID	N	Para RootPartyRole [1119] = 3, 12 ó 122, este campo es un integer sin signo, mayor o igual que 0 y menor que 2 <sup>32</sup>	String	
→1118	RootPartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID	Char	Indicates the role taken by the code specified in RootPartyID [1117].
→1119	RootPartyRole	N	11 = Order Origination Trader  12 = Execution within Firm ID  13 = Order Origination Firm  35 = Liquidity Provider  122 = Investment Decision within Firm ID	Int	Required if NoRootPartyIDs [1116] is specified.  Value 35 indicates that the contents in RootPartyID[1117] are the member-traders destination of the RFQ. If party 35 includes an asterisk, the request goes to all available Liquidity Providers. A maximum of 50 explicit LPs can be specified
	End <RootParties>				
	Start <QuotReqGrp>				
146	NoRelatedSym	Y	1	NumInGroup	
	Start <Instrument>	Y*			
→55	Symbol	Y	Contract code	String (22)	
	End <Instrument>				



Tag	Nombre	Req	Valores válidos	Formato	Descripción
→537	QuoteType	N	2 = RestrictedTradeable 4 = InitiallyTradeable	Int	The value 4 indicates a firm RFQ with only one LP who can directly send the corresponding order to the Stock Exchange once it accepts the request.  The value 2 indicates a firm RFQ where the final LP has to be selected among several.
→54	Side	N	1 = Buy 2 = Sell	Char	
Start <OrderQtyData>					
→38	OrderQty	Y*	integer numbers only	Qty	Volume requested
End <OrderQtyData>					
→1	Account	N		String(5)	Account code
→44	Price	N		Price	Limit price
→29*	LastCapacity	N	1 = "AOTC" 3 = "MTCH" 4 = "DEAL"	Char	Trading Capacity MiFIR
→77*	PositionEffect	N	O = Open C = Close	Char	The value C indicates that the existence of balance with the Liquidity Provider to close positions has to be checked
End <QuotReqGrp>					
58	Text	N		String(15)	Reference
	Standard Trailer	Y			

### 13.6.2 Quote Response to notify status of xRolling RFQ (Msg Type = AJ)

Message sent by HF MEFFGate notifying the status of an RFQ

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = AJ		
1180*	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181*	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information Message identifier.
693	QuoteRespID	Y		String	The answer to the party that triggers a message will receive here the corresponding QuoteReqID [131] or QuoteRespID [693].
					For the rest of parties it contains "NONE".
117	QuoteID	N		String	Conversation ID entered by the quoting party (unique for each IOIID and counterparty).
1166	QuoteMsgID	N		String	History number within a conversation
694	QuoteRespType	Y	0	Int	This field should not be considered, and is included as requirement of the standard
					Only for the initiator.
11	ClOrdID	N		String	Identifier entered by the initiator when an order has been converted into an RFQ
23	IOIID	N		String	RFQ identifier as assigned by the system
537	QuoteType	N	2 = RestrictedTradeable 4 InitiallyTradeable	Int	The value 4 indicates a firm RFQ with only one LP who can directly send the corresponding order to the Stock Exchange once it accepts the request.  The value 2 indicates a firm RFQ where the final LP has to be selected among several.
574*	MatchType	N	See codification table 24	String	See section 13.2.2
	Start <Parties>				
336	TradingSessionID	N	118 = xRolling RFQ	String	Trading mode
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N		String	See section 4.3 - Parties block

Tag	Nombre	Req	Valores válidos	Formato	Descripción
→447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier  3 = Client ID	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Value "D" for the rest
→452	PartyRole	N	11 = Order Origination Trader  12 = Execution within Firm ID  13 = Order Origination Firm  35 = Liquidity Provider  60 = Introducing Broker (xRolling Requesting Party)  122 = Investment Decision within Firm ID	Int	Indicates the role taken by the code specified in PartyID [448].
End <Parties>					
Start <Instrument>					
55	Symbol	Y		String (22)	Contract code
48	SecurityID	N		String(12)	ISIN security code
22	SecurityIDSource	N	4 = ISIN Number	String	
End <Instrument>					
54	Side	N	1 = Buy  2 = Sell	Char	Requester side
Start <OrderQtyData>					
38	OrderQty	N		Qty	Volume requested  Will be 0 in cancellations
End <OrderQtyData>					
Start <Stipulations>					
232	NoStipulations	N		NumInGroup	
→233	StipulationType	N	SIDE_ID  RTS24_21  EXEC_VOL	String	"RTS24_21" is for the requester and destination
→234	StipulationValue	N		String	When StipulationType [233] = "SIDE_ID" the possible values are: I = Message addressed to the Requester

Tag	Nombre	Req	Valores válidos	Formato	Descripción
					D = Message addressed to the Destination
					When StipulationType [233] = "RTS24_21" the valid values are: NEWO = New order NECP = New order of the counterparty REME = Replaced by initiative of message receiver REMA = Replaced by Market Surveillance (automatic) REMH = Replaced by Market Surveillance (manual) RECP = Replaced due to change in the counterparty order CAME = Cancellation by initiative of message receiver CAMO = Cancellation by Surveillance CACP = Cancellation by counterparty REMO = Rejection EXPI = Order expired PARF = Partial fill FILL = Filled CHME = Change of status at the initiative of the member/participant of the trading venue CHMO = Change of status due to market operations
					When EXEC_VOL it contains the cumulative volume
	End <Stipulations>				
1	Account	N	1 = "AOTC"	String(5)	Account code
29*	LastCapacity	N	3 = "MTCH" 4 = "DEAL"	Char	Trading Capacity MiFIR
77*	PositionEffect	N	O = Open C = Close	Char	The value C indicates that the existence of balance with the Liquidity Provider to close positions has to be checked
1301*	MarketID	N	See table 2 document "Codification tables"	Exchange	Operating MIC where the order has been entered according to ISO 10383
1300	MarketSegmentID	N	See table 2 document "Codification tables"	String	Segment MIC where the order has been entered according to ISO 10383
60	TransactTime	N		UTC Timestamp	Timestamp when the business transaction represented by the message occurred

Tag	Nombre	Req	Valores válidos	Formato	Descripción
58	Text	N		String	Reference
44	Price	N		Price	Requester Price
1328*	RejectText	N		String	When MatchType [574] = B contains further information about reject reason
	Standard Trailer	Y			

### 13.6.3 Quote Response about xRolling conversation sent by Liquidity Provider (Msg Type = AJ)

Message sent by the LP to manage a xRolling RFQ previously received

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = AJ		
693	QuoteRespID	Y		String (10)	Message identifier
117	QuoteID	N	Unsigned integer field, greater than 0 and less than 2 <sup>31</sup>	String	Conversation ID entered by the quoting party (unique for each IOIID and counterparty).  Mandatory
1166	QuoteMsgID	N		String	History number within a conversation to which this Quote Response refers. It avoids problems with on-the-fly messages.  Mandatory except when QuoteRespType[694] is 6
694	QuoteRespType	Y	2 = Counter 6 = Pass	Int	Value 2 to make an offer  Value 6 to decline (destination)/cancel (requester) a conversation
23	IOIID	Y		String	RFQ identifier as assigned by the system
537	QuoteType	Y*	2 = RestrictedTradeable 4 = InitiallyTradeable	Int	Mandatory to indicate a xRolling related message Either value can be used.
453	NoPartyIDs	N	Start <Parties>	NumInGroup	
→448	PartyID	N	For PartyRole [452] = 3, 12 or 122, this is an unsigned integer field, greater or equal than 0 and less than 2 <sup>32</sup>	String	See section 4.3 - Parties block
→447	PartyIDSource	N	D = Proprietary/Custom code P = Short code identifier 3 = Client ID	Char	Required if NoPartyIDs is specified: Value "P" for PartyRole [452] = 3, 12 or 122 Value "D" for the rest
→452	PartyRole	N	11 = Order Origination Trader  12 = Execution within Firm ID	Int	Indicates the role taken by the code specified in PartyID [448].  PartyRole 3, 12, 35, 60 and 122 are mandatory to make an offer

Tag	Nombre	Req	Valores válidos	Formato	Descripción
			13 = Order Origination Firm		
			35 = Liquidity Provider		
			60 = Introducing Broker (xRolling Requesting Party)		
			122 = Investment Decision within Firm ID		
	End <Parties>				
	Start <Instrument>	Y*			
55	Symbol	Y	Código de contrato	String (22)	Contract code
	End <Instrument>				
54	Side	N	1 = Buy 2 = Sell	Char	The Liquidity Provider must include the same information as in the original request
	Start <OrderQtyData>				
38	OrderQty	N		Qty	The Liquidity Provider must include the same information as in the original request
	End <OrderQtyData>				
	Start <Stipulations>				
232	NoStipulations	Y*		NumInGroup	
→ 233	StipulationType	Y*	SIDE_ID (required)	String	
→ 234	StipulationValue	Y*	D	String	When StipulationType [233] = "SIDE_ID" (required) the possible values are: I = Message sent by the Requester D = Message sent by the Destination
	End <Stipulations>				
1	Account	N		String(5)	Position account code. Mandatory to make an offer
			1 = "AOTC"		
29*	LastCapacity	N	3 = "MTCH" 4 = "DEAL"	Char	Trading Capacity MiFIR. Mandatory to make an offer
58	Text	N		String	Reference
44	Price	N		Price	The Liquidity Provider must include the same information as in the original request
	Standard Trailer	Y			

### 13.6.4 Quote Response to cancel xRolling by initiator (Msg Type = AJ)

Message sent by the xRolling Requesting Party to request the cancellation of an RFQ or an RFQ conversation. The relevant fields are detailed here. The rest of fields are ignored in a QuoteRespType=5 (Done Away) in this trading mode.

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = AJ		
693	QuoteRespID	Y		String (10)	Message identifier
694	QuoteRespType	Y	5 = Done Away	Int	Value 5 to cancel all conversations
23	IOIID	Y*		String	RFQ identifier as assigned by the system
537	QuoteType	Y*	2 = RestrictedTradeable 4 = InitiallyTradeable	Int	Mandatory to indicate a xRolling related message Either value can be used.
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N		String	See section 4.3 - Parties block
→447	PartyIDSource	N	D = Proprietary/ Custom code	Char	
→452	PartyRole	N	11 = Order Origination Trader  13 = Order Origination Firm	Int	Indicates the role taken by the code specified in PartyID [448].
	End <Parties>				
	Start <Stipulations>				
232	NoStipulations	Y*		NumInGroup	
→ 233	StipulationType	Y*	SIDE_ID (requerido)	String	
→ 234	StipulationValue	Y*	I	String	When StipulationType [233] = "SIDE_ID" (required) the possible values are: I = Message sent by the Requester D = Message sent by the Destination
	End <Stipulations>				
	Standard Trailer	Y			



### 13.6.5 Execution Report sent by the Liquidity Provider to notify order status in the Stock Exchange (Msg Type = 8)

Message sent by the LP to inform about the status of the order sent to the Stock Exchange, including trades and unsolicited events.

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = 8		
37	OrderID	Y		String	RFQ identifier as assigned by the system
198	SecondaryOrderID	Y*		String	Order identifier, assigned by central system of the Stock Exchange
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N		String	See section 4.3 - Parties block
→447	PartyIDSource	N	D = Proprietary/ Custom code	Char	
→452	PartyRole	N	11 = Order Origination Trader  13 = Order Origination Firm	Int	Indicates the role taken by the code specified in PartyID.
	End <Parties>				
880	TrdMatchID	N		String	Trade registration number. Identifier of partial fill or filled order, assigned by Stock Exchange system.
					Mandatory when ExecType [150] = "F" (Trade)
17	ExecID	Y		String	Unique identifier of Execution Report assigned by HF MEFFGate
150	ExecType	Y	A = Pending New 0 = New 4 = Cancelled 6 = Pending Cancel 8 = Rejected C = Expired D = Restated F = Trade	Char	Indicates the status of the associated message, whereas OrdStatus [39] provides the current order status.
39	OrdStatus	Y	A = Pending New 0 = New 1 = Partially Filled 2 = Filled 4 = Cancelled 6 = Pending Cancel 8 = Rejected	Char	Indicates the current status of the order at the Stock Exchange
103	OrdRejReason	N	See codification table 20	Int	Rejection or cancellation motive. Present when ExecType [150] = 8
	Start <Instrument>				
55	Symbol	Y	Código de contrato	String(22)	Contract code associated with xRolling contract
48	SecurityID	N		String(12)	ISIN security code associated with order in the Stock Exchange
22	SecurityIDSource	N	4 = ISIN Number	String	

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	End <Instrument>				
54	Side	Y	1 = Buy 2 = Sell	Char	
	Start <OrderQtyData>				
38	OrderQty	Y*		Qty	Total Order volume, as indicated in the New Order message
	End <OrderQtyData>				
44	Price	Y*		Price	Order Price
15	Currency	N		Currency	Currency code (3 character) values using ISO 3166
32	LastQty	N		Qty	Volume on this fill. Mandatory when ExecType [150] = "F" (Trade)
31	LastPx	N		Price	Price of this fill. Mandatory when ExecType [150] = "F" (Trade)
151	LeavesQty	Y		Qty	Order volume pending Contains 0 when OrdStatus [39] = 4 (Cancelled) or 6 (Pending Cancel)
14	CumQty	Y		Qty	Total order volume filled
60	TransactTime	N		UTCTime stamp	Time when transaction represented by this Execution Report occurred.
381	GrossTradeAmt	N		Amt	Effective amount of this trade. Mandatory when ExecType [150] = "F" (Trade)
494	Designation	N		String	Origin of the trade. Mandatory when ExecType [150] = "F" (Trade) 1 Continuous Trading Other values: the trade took place during an auction
	Standard Trailer	Y			

### 13.6.6 Execution Ack for the Liquidity Provider (Msg Type = BN)

Message sent by HF MEFFGate to the LP to acknowledge the reception of the previous Execution Report

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = BN		
1180*	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181*	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
37	OrderID	Y		String	QuoteID related to the conversation relevant for this message
23	IOIID	N		String	RFQ identifier as assigned by the system
198	SecondaryOrderID	Y*		String	Order identifier, assigned by central system of the Stock Exchange
527	SecondaryExecID	N		String	Order history number, assigned by the central systems of MEFF or another market.
					Information equivalent to QuoteMsgID
1036	ExecAckStatus	Y	1 Accepted 2 Don't know	Char	
17	ExecID	Y		String	Execution Report ID of the acknowledged message
127	DKReason	N	A UnknownSymbol B WrongSide C QuantityExceedsOrder D NoMatchingOrder E PriceExceedsLimit G Missing mandatory field Z Other	Char	Informed if ExecAckStatus[1036]=2
*	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N		String	See section 4.3 - Parties block
→447	PartyIDSource	N	D = Proprietary/ Custom code 7 = Entering Firm	Char	
→452	PartyRole	N	11=Order Origination Trader 13=Order Origination Firm	Int	Indicates the role taken by the code specified in PartyID.

Tag	Nombre	Req	Valores válidos	Formato	Descripción
			35=Liquidity Provider		
End <Parties>					
880*	TrdMatchID	N		String	Trade registration number. Identifier of partial fill or filled order, assigned by Stock Exchange system.  Provided when ExecType [150] = "F" (Trade)
150*	ExecType	Y	A = Pending New 0 = New 4 = Cancelled 6 = Pending Cancel 8 = Rejected C = Expired D = Restated F = Trade	Char	Indicates the status of the associated message, whereas OrdStatus [39] provides the current order status.
39*	OrdStatus	Y	A = Pending New 0 = New 1 = Partially Filled 2 = Filled 4 = Cancelled 6 = Pending Cancel 8 = Rejected	Char	Indicates the current status of the order at the Stock Exchange
Start <Instrument>					
55	Symbol	Y	Código de contrato	String(22)	Contract code associated with order in the Stock Exchange
48	SecurityID	N		String(12)	ISIN security code associated with order in the Stock Exchange
22	SecurityIDSource	N	4 = ISIN Number	String	
End <Instrument>					
54	Side	Y	1 = Buy 2 = Sell	Char	
Start <OrderQtyData>					
38	OrderQty	N		Qty	Total Order volume, as indicated in the New Order message
End <OrderQtyData>					
44*	Price	N		Price	Order Price
15*	Currency	N		Currency	Currency code (3 character) values using ISO 3166
32	LastQty	N		Qty	Volume on this fill. Provided if OrdStatus [39] = 1 or 2
31	LastPx	N		Price	Price of this fill. Provided if OrdStatus [39] = 1 or 2
151*	LeavesQty	Y		Qty	Order volume pending Contains 0 when OrdStatus [39] = 4 (Cancelled) or 6 (Pending Cancel)
14	CumQty	Y		Qty	Total order volume filled
60*	TransactTime	N		UTCTime stamp	Time when transaction represented by the Execution Report occurred.

Tag	Nombre	Req	Valores válidos	Formato	Descripción
381*	GrossTradeAmt	N		Amt	Effective amount of this trade. Present when ExecType [150] = "F" (Trade),
	Standard Trailer	Y			

### 13.6.7 Execution Ack for the xRolling Requesting Party

Message sent by HF MEFFGate to the xRolling Requesting Party inform about the implicit status of the xRolling order, based on the status of the order in the Stock Exchange.

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = BN		
1180*	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181*	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
37	OrderID	Y		String	QuoteID related to the conversation relevant for this message
23	IOIID	N		String	RFQ identifier as assigned by the system
198	SecondaryOrderID	N		String	QuoteID related to the conversation relevant for this message
11	ClOrdID	N		String	Information equivalent to QuoteReqID. This field is only sent to the xRolling Requesting Party. Not included in messages to LP.
527	SecondaryExecID	N		String	Information equivalent to QuoteMsgID
1036	ExecAckStatus	Y	1 Accepted	Char	
17	ExecID	Y		String	Execution Report ID of the message sent by the Liquidity Provider
41	OrigClOrdID	N		String(30)	Original ClOrdID sent by the client. Only relevant for cancellations
*	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→448	PartyID	N		String	See section 4.3 - Parties block
→447	PartyIDSource	N	D = Proprietary/ Custom code  P = Short code identifier	Char	Value "P" for PartyRole [452] = 3, 12 or 122 Value "D" for the rest
→452	PartyRole	N	7 = Entering Firm (intermediary)  11 = Order Origination Trader  13 = Order Origination Firm  35 = Liquidity Provider	Int	Indicates the role taken by the code specified in PartyID.
	End <Parties>				

Tag	Nombre	Req	Valores válidos	Formato	Descripción
			0 = New		
			4 = Cancelled		
			5 = Replace		
			6 = Pending Cancel		
			8 = Rejected		
150*	ExecType	Y	A = Pending New C = Expired D = Restated E = Pending Replace I = Order Status L = Triggered	Char	Indicates the status of the associated message, whereas OrdStatus [39] provides the current order status.
			0 = New		
			1 = Partially Filled		
			2 = Filled		
			4 = Cancelled		
39*	OrdStatus	Y	6 = Pending Cancel 8 = Rejected A = Pending New E = Pending Replace	Char	Indicates the current status of the order at the Stock Exchange
			Start <Instrument>		
55	Symbol	Y	Código de contrato	String(22)	xRolling Contract code
48	SecurityID	N		String(12)	xRolling ISIN security code
22	SecurityIDSource	N	4 = ISIN Number	String	
			End <Instrument>		
			1 = Buy		
54	Side	Y	2 = Sell	Char	
			Start <Stipulations>		
232*	NoStipulations	S*		NumInGroup	
->233	StipulationType	N	RTS24_21	String	
->234	StipulationValue	N		String	When StipulationType [233] = "RTS24_21" the valid values are: NEWO = New order

Tag	Nombre	Req	Valores válidos	Formato	Descripción
					NECP = New order of the counterparty REME = Replaced by initiative of message receiver REMA = Replaced by Market Surveillance (automatic) REMH = Replaced by Market Surveillance (manual) RECP = Replaced due to change in the counterparty order CAME = Cancellation by initiative of message receiver CAMO = Cancellation by Surveillance CACP = Cancellation by counterparty REMO = Rejection EXPI = Order expired PARF = Partial fill FILL = Filled CHME = Change of status at the initiative of the member/participant of the trading venue CHMO = Change of status due to market operations
	End <Stipulations>				
	Start <OrderQtyData>				
38	OrderQty	N		Qty	Total Order volume
	End <OrderQtyData>				
44*	Price	N		Price	Order price
15*	Currency	N		Currency	Currency code (3 character) values using ISO 3166 Mandatory when ExecType [150] = "F" (Trade)
32	LastQty	N		Qty	Volume on this fill. Mandatory when ExecType [150] = "F" (Trade)
31	LastPx	N		Price	Price of this fill. Mandatory when ExecType [150] = "F" (Trade)
336*	TradingSessionID	N	118 = xRolling RFQ	String	Trading mode
151*	LeavesQty	Y		Qty	Order volume pending Contains 0 when OrdStatus [39] = 4 (Cancelled) or 6 (Pending Cancel)
14*	CumQty	Y		Qty	Total order volume filled
60*	TransactTime	N		UTCTime stamp	Time when transaction represented by this Execution Report occurred.
	Standard Trailer	Y			



### **13.6.8 Execution Report to notify executions in the xRolling RFQ trading mode (Msg Type=8)**

Once the Liquidity Provider notifies a trade execution in the Stock Exchange, a trade on the xRolling contract will be automatically created between the xRolling Requesting Party and the Liquidity Provider. Both will receive an Execution Report as described in section 7.9.4.

### 13.6.9 Quote Request reject to answer a Quote Request (Msg Type = AG)

Message sent by HF MEFFGate to reject a Quote Request

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = AG		
1180 *	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181 *	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
131	QuoteReqID	Y		String	Identifier of the rejected message
658	QuoteRequestReje ctReason	Y	See codification table 23	int	Rejection motive
	Start <QuotReqRjctGrp>				
146	NoRelatedSym	Y	1	NumInGroup	Always 1
	Start <Instrument>				
→55	Symbol	Y		String (22)	Contract code
→48	SecurityID	N		String(12)	ISIN security code
→22	SecurityIDSource	N	4 = ISIN Number	String	
	End <Instrument>				
	End <QuotReqRjctGrp>				
	Standard Trailer	Y			

### 13.7 Management of maximum position limit parameters set by LP

This functionality allows the Liquidity Providers to communicate to xRolling Requesting Party members to which it provides a service the maximum aggregated position bought and sold available for the complete set of customers of the Requesting Party.

Any change to these figures will be immediately confirmed to the LP and notified to the affected Member. At the beginning of the session the current values of these parameters will be published to both parties. These values will remain valid until a modification by the LP.

The MEFF system keeps a control that is based on the open position at the beginning of the day in customer accounts, and increases or decreases these counters according to the daily transactions in the Trading System. Any order that may result in the total position going beyond the values configured in the system will be rejected by the system.


As mentioned in section 3.7 Synchronisation at application level, when a client application starts a FIX protocol session, it receives the Registration Instructions Response messages with the maximum positions.

#### 13.7.1 Message list


Mensaje	Descripción
Registration Instructions (Msg Type = o) for maximum position LP-Requesting Party	Sent by the LP client application to manage the maximum xRolling position parameters
Registration Instructions Response (Msg Type = p)	Sent by HF MEFFGate to inform about maximum xRolling position parameters
Registration Instructions (Msg Type = o)	
Registration Instructions Response (Msg Type = p)	

#### 13.7.2 Message flow


##### Correct request to manage maximum xRolling position by a LP

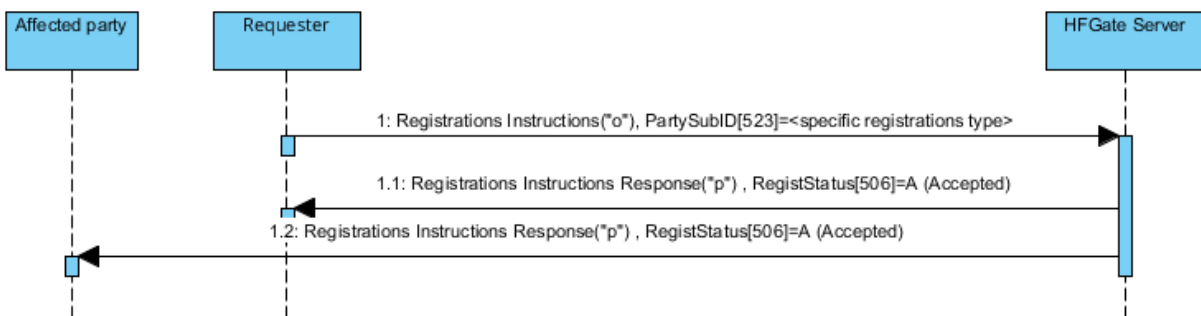

### Correct request by a LP to query current position consumed by a xRolling Requesting Party

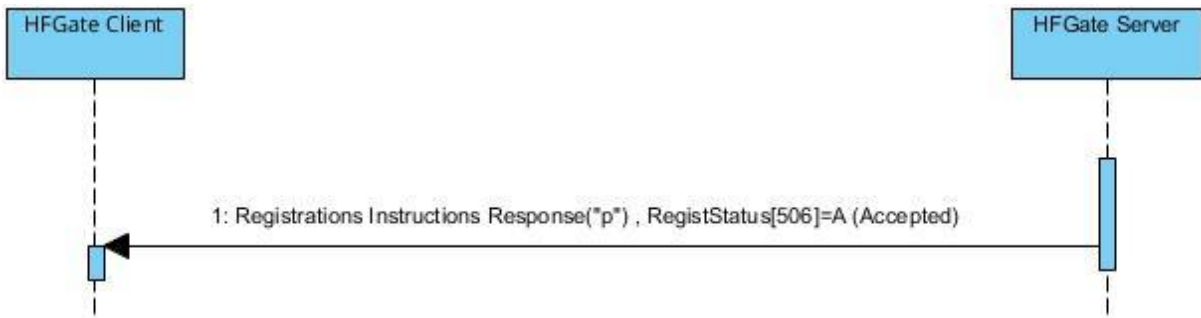

### Incorrect request

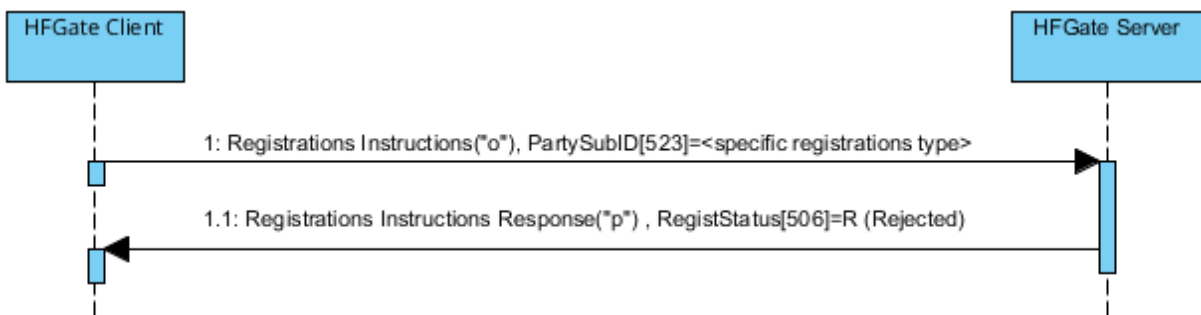

### 13.7.3 Annotations and adaptations of FIX 5.0

In the Registration Instructions message, the fields NoPartyIDs [453] and NoPartySubIDs [802] are now required

The field RejectText [1328] has been added to the Registration Instructions Response message

The blocks Instrument and Stipulations has been added as required to the Registration Instructions message

The blocks Instrument and Stipulations has been added to the Registration Instructions Response message

### 13.7.4 Registration Instructions (Msg Type = o) for maximum position LP-Requesting Party

Message sent by the LP client application to manage the configuration parameters of xRolling maximum position for a Member acting as xRolling Requesting Party

Tag	Nombre	Req	Valores válidos	Formato	Descripción
	Standard Header	Y	MsgType = o		
513	RegistID	Y	0 = New	String	Unique identifier for each Registration Instructions message
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Reference identifier for the RegistID (513) with Cancel and Replace RegistTransType (514) transaction types. Required if RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	Y*		NumInGroup	
→ 448	PartyID	Y*		String	Liquidity Provider (PartyRole[452]=35), and xRolling Requesting Party (PartyRole[452]=60)
→ 447	PartyIDSource	Y*	D = Proprietary / Custom code 7 = Entering Firm 13 = Order Origination Firm	String	
→ 452	PartyRole	Y*	35 = Liquidity Provider 60 = Introducing Broker (xRolling Requesting Party)	Int	
→ 802	NoPartySubIDs	Y*	1	NumInGroup	
→→ 523	PartySubID	Y*	xROLMP = Maximum xRolling position	String	
	End <Parties>				
	Start <Instrument>				
55*	Symbol	Y		String	
	End <Instrument>				
	Start <Stipulations>				
232*	NoStipulations	Y*		NumInGroup	

Tag	Nombre	Req	Valores válidos	Formato	Descripción
→ 233*	StipulationType	Y*	MAXPOSBUY = Maximum position bought  MAXPOSSELL = Maximum position sold	String	Amount corresponding to the maximum position (a numeric value >=0)
→ 234*	StipulationValue	Y*		String	If StipulationType [233] = "MAXPOSBUY": Nominal maximum that the PL is willing to buy in cash (corresponds to its limit for xRolling sales and the limit that the DR has to buy xRolling)  If StipulationType [233] = "MAXPOSSELL": Nominal maximum that the PL is willing to sell in cash (corresponds with its limit for xRolling purchases and with the limit that the DR has to sell xRolling)
	End <Stipulations>				
	Standard Trailer	S			

### 13.7.5 Registration Instructions Response (Msg Type = p) for maximum position LP-Requesting Party

Message sent by HF MEFFGate to inform the LP and the Member acting as xRolling Requesting Party about the values of the maximum xRolling position parameters.

This message is sent to the trader that made the request and to the affected traders.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
			0 = New		
514	RegistTransType	Y	1 = Replace 2 = Cancel	Char	
508	RegistRefID	N		String	Identifier of Registration Instructions message which is replaced or cancelled by this message. Included when RegistTransType = 1 or 2
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Liquidity Provider (PartyRole[452]=35), and xRolling Requesting Party (PartyRole[452]=60)
→ 447	PartyIDSource	N	D = Proprietary / Custom code 7 = Entering Firm 13 = Order Origination Firm	String	
→ 452	PartyRole	N	35 = Liquidity Provider 60 = Introducing Broker (xRolling Requesting Party)	Int	
→	NoPartySubIDs	N	1	NumInGroup	

Tag	Name	Req	Valid values	Format	Description
802					
→→ 523	PartySubID	N	xROLMP = Maximum xRolling position	String	
→→ 803	PartySubIDType	Y		Int	The content of this field should not be considered
	End <Parties>				
	Start <Instrument>				
55*	Symbol	Y		String	
	End <Instrument>				
	Start <Stipulations>				
232*	NoStipulations	N		NumInGroup	
→ 233*	StipulationType	N	MAXPOSBUY = Maximum position bought  MAXPOSSELL = Maximum position sold	String	
					Amount corresponding to the maximum position (a numeric value >=0)
→ 234*	StipulationValue	N		String	If StipulationType [233] = "MAXPOSBUY": Nominal maximum that the PL is willing to buy in cash (corresponds to its limit for xRolling sales and the limit that the DR has to buy xRolling)
					If StipulationType [233] = "MAXPOSSELL": Nominal maximum that the PL is willing to sell in cash (corresponds with its limit for xRolling purchases and with the limit that the DR has to sell xRolling)
	End <Stipulations>				
506	RegistStatus	Y	A = Accepted  R = Rejected	Char	Status of the Registration Instructions request message.
					If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
1328*	RejectText	N		String	If RegistStatus = "R" there is an explanation of the rejection
	Standard Trailer	Y			



### 13.7.6 Registration Instructions Response (Msg Type = p) to answer a query about current consumed position

Message sent by HF MEFFGate to inform the LP and xRolling Requesting Party about the values of parameters and current consumption. This message is sent to the trader that made the original request.

The last valid value of these parameters will be communicated to both parties at the beginning of the session and in the event of any change in these figures.

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = p		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
513	RegistID	Y		String	Identifier assigned by the client in the Registration Instructions message
514	RegistTransType	Y	1 = Replace	Char	
	Start <Parties>				
453	NoPartyIDs	N		NumInGroup	
→ 448	PartyID	N		String	Liquidity Provider (PartyRole[452]=35), and xRolling Requesting Party (PartyRole[452]=60)
→ 447	PartyIDSource	N	D = Proprietary / Custom code	String	
			13 = Order Origination Firm		
→ 452	PartyRole	N	35 = Liquidity Provider	Int	
			60 = Introducing Broker (xRolling Requesting Party)		
→ 802	NoPartySubIDs	N	1	NumInGroup	
→→ 523	PartySubID	N	xROLCP = Query about xRolling consumed position	String	
→→ 803	PartySubIDType	S		Int	The content of this field should not be considered
	End <Parties>				

Tag	Name	Req	Valid values	Format	Description
	Start <Instrument>				
55*	Symbol	S		String	
	End <Instrument>				
	Start <Stipulations>				
232*	NoStipulations	N		NumInGroup	
			MAXPOSBUY = Maximum position bought		
			MAXPOSSELL = Maximum position sold		
→ 233*	StipulationType	N	CURPOSBUY = Current position bought	String	
			CURPOSSELL = Current position sold		
					Number of contracts corresponding to the maximum position (a numeric value >=0)
					If StipulationType [233] = "MAXPOSBUY": Maximum number of contracts that the PL is willing to buy in cash (corresponds to its limit for xRolling sales and the limit that the DR has to buy xRolling) It is the maximum nominal purchase defined by the PL divided by the closing price / last cash
→ 234*	StipulationValue	N		String	If StipulationType [233] = "MAXPOSSELL": Maximum number of contracts that the PL is willing to sell in cash (corresponds to its limit for xRolling purchases and the limit that the DR has to sell xRolling) It is the maximum nominal sale defined by the PL divided by the closing price / last cash
					If StipulationType [233] = "CURPOSBUY": Balance in number of contracts that the PL has bought in cash (corresponds to the balance that the DR has bought in xRolling)

Tag	Name	Req	Valid values	Format	Description
					If StipulationType [233] = "CURPOSSELL": Balance in number of contracts that the PL has sold in cash (corresponds to the balance that the DR has sold in xRolling)
	End <Stipulations>				
506	RegistStatus	Y	A = Accepted R = Rejected	Char	Status of the Registration Instructions request message.  If it contains the value "R", there is an explanation for the rejection in the RejectText [1328] field
	Standard Trailer	Y			

## 14 Communication of Events

### 14.1 Introduction

This chapter describes two functionalities based on the News message:

Relay information from the market supervisor to one or more traders

Send messages of a trader to the market supervisor

In both cases the information transferred has a free text format.

A client program does not need to subscribe to receive these messages. Every client is implicitly subscribed from the start of the session.


On establishing a communications connection, if the client continues the FIX session he will receive all the pending News messages from the time of disconnection. When the client opts to begin a new FIX session, he receives all the News messages addressed to him that have been generated from the start of the session.

### 14.2 List of messages


Message	Description
News (Msg Type = B)	Used to receive text messages from the market supervisor. Also used to send text messages to the market supervisor

### 14.3 Message flow

#### Message reception

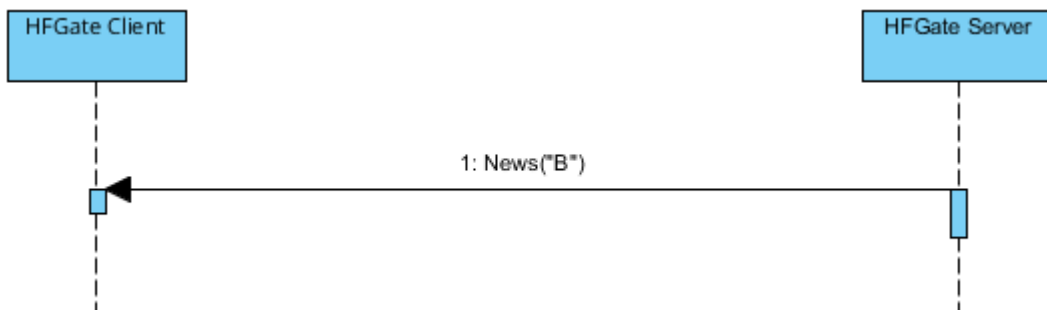

#### Sending message

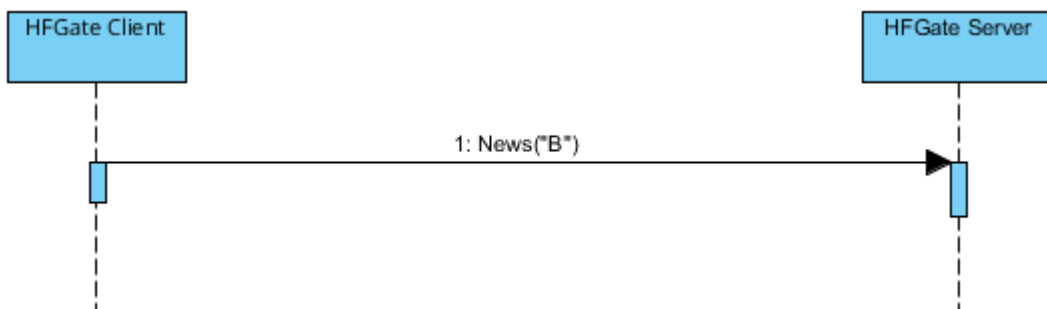

## 14.4 Annotations and adaptations of FIX 5.0

Only one line of up to 78 characters per message is allowed

### 14.5 Definition of messages

#### 14.5.1 News (Msg Type = B)

Tag	Name	Req	Valid values	Format	Description
	Standard Header	Y	MsgType = B		
1180	ApplID	N		String	Used in conjunction with ApplSeqNum [1181] to indicate, in subsequent connections, the point from which to receive information
1181	ApplSeqNum	N		SeqNum	Used in conjunction with ApplID [1180] to indicate, in subsequent connections, the point from which to receive information
42	OrigTime	N	0 = Normal	UTCTimeStamp	Event time
61	Urgency	N	1 = Flash 2 = Background	Char	The default value is 0
148	Headline	Y		String	Message header. Ignored by HF MEFFGate
33	LinesOfText	Y	1	NumInGroup	Number of lines of text. Only one line allowed
→58	Text	Y		String(78)	One line of text
	Standard Trailer	Y			

## MEFF Order Types

The following table sets out the different order types on MEFF with the FIX OrdType [40] and TimeInForce [59] fields:

MEFF Order Type	OrdType [40]	TimeInForce [59]	Allows instructions for automatic cancellation in the event of a disconnection
Limit order	Limit (2)	Day (0) GTD (6)	YES NO
Immediate limit order	Limit (2)	IOC (3)	N/A
Market order	Market (1)	Day (0)	YES
Stop limit order	Stop Limit (4)	Day (0) GTD (6)	YES NO
Fill or kill order	Limit (2)	FOK (4)	N/A
Auction price order	Market (1)	At Opening (2)	YES

Triggering Instructions for Stop limit orders. If component block <TriggeringInstruction> is not specified when the order is sent, then the Stop limit order is triggered at Last Trade:

BME Order Type	TriggerType [1100]	TriggerPriceType [1107]
Stop limit order	4 = Price Movement	1 = Best Offer 2 = Last Trade 3 = Best Bid 4 = Best Bid or Last Trade 5 = Best Offer or Last Trade 6 = Best Mid Bid-Offer

## User Fields

The following table shows the user fields that are found in the messages of this manual

Tag	Name	Format	Description
5678	ReceivePendings	Boolean	Indicates whether the receipt of Execution Reports pending confirmation is required or not
21501	LocalMktTimestamp	String	Indicates, for all tags in which a timestamp is included, the timestamp format:  Y - HF MEFFGate will send the local market time (all messages up to microseconds)  N - HF MEFFGate will send the the time in UTC format according to the FIX standard (all messages up to microseconds)  For more information see "4.6 - Timestamp format" Subscriptions identifier.
21502	AutoSubscriptionsID	String (10)	If this tag is informed, a subscription to Trading Session Status Request Security List Request, Market Data Request (+Indication of Interest) is implied.  Otherwise the classical behaviour is assumed.  For more information see "4.7 - Implied subscription to Trading Session Status Request, Security List Request and Market Data Request"
21503	ExecutionsOnly	Boolean	Indicates the user wants to receive trades only. Possible values are:  Y - Only Execution Report messages with ExecType [150] = F (Trade) are received. Also Quote Status Report messages will never be received  N (default) - Classical behaviour
21504	MaxMsgPerSecond	Int	Maximum number of messages per second that can be sent, as contracted for the client.  If the number of messages sent by the client application per second exceeds the number indicated, the client application could experience delays in processing the messages.
21505	BusinessSessionDate	LocalMkt Date	Current business session date.
21506	SelfMatchPreventionType	String	Self-Match Prevention Type. Indicates the behavior to follow when applying the Self-Match Prevention mechanism:

Tag	Name	Format	Description
			1 - reject aggressive order (default)
			2 - reject passive order
			3 - reject both orders: aggressive and passive



This material has been prepared by Bolsas y Mercados Españoles, Sociedad Holding de Mercados y Sistemas Financieros S. A. (BME), its subsidiaries, affiliates and/or their branches (together, "BME") for the exclusive use of the persons to whom BME delivers this material. This material or any of its content is not to be construed as a binding agreement, recommendation, investment advice, solicitation, invitation or offer to buy or sell financial information, products, solutions or services. The information does not reflect the firm positions (proprietary or third party) of the entities involved in the Spanish Securities Market. BME is under no obligation to update, revise or keep current the content of this material, and is subject to change without notice at any time. No representation, warranty, guarantee or undertaking – express or implied – is or will be given by BME as to the accuracy, completeness, sufficiency, suitability or reliability of the content of this material.

The opinions presented are theoretical and, therefore, the content hereof is intended for informational purposes only and should not be used for portfolio or asset valuations, or as the basis for any investment recommendations. Neither contributing Entities, nor Bolsas y Mercados Españoles, Sociedad Holding de Mercados y Sistemas Financieros S.A.(BME) nor any of its subsidiaries, accept responsibility for any financial loss or decision made based on the information contained in this material. In general, neither Bolsas y Mercados Españoles, Sociedad Holding de Mercados y Sistemas Financieros S. A. (BME) nor any of its subsidiaries, nor the contributing Entities, their directors, representatives, associates, subsidiaries, managers, partners, employees or advisors accept any responsibility for this information or unauthorised use of the same.

This material is property of BME and may not be printed, copied, reproduced, published, passed on, disclosed or distributed in any form without the express prior written consent of BME.

2023 Bolsas y Mercados Españoles, Sociedad Holding de Mercados y Sistemas Financieros S. A. All rights reserved.

---

BME  
Plaza de la Lealtad,1  
Palacio de la Bolsa  
28014 Madrid

[www.bolsasymercados.es](http://www.bolsasymercados.es)

